KING TONY

The brand you trust for life

2011

Congratulation

KING TONY -2010- TAIWAN SUPERIOR BRANDS

KING TONY
www.kingtony.com

The Brand
You Trust for Life

For over 25 years, KING TONY has been specializing in professional tools and serving as the “Tool expert with the best service". In addition to creating effective marketing strategies with the concept of “customer first” in mind, KING TONY has been focusing on international brand marketing, while developing other potential markets and setting up branch offices in France, Germany, Mexico, America, and China. With sales distribution channels in over 110 countries around the world, KING TONY has successfully established its own brand wordlwide. In the future, KING TONY continues to commit itself in enhancing its R&D and strict quality inspection in order to provide end-users with superior quality tools to boost their working efficiency and productivity.

Bicycle Tool Set

16PC.
Bicycle Compact Tool



20A16MR // 231

17PC.
Bicycle Compact Tool

20A17MR // 231

Aluminum Folding Hex Key Wrench Set

20317MR // 231

Aluminum Folding Tool Set

20306PR // 231

Service / Assurance

Mr. Charles Lai & Mr. Tony Lin founded a hot forge factory and specialized in forging business.....

In 1976, amidst a lack of capital and technology in Taiwan, Mr. Charles Lai & Mr. Tony Lin founded a hot forge factory specializing in making hand tools for the DIY market. Eight years later, many other companies had followed their lead and although the market grew quickly, quality suffered. With pricing, costs and quality nearing a state of chaos it became clear to King Tony's founders that they needed to seek a new direction.

Mr. Lai & Mr. Lin found their new direction; making professional quality hand tools built to compete with the best in the world. They set their standards high and in the years since, have consistently exceeded the requirements of the world's toughest standards. King Tony tools don't just meet the DIN (German) standard and the ANSI (U.S.A.) standard, they routinely exceed them. In fact, we test every torque make to a standard 30% higher than that prescribed by DIN and our pneumatic impact tools to a 50% higher standard. That's true commitment to quality!

To further underscore our determination to compete with the best in the world we have achieved certification with ISO on three separate standards. First, in January 1998, ISO 9002, followed by ISO 9001 and more recently we have qualified for the environmental safety standard, ISO 14001. We believe that is our responsibility to the world and we will always dedicate to reduce the harm to the earth during our manufacturing process in the future.

You might sense that King Tony Tools is about much more than a world-class tool. The ideals of King Tony's management are fulfilled daily by our hundreds of employee's at our branches and offices around the world. You will find King Tony Tools and its branches in: France, Germany, Spain, Mexico, U.S.A, China. Each of our local branch offices is tasked with insuring that you, our customer, are happy not just with our quality but with the experience of being a King Tony customer. That is how King Tony became known as; "The brand you trust for life."

KING TON

Responsibility / Satisfaction

BRANCHES :

- **France** :
  3 Rue des imprimeurs , ZI République Nord 1.
  86000 POITIERS , France.
- **Germany** :
  Wilhelmstrasse 11, D-69115 Heidelberg
- **Spain** :
  Paseo de la castellana , 241 4eB 28046 Madrid Spain
- **U.S.A.** :
  2432 Peck Rd. , City of industry , CA90601 , U.S.A.
- **Mexico** :
  * Av San Jose No. 15-A,Col. , Zona Industiral La Presa,
  C.P. 54187 Tlalnepantla, Edo. De Mexico
- **China** :
  259, Baita East Road , Suzhou , Jiangsu Sheng , China

Y TOOLS CORPORATION

Intellectual Property

New Registered Trade Mark

Please recognize King Tony's office registered trade mark.

Metric Size

Copyright by KINGTONY

Trade Mark Worldwide Registration

Algeria Australia Austria Belarus Belgium Bolivia Brazil Czech Republic Denmark Dominicana Egypt Estonia Germany Ghana Greece Guatemala Hungary Indonesia Japan Kazakhstan Laos Latvia Lebanon Libya Lithuania Morocco Malaysia Netherlands New Zealand North Korea Romania Russian Federation Saudi Arabia Singapore South Korea South Africa Spain Sweden Switzerland Tunisia U.S.A U.A.E United Kingdom Ukraine Vietnam

Sectional Drawing of Drain Flow Line

O	GOOD GRAIN FLOW LINE	KING TONY



X	BAD GRAIN FLOW LINE	OTHER BRAND

Imperial Size

Bulgaria Chile China Cyprus
Ethiopia Finland France
Iran Ireland Israel Italy
Luxembourg Malta Mexico
Portugal Poland Peru
Slovakia Slovenia
Syria Taiwan Thailand
Yemen Yugoslavia

Certificate

CE DVE DVE

Production process

Production process.....

>>>>>

Hot Forge

Grinding

Drilling

Heat Treatment

Vibrating

Plating

Marking

Lathing

De-Burring

Lathe Machining

Punching & Broaching

Sand Blast

Phosphate Sunk

Silk Printing

Strict and precise production as well as professional inspection

and testing equipment are the key point to guaranty the satisfaction of customers.

Inspection equipment.....

>>>>>

Environmental Simulation Test of Temperature & Humidity

Spectrometer

Insulated Test

Overhead Projector

Tension Tester

Tension Tester

Thickness Test of Plating

Grinding & Polish Machine

Product Gauge

Carton Busting Strength Tester

Hardness Tester

Micro Torque Tester

Salt-water Spray Tester

Micro Hardness Tester

Precise Cutting Machine

Mounting Press Machine

The Pliers Class Measure & Tester

2.5D Vision Measuring Machine

Inspection Equipment

Innovation | Electronic Torque Wrench

Safety instruction

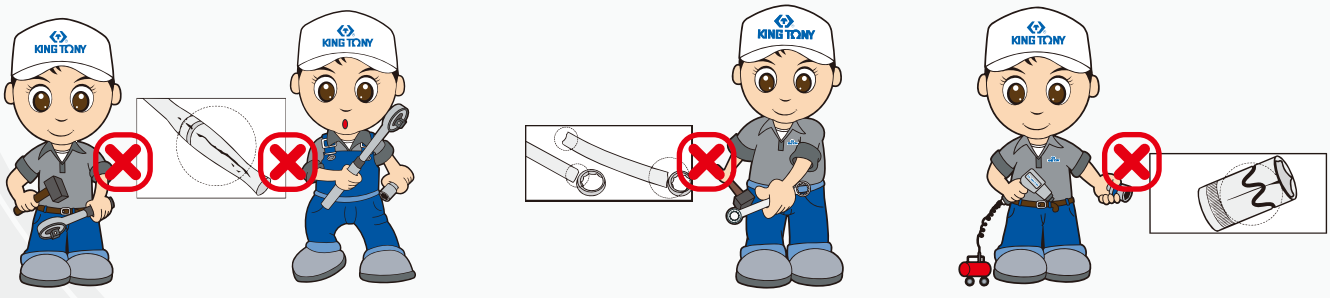

Electronic Torque Adapter

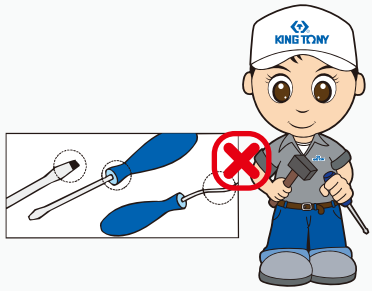

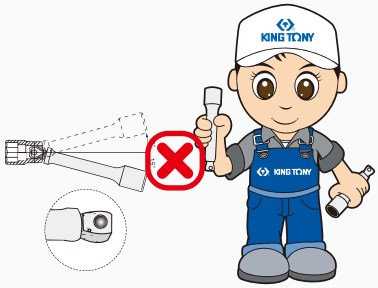

Torque Screwdriver

- Tolerance of torque within ±5% quality meets DIN ISO 6789 & ASME B107.14M-2004

Torque Multiplier

- *Reaction bar supplied in two styles for maximum versatility.*

- *Portable package brings convenience for use in different working places.*

- Torque multiplication with 1:5, accuracy guaranteed better than ± 5 %.

Set contents:

Multiplier head 1 pc

Reaction bar 2 pc

Open-Side Speed Wrench



The special ratcheting open end design will not slip off the screw when torque is applied.



The special curve design would not hurt the screw.

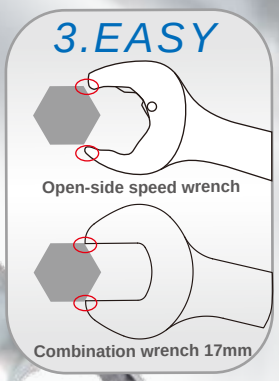

The wider design is easy to fit of the screw.

The special rack design that easy to lock the screw and more safe.



5.To protect rack without iron chippings damage.

6.HIGH TORQUE:
The standard of torque is 30% higher than ANSI.

Gift

Leather Male Wallet
ZS104
Size - 11 x 9 cm

Leather Wallet
For Business Card
ZS105
Size - 8.5 x11 cm

Briefcase (Leather) ZS107
Size - 40 x 29.5 x 8 cm

Briefcase (Nylon) ZS106
Size - 43 x 32 x 9 cm

Case for business card
ZS113
Size - 9.5 x 6.1 x 12 cm

Watch ZS203

CLASSIC

Leather Belt (Male) ZS108

Ball-Bearing Pen ZS405

Ballpoint Pen ZS403

Ballpoint Pen ZS402

Necktie
ZS520

Necktie Clip ZS521

WORK

Polo Shirt

ZS111- S	145~155 cm
ZS111- M	155~165 cm
ZS111- L	165~175 cm
ZS111- XL	175~185 cm
ZS111- XXL	185~190 cm

Work Hat
ZS110

Overall	Waist. (inch)	Hip (inch)
ZS112 - L	36"	44"
ZS112 - XL	40"	48"
ZS112 - 2L	44"	52"
ZS112 - 3L	48"	56"

Back

Front

Work Clothing

ZS109 - L	165 cm
ZS109 - XL	173 cm
ZS109 - 2L	180 cm
ZS109 - 3L	190 cm

Gift

Gift

Sticker
Size - 99 x 44 cm CPSTK-G1
Size - 50 x 22 cm CPSTK-G2
Size - 20 x 9.4 cm CPSTK-G3

Kingtony Big Flag
- 930 x 1430 mm
ADFLAG1

Kingtony Small Flag
- 25.4 x 16 cm
ADFLAG

Sticker / Length - 25 cm
ADHSTK-KT

Display Card ADVT-H
Ø - 452 mm

Sticker ADSTK-H
Ø - 150 mm

Display Card ADVT-P
Ø - 452 mm

Sticker ADSTK-P
Ø - 150 mm

Display Card ADVT-T
Ø - 452 mm

Sticker ADSTK-T
Ø - 150 mm

Display Card ADVT-A
Ø - 452 mm

Sticker ADSTK-A
Ø - 150 mm

SALES SUPPORT

Paperweight
ZS531

Paper Cup
ZS511

Key Ring
ZS524

Handy Bottle
ZS603

Hand Pressing
Flash Light
ZS208



Key Ring
ZS533

SALES
SUPPORT

Notepaper
ZS510

Key Ring
ZS522

Hand Bag
HAND BAG

Note Book
ZS512

Key Ring
ZS526

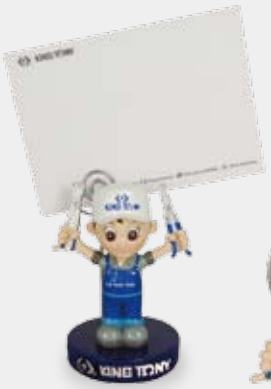

Paper Clip Of
Dr.Q Toy Figure
ZS529

Card Holder Of
Dr.Q Toy Figure
ZS535

Photo Frame Of
Dr.Q Toy Figure
ZS534

SIGN LIST

- Internal Hexagon
- External Hexagon
- Bi - Hexagon
- Spline Head
- Spline Head - Tamper Resistant
- Internal Torx
- External Torx
- External Torx - Tamper Resistant
- Double square
- Impact Socket
- Ribe Bit Socket
- Phillips Head
- POZIDRIV
- Slotted Head
- Internal Square
- External Square

- Accessory
- Impact Accessory
- Pin
- Tray
- Gear Puller
- Wrench
- Pliers
- Snips
- Hammer
- Tube Cutter
- Tool Box
- ISO
- CE Certificate
- G.S. Approval
- VDE Certificate
- Other

- Q'ty / Carton
- Q'ty / Box
- Weight (g)
- Insulated (1000V)
- Diameter (Ø)
- Capacity of open Jaw (mm)
- External Circlip
- Internal Circlip
- Circlip Pliers Head Size

Tool Storage

Tool Display ..... 1 ~ 2
Tool Trolley & Acessory ..... 7 ~ 15
Tool Chest & Box ..... 16 ~ 18
Tool Box & Set ..... 19 ~ 23
Tool Set Content ..... 24 ~ 34
Tool Box Set Content ..... 34 ~ 38

Socket & Accessory

1/4" (6.35) Drive — Socket · Ratchet · Accessory · Socket Set — 39 ~ 50
3/8" (9.53) Drive — Socket · Ratc het · Accessory · Bit Holder · Socket Set — 51 ~ 65
1/2" (12.7) Drive — Socket · Ratchet · Accessory · Socket Set — 66 ~ 89
3/4" (19.05) Drive — Socket · Ratchet & Accessory · Socket Set — 90 ~ 94
1" (25.4) Drive — Socket · Accessory & Socket Set — 95 ~ 96
Combination Socket Set — 97 ~ 102

Impact Socket & Accessory

1/4" (6.35) Drive — Socket — 103
3/8" (9.53) Drive — Socket · Accessory · Socket Set — 103~107
1/2" (12.7) Drive — Socket · Bit Socket · Accessory · Socket Set — 108~121
3/4" (19.05) Drive — Socket · Bit Socket · Accessory · Socket Set — 122~130
1" (25.4) Drive — Socket · Accessory · Socket Set — 131~137
1-1/2" (38.1) Drive — Impact Socket & Accessory — 138
#5 Spline Drive — 139

Pneumatic Tools

Impact Wrench — Impact Wrench · Composite Impact Wrench · Air Ratchet Wrench · Impact Screwdriver · Socket & Wrench Set — 141~153

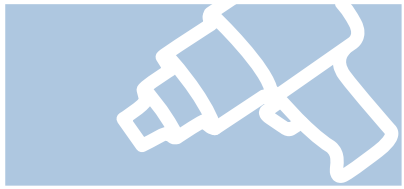

Torque Tools

Torque Wrench & Set — 155~164
Torque Screwdriver & Torque Angle Gauge & Torque Multiplier & Torque Teater — 165~166

Wrench

Wrench & Special Purpose Wrench — 167~187
T-shaped Driver & T-type Spark Plug Socket — 188~189
T-type Universal Joint & Socket Wrench — 189~192

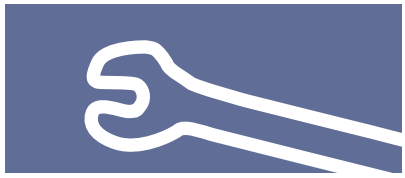

INDEX

Pliers

- Pliers 193~202

Snips & Cutter

- Snips 203~206
- Cutter 203~206

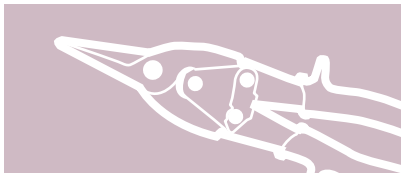

Screwdriver & Key & Bit

- Screwdriver 209~221
- Bit 221~230
- Key 221~230

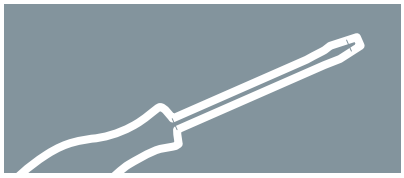

Other Tools

- Other Tools 241~250

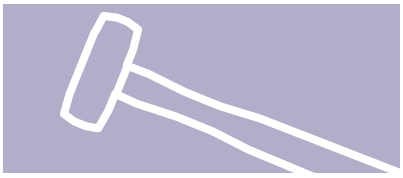

Automotive Tools

- Engine Series 251~256
- Undercar Series 257~264
- Body Series 265~269
- Battery & Electrical 270~271
- General Tools 272~277

Notes

Tool Storage

■ Tool Display ■ Tool Trolley ■ Tool Box ■ Tool Box Set ■ Tool Set

KING TONY

KING TONY

Tool display

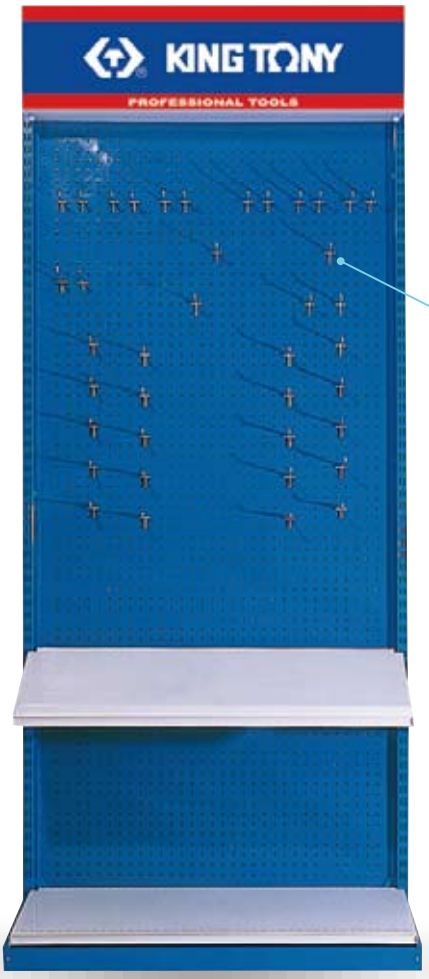

87301

Display Stand

Overall Size -
W 950 x D 500 x H 2230 mm
Attachment-
1 pc lamp case
2 pcs angled steel frames
2 pcs shelves
4 pcs steel plate with holes
40 pcs hooks

Display Hook

87301- 494 4" x Ø 4 mm
87301- 496 6" x Ø 5.2 mm
87301- 498 8" x Ø 5.2 mm

87203

Display Board

Wall hanging type
30 pcs hooks attached
Overall Size -
W 725 x D 14 x H 900 mm
Weight - 11.5 Kg
Cuft - 0.328

Screwdriver Shelf

Overall Size -
W 600 x D 240 x H 210 mm
Weight - 3.38 Kg
Cuft - 1.086

87105 / 87110 / 87111

Reference:

87105 (31416MR 209)
(31516MR 209)
87110 (31519MR 209)
87111 (31512MR 209)

91431

Hammer Hook

Overall Size -
W 40 x D 210 x H 240 mm
Weight - 411.6 g
Cuft - 0.072

87106

Individual pack
Finger - safe design socket insert
Housing material - PP
Lock pin is optional

Impact wrench display stand

Applied for 1/2"drive & 3/4"drive impact wrench
Steel plate with chrome plated
Air hose adapter attached

Applied Item

8772KT	30 x 63 mm	(1/4" drive socket)
8773KT	30 x 65 mm	(3/8" drive socket)
8774KT	44 x 85 mm	(1/2" drive socket)
8776KT	60 x 108 mm	(3/4" drive socket)

Pliers Hook

91421-01

Overall Size -
W 75 x D 130 x H 60 mm
Weight - 100 g
Cuft - 0.021

91421-11 Overall Size -
W 822 x D 130 x H 60 mm
Weight - 922 g
Cuft - 0.230

8711B

Metal Holder

Overall Size -
W 600 x D 240 x H 60 mm
Weight - 6.2 Kg
Cuft - 0.9

Reference:

1090PR1 242

87352

Bit Display Box

Overall Size -
W 318 x D 235 x H 183 mm
Weight - 1.3 Kg
Cuft - 0.4

(Example)

87103

Socket Shelf

Width can be adjustable offering to display multiple socket series
Single serial socket
size tab attached
Overall Size -
W 257 x D 297 x H 427 mm
Weight - 8.1 Kg
Cuft - 1.866

Reference:

4072MR / 4572MR 80
4072SR / 4572SR 80
4066MR / 4566MR 80
4066SR 80
4472MP/4472SP 121
4466MP/4466SP 121

Socket Hook

Special design in display stand (87301)
Zinc finishing

91403 (applied to 3/8" drive socket)
91404 (applied to 1/2" drive socket)
91406 (applied to 3/4" drive socket)
91408 (applied to 1" drive socket)

Holder For Other Tools

Tool display

Applied Item

8781007KT (applied to 1/4" Ratchet ,Slideing T- handle,Wrenches 6~12mm)
8781012KT (applied to 3/8" Ratchet ,Slideing T- handle,Wrenches 13~23mm)
8781013KT (applied to 1/2" Ratchet ,Slideing T- handle,Wrenches 13~23mm)
8781032KT (applied to 3/4" Ratchet ,Slideing T- handle,Wrenches 24~32mm)

Tool Trolley

87432-5B
87434-7B
87438-3B NEW

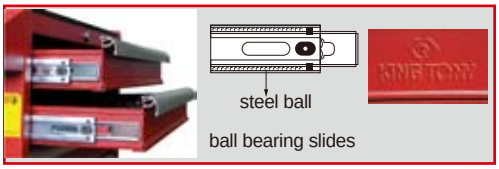



- 26 inch roll-wagon (with bulk storage compartment)
- Frame constructed with one piece steel sheet for integral strength
- 4 industrial casters can be loaded 300 kgs grossly (size: 5" x 1-1/4")
- Useful tool tray / special side handle for easy moving tool trolley
- Drawer slides type - ball bearing
- Grooved full width drawer pulls add strength and offer to list contents of drawer
- Central locking system
- 10mm Top mat
- Powder coating finish
- Overall size (mm)
  - 670(W) x 460(D) x 812(H)

87432-5B

87434-7B

87438-3B

	Spec.	Drawer Size (mm) Width x Depth x Height	category	kg	CUFT
87432-5B	5 Drawer	4-576 x 380 x 75 1-576 x 380 x 154 bulk-603 x 404 x 234	B3 B3	56	12.24
87434-7B	7 Drawer	5-579x380x56 2-579x380x123	B3 B3	64.0	
87438-3B	3 Drawer 2 Door	3-576 x 380 x 75 1-610 x 395 x 500	B3	48.5	

87432-5G
87434-7G

Risk - Free System
(Only One Drawer Can Be Opened At One Time)

- 26 inch roll-wagon (with bulk storage compartment)
- Frame constructed with one piece steel sheet for integral strength
- 4 industrial casters can be loaded 495 kgs grossly (size: 5" x 2")
- Useful tool tray / special side handle for easy moving tool trolley.
- Drawer slides type - ball bearing
- Grooved full width drawer pulls add strength and offer to list contents of drawer
- Central locking system
- 10mm Top mat
- Powder coating finish
- Overall size (mm)
  - 670(W) x 460(D) x 812(H)

87432-5G

87434-7G

	Spec.	Drawer Size (mm) Width x Depth x Height	category	kg	CUFT
87432-5G	5 Drawer	4-576 x 380 x 75 1-576 x 380 x 154 bulk-603 x 404 x 234	B3 B3	56	12.24
87434-7G	7 Drawer	5-579x380x73 2-579x380x154	B3 B3	64.0	

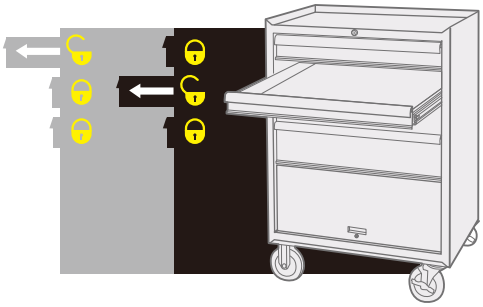

- Only open one drawer to prevent dump when moving the cabinet.
- Open one drawer, the other drawer are locked.

Tool Trolley

87441-1B

- 1 drawer trolley
- Two 3.5" deep trays are positioned for convenience

	Spec.	Drawer Size (mm) Width x Depth x Height	kg	CUFT
87441-1B	overall	720 x 410 x 750	24.6	2.7
	overall + 3" Casters	720 x 410 x 853		
	1 Drawer	572 x 275 x 65		

87441-1B

87441-3B

- 3 drawer trolley (ball bearing slide)
- 2 PC. protective mat for top and bottom shelves
- 3 PC. protective drawer liners

	Spec.	Drawer Size (mm) Width x Depth x Height	kg	CUFT
87441-3B	overall	720 x 410 x 750	33.0	3.94
	overall + 3" x 1-1/4" Casters	720 x 410 x 853		
	1 Drawer	572 x 275 x 65		
	2 Drawer	572 x 275 x 41		

87441-3B

Accessory

87432

- Drawer divider for cabinet :
  size : 570mm(W) x 380mm(D) x 45mm(H)

	Material	Drawer Divider Size (mm) Width x Depth x Height
87432-22	Steel	574 x 368 x 40
87432-23		568 x 265 x 40
87432-24	Plastic	570 x 370 x 40
87432-26		570 x 270 x 40



87432-22 / 87432-23

87432-24 / 87432-26

87432-15

- Plastic tray of parts for tool trolley
  87432-5B
- Overall size (mm)
  - 920(W) x 490(D) x 50(H)

87432-15

87432-52

- Paper holder :
  size : 45mm(H) x 290mm(L) x 65mm(D)

87432-52

Workstation

87502

- Workstation - 3 drawer chest
  Ball bearing slide
  2 wall cabinets

	Spec.	Width x Depth x Height (mm)	kg	CUFT
87502	overall	1500 x 700 x 1500	104.2	13.4
	3 Drawer chest	660 x 305 x 250		
	2 Drawer	572 x 270 x 41		
	1 Drawer	572 x 270 x 65		
	Wall cabinet	420 x 200 x 380		

Work bench excludes cutting board & tool holder

87502

Accessory

87502-11

Cutting board
- Oil-resistant, acid-resistant, moisture-resistant and anti-static
- Cutting board is adjustable on the workbench

87502-11

87502-12

4 PC. of adjusting device
- Included adjustable bolt & adjustable pad

87502-12

Tool holder excluded pliers, wrenches & screwdrivers

87502-01

- Tool holder 500mm, L

87502-01

87502-05

- 87502-050 U Shape hook
  87502-051 1" Shape hook
  87502-054 4" Shape hook
  87502-058 8" Shape hook

87502-05

87502-02

- Magnetic tool holder for workbench backpanel
  Size: 475 x 52 x 17mm

87502-02

87502-06

- 87502-061 1" Double hook
  87502-064 4" Double hook
  87502-068 8" Double hook

87502-06

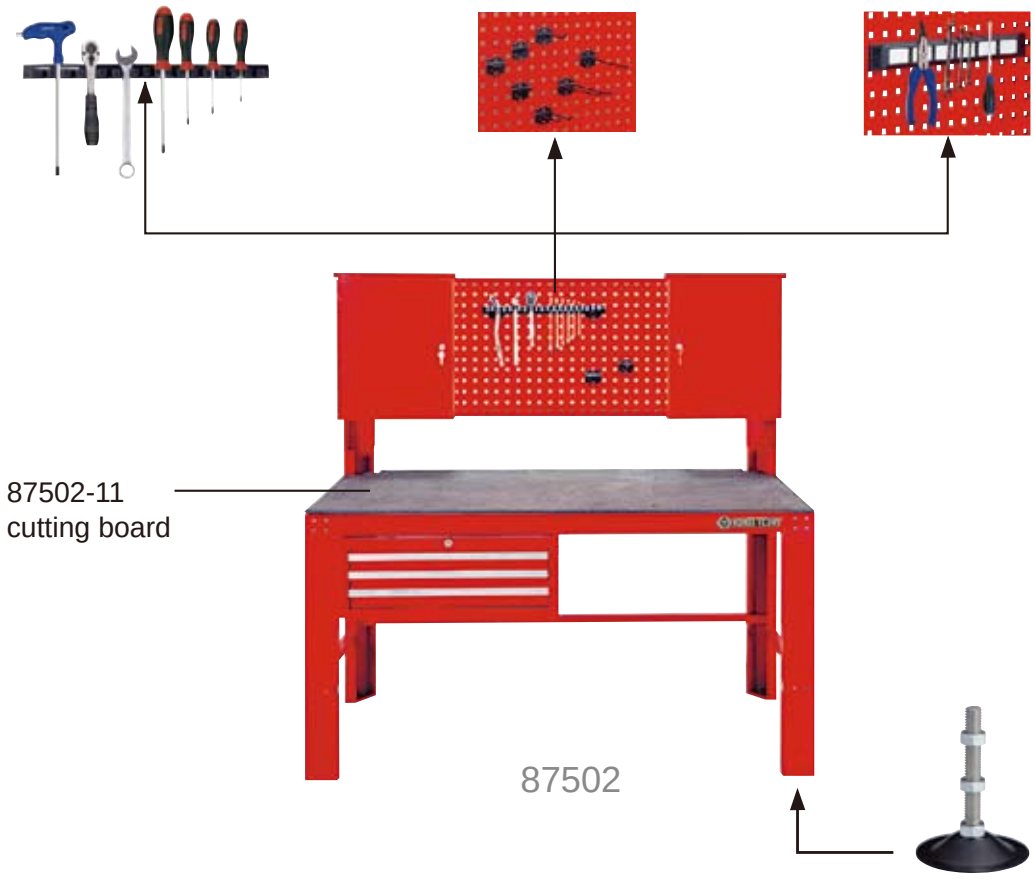

Tool Trolley & Set

Drawer slides type - ball bearing

ABS worktop matching tool chests

Floor brake

Drawer locking system
Central locking system

Useful tool tray /special side handle for easy moving tool trolley

The Way To Fill Your Drawer

HOW TO COMPLETE YOUR TOOL CHEST SET AND TOOL TROLLEY SET

The drawer of tool chest and tool trolley includes one top drawer and different size.

Drawer A1 (646x290 mm)



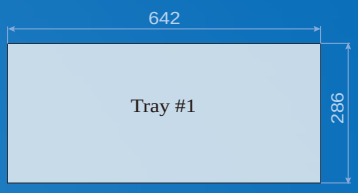

Drawer B1 (172x275 mm)





Drawer B2 (572x275 mm)









Drawer B3 (579x380 mm)





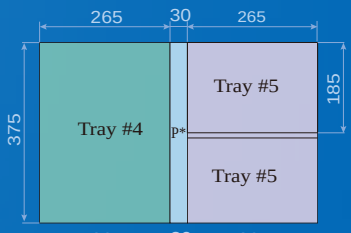



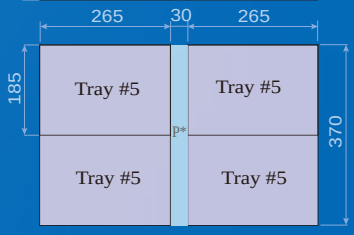

P* : Tray for parts

CAUTION

- Do not move the tool unit unless you have closed the cover and locked the drawers.
- Never open more than one loaded drawer at the same time.
- Watch for sharp edges, we suggest to put on gloves before you lift the unit.

Tool Trolley Set

Tool Trolley Set

941-000 MR

- 172 PC. tool trolley set
  Tool trolley:

941-000MR

87411-6B 17

87421-3B 17

87432-5B 3

Tray No.	Set	Use Drawer
Tray # 1	642 x 286 mm 9-4526MR 25	 A1
Tray # 4	375 x 265 mm 9-3523MR 31 9-1711MR 29 9-1216MR 28 9-90103PP 30 9-22108MR 29 9-22308PR 29	 B2  B2  B3
Tray # 5	265 x 185 mm 9-2526MR 32 9-4128FR 33 9-4119PR 32 9-4120PR 32 9-1303MR 33 9-20110MR 33 9-31106MR 33 9-40103GP 33 Tray for parts (375 x 30 mm) x 4 84700612B	 B2  B2  B3

	Spec.	kg	CUFT
941-000MR-A	87411-6B	28.4	3.97
941-000MR-B	87421-3B	17.5	2.71
941-000MR-C	87432-5B	63.5	11.84
941-000MR-D	172 PC. trolley contents	28.4	2.93

Tool Trolley Set

932-000 MR

- 173 PC. tool trolley set

932-000MR

Tool trolley:

87432-5B 3

Tray No.	Set	Use Drawer
Tray # 4	375 x 265 mm 9-4333MR 27 9-7540MR 28 9-1711MR 29 9-1216MR01 28 9-90103PP 30 9-40207GP 30 9-22108MR 29 9-22308PR 29 9-31110MR 29 9-90131MR 30	 B3
	 1006PR 243	Tray for parts (375 x 30 mm) x 5 84700612B

	Spec.	kg	CUFT
932-000MR-A	87432-5B	63.5	11.84
932-000MR-D	173 PC. trolley contents	24.7	1.97

Tool Trolley Set

932-008 MR

- 179 PC. tool trolley set

932-008MR

Tool trolley:

87432-5B 3

Tray No.	Set	Use Drawer
Tray # 4	375 x 265 mm 9-4522MR 27 9-3523MR 31 9-90315MR 28 9-1219MR01 28 9-31909PR 32 9-91120MR 29 9-40207GP 30 9-90103PP01 30	 B3
Tray # 5	265 x 185 mm 9-2526MR 32 9-4119PR 32 9-4120PR 32 9-31106MR 33	 B3
	 1010PR 243 9DC23 Tray for parts (375 x 30 mm) x 5 84700612B	

	Spec.	kg	CUFT
932-008MR-A	87432-5B	63.5	11.84
932-008MR-D	179 PC. trolley contents	20.5	1.97

Tool Trolley Set

934-001 MR

- 197 PC. tool trolley set

934-001MR

Tool trolley:

87434-7B 3

Tray No.	Set	Use Drawer
Tray # 6	532 x 375 mm 9-90408TQ 35	 B3
Tray # 4	375 x 265 mm 9-4516MR 27 9-5575MR 28 9-90310MR 30 9-90106SR 32 9-90205GN01 31 9-1218MR 28 9-1711MR 29 9-22108MR 29 9-31909PR 32	 B3
Tray # 5	265 x 185 mm 9-4128FR 33 9-40103GP 33 42114GP 199	 B3
	 2121-18 14210212 14226512 213 7962-04 246 7963-04 246	
	 1108MR 171 9DC23 Tray for parts (375 x 30 mm) x 5 84700612B	

	Spec.	kg	CUFT
934-001MR-A	87434-7B	64.0	12.32
934-001MR-D	197 PC. trolley contents	28.7	1.97

Tool Trolley Set

932-010 MR

- 144 PC. tool trolley set

932-010MR

Tool trolley:

87432-5B 3

Tray No.	Set	Use Drawer
Tray # 4	375 x 265 mm 9-4328MR 27 9-5575MR 28 9-1216MR01 28 9-1709MR 29 9-90106SR 32	 B3
Tray # 5	265 x 185 mm 9-31106MR 33 9-40103GP 33	 B3
 34423-1A 164	Tray for parts (375 x 30 mm) x 3 84700612B	

	Spec.	kg	CUFT
932-010MR-A	87432-5B	63.5	11.84
932-010MR-D	144 PC. trolley contents	17.5	1.97

Tool Trolley Set

932-009 MR

- 101 PC. tool trolley set

932-009MR

Tool trolley:

87432-5B 3

Tray No.	Set	Use Drawer
Tray # 4	375 x 265 mm 9-4333MR 27 9-1711MR 29 9-1219MR01 28 9-90106SR 32	 B3
Tray # 5	265 x 185 mm 9-4120PR 32 9-4119PR 32 9-40103GP 33	 B3
	 34423-1A 164 1110MR 171	Tray for parts (375 x 30 mm) x 3 84700612B

	Spec.	kg	CUFT
932-009MR-A	87432-5B	63.5	11.84
932-009MR-D	98 PC. trolley contents	19.8	1.97

Tool Trolley Set

938-001 MR NEW

- 77 PC. tool trolley set

938-001MR

Tool trolley:

87438-3B 3

Tray No.	Set	Use Drawer
Tray # 4	375 x 265 mm 9-1219MR01 28 9-1711MR 29 9-40207GP 30 9-22308PR 29 9-31110MR 29 9-4522MR 27	 B3

	Spec.	kg	CUFT
938-001MR-A	87438-3B	50	12.03
938-001MR-D	77 PC. trolley contents	12.24	1.64

Tool Box

87411-6B

- 6 drawer chest
- Heavy gauge steel and flange reinforced design
- Drawer slides type-ball bearing
- Grooved full width drawer pulls add strength and offer to list contents of drawer
- Central locking system
- Powder coating finish
- With drawer liners and 4 bottom rubber mats
- Overall size (mm)- 660(W) x 305(D) x 380(H)

87411-6B

ball bearing slides



steel ball

bottom rubber mats to avoid slipping

Carrying handle

Handle

KING TONY	Drawer Size (mm) Width x Depth x Height	Category	kg	CUFT
87411-6B	**TOP** -646 x 290 x 60 **3**-172 x 275 x 41 **2**-572 x 275 x 41 **1**-572 x 275 x 65	A1 B1 B2 B2	25.4	3.97'

87411-9B NEW

- 9 drawer chest
- Heavy gauge steel and flange reinforced design
- Drawer slides type-ball bearing
- Grooved full width drawer pulls add strength and offer to list contents of drawer
- Central locking system
- Powder coating finish
- With drawer liners and 4 bottom rubber mats
- Overall size (mm)- 660(W) x 307(D) x 427(H)

87411-9B

ball bearing slides



steel ball

bottom rubber mats to avoid slipping

Carrying handle

Handle

KING TONY	Drawer Size (mm) Width x Depth x Height	Category	kg	CUFT
87411-9B	**TOP** -646 x 290 x 60 **6**-170 x 275 x 50 **2**-569 x 275 x 50 **1**-569 x 275 x 75	A1 B1 B2 B2	30.2	4.3'

87421-3B

- 3 drawer chest
- Intermediate type
- Heavy gauge steel and flange reinforced design
- Drawer slides type-ball bearing
- Grooved full width drawer pulls add strength and offer to list contents of drawer
- Central locking system
- 10mm Top mat
- Powder coating finish
- 4 pins on the middle chest corners to tie in with top chest for extra security
- Overall size (mm) - 660(W) x 305(D) x 250(H)

87421-3B

ball bearing slides



steel ball



KING TONY	Drawer Size (mm) Width x Depth x Height	Category	kg	CUFT
87421-3B	**2**-572 x 275 x 41 **1**-572 x 275 x 65	B2	15.2	2.60'

Portable Tool Box

87401

- Heavy gauge steel plus flange reinforced design
- Cover closing synchronously locks all of the drawer
- Powder coating
- Overall size (mm) - 535(W) x 220(D) x 290(H)

87401-2

87401-3

KING TONY	Spec.	Drawer Size (mm) Width x Depth x Height	kg	CUFT
87401-2	2 drawer	505 x 195 x 65	8.8	2.05
87401-3	3 drawer	505 x 195 x 45	10.21	
NEW **87401-3H**	3 drawer	504 x 195 x 52	11.2	

87401-3H

external lock system

ball bearing slides



steel ball

Tool Box

87402

- 3 section fold up type
- Tubular handle, curved hinge and flange reinforced design
- Shaped pressing on flat surface to reinforced steel strength
- Adjustable handle



KING TONY	Spec.	Drawer Size (mm) Width x Depth x Height	kg	CUFT
87402	5 compartments	470 x 220 x 255	5.60	1.22

87407

- Meterial : PP
- Multi-function box, extra space for tools and parts
- Light weight
- Durable design for tool storage

87407

Specification.	Overall size (mm)	kg	CUFT
2 compartments	445(W) x 240(D) x 206(H)	1.74	0.79

Fabric Tool Box

87711C

NEW

- Heavy duty design:Very high strength denier fabric, Aluminium handle.
- Protection and comfort : Leather grip, Padded shoulder strap, Closing flap.
- Handy storage : Elastic tool retaining strap, Special screwdriver partition, Easy access to the tool compartment, Large number of side pockets, Adjustable saw compartment with self-adhesive strips, Flap top storage pouch.

KING TONY	Overall size (mm)	kg	
87711C	550(W)x285(D)x370(H)	3	1 / 1

Tool Box Set

911-000 CR
911-000 CR01
911-000 CR02

- 219 PC. tool box set

Tool box:

87411-6B 16

Tray No.	Set	Use Drawer
Tray # 1	642 x 286 mm 9-7069CR 24 (911-000CR use)  9-7069CR01 24 (911-000CR01 use 911-000CR02)	 A1
Tray # 2	172 x 257 mm 9-42114GP 26 9-40102GP 26 9-2548CR 25 (911-000CR 911-000CR01 use) 9-2548CR01 25 911-000CR02 use	 B1
Tray # 3	554 x 260 mm 9-90128SR 26 9-90129CR 26 9-90138CR 26	 B2
	 7911-12 248	

	Spec.	kg	CUFT
911-000CR-A	87411-6B	24.8	3.97
911-000CR-D	219 PC. trolley contents	23.3	1.69
911-000CR01-A	87411-6B	24.8	3.97
911-000CR01-D	219 PC. trolley contents	23.3	1.69
911-000CR02-A	87411-6B	24.8	3.97
911-000CR02-D	219 PC. trolley contents	23.3	1.69

Tool Box Set

901-068 MR
901-069 MR

- 69 PC. tool box set

Tray No.	Set	Use Drawer
Tray # 1	500 x 195 mm 9-4338MR 34 (901-069MR use) 9-4338MR01 34 (901-068MR use)	 A1
Tray # 3	554 x 260 mm 9-90121MR 35 9-90104GP 35 9-31006MR 36	 B2

901-073 MR

- 74 PC. tool box set

Tray # 1	642 x 286 mm 9-4338MR03 34	 A1
Tray # 3	554 x 260 mm 9-90126MR 35 9-90104GP 35 9-31006MR 35	 B2

Tool box:

87401-3 17

	Drawer Size (mm) Width x Depth x Height	kg	CUFT
901-068MR	505 x 195 x 65	18.8	1.98
901-069MR		18.4	
901-073MR		19.5	

Tool Box Set

902-062 MR

- 62 PC. tool box set

KING TONY	Contents
902-062MR	9-4116FR 36 9-1217MR 37 9-90120MR 38 9-30206MR 37 9-4319MR 36 9-40203GP 38

kg	CUFT	Overall size (mm)
15.9	1.22	470(W) x 220(D) x 255(H)

902-065 MR
902-065 MR04

- 65 PC. tool box set

KING TONY	Contents
902-065MR	9-4116FR 36 9-4319MR 36 1421 No.1 x 80 No.2 x 38 No.3 x 150 1422 5.5 x 100 6.5 x 38 8 x 175 9-90115MR01 38 9-1716MR 37
902-065MR04	3611-08P 6111-07 6311-06 6511-10A 76104-05 76217-06 76223-08 76403-05 76405-65 76404-06 76406-07 7811-16 9-1606MR01 37 9-90125MR 38

kg	CUFT	Overall size (mm)
14.7	1.22	470(W) x 220(D) x 255(H)

Tool Box Set

902-068 MR

- 68 PC. tool box set

KING TONY	Contents
902-068MR	9-4116FR 36 9-4319MR01 36 1060 8 10 11 12 13 14 15 16 17 18 19 21 22 24 1120M 1.5 2 2.5 3 4 5 6 8 10 1421 ⊕ NO. 1 X 80 NO. 2 X 38 NO. 3 X 150 1422 ⊖ 5.5 x 100 6.5 x 38 8 x 175 6111-07 6311-06 6511-10A 3611-12P 7821-30 7911-12 76104-05 76217-06 76223-08 76403-05 76405-65 76404-06 76406-07

kg	CUFT	Overall size (mm)
15.9	1.22	470(W) x 220(D) x 255(H)

902-089 MR01

- 88 PC. tool box set

KING TONY	Contents
902-089MR01	9-4116FR 36 9-4319MR01 36 1812MR 186 1060 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 24 1120M 1.5 2 2.5 3 4 5 6 8 10 1147 T10 T15 T20 T25 T27 T30 T40 1900 6x7 8x10 11x13 12x13 17x19 22x24 1421 ⊕ NO. 2 X 38 NO. 3 X 150 1422 ⊖ 3 x 75 5 x 100 6111-07 6311-06 6516-10 3611-08R 7821-80 7911-12

kg	CUFT	Overall size (mm)
17.7	1.22	470(W) x 220(D) x 255(H)

Tool Box Set

902-103 MR

- 103 PC. tool box set

KING TONY	Contents
902-103MR	9-4116FR 37 1812MR 186 9-4319MR01 36 1060 — 8 9 10 11 12 13 14 15 16 17 18 19 21 22 23 24 27 30 32 1120M — 1.5 2 2.5 3 4 5 6 8 10 1147 — T10 T15 T20 T25 T27 T30 T40 1421 ⊕ — NO. 0 X 60 NO. 1 X 100 NO. 2 X 100 NO. 3 X 150 1422 ⊖ — 3 X 75 4 X 100 5 X 75 5.5 X 125 6.5 X 150 8 X 175 6111-07 6311-06 6231-08 6516-10 6431-10 6011-10R 3611-12R 7821-80 7911-12 79083-03C 76220-07 76226-12 76402-45 76403-05 76404-06 76405-65 76406-07 76408-08 76412-09 76414-10

kg	CUFT	Overall size (mm)
25.5	1.22	470(W) x 220(D) x 255(H)

Tool Set Content

Tray category #1 (642 x 286mm)

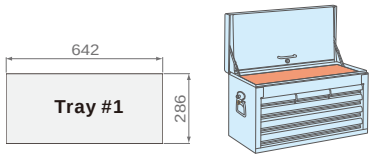

Drawer A1(646x290)

9-4526 MR

	Contents	kg	
9-4526MR	4335M: 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 27 30 32 463521 4768-10F 4452-15F 4251-05 4251-10 4572-12	4.6	5

9-4526MR

9-7069 CR / CR01

	Contents		kg	
9-7069CR	3330M: 6 7 8 9 10 11 12 13 14 15 16 17 19 20 21 22 3330S: 3/8 7/16 1/2 9/16 5/8 11/16 3/4 13/16 4330M: 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 27 30 32 4330S: 3/8 7/16 1/2 9/16 5/8 11/16 3/4 13/16 7/8 15/16 1	3779-08G 4779-10G	8.8	4
9-7069CR01	463521 463516 3792 4791 3812 4813 3452-08F 4452-15F 3221-03 3221-06 4251-05 4251-10 3571-08 4572-10 7911-12	3769-08P 4768-10P	8.8	

9-7069CR

9-7069CR01

Tray category #2 (163 x 263mm)



Drawer B1(172x275)

9-2548 CR / CR01

	Contents		kg	
9-2548CR	2235M: 4 5 5.5 6 7 8 9 10 11 12 13 2235S: 5/32 3/16 7/32 1/4 9/32 5/16 11/32 3/8 7/16 1/2 2335M: 4 4.5 5 5.5 6 7 8 9 10 11 12 13	2779-55G	1.28	10
9-2548CR01	2335S: 5/32 3/16 7/32 1/4 9/32 5/16 11/32 3/8 7/16 1/2 2792 2813 2221-02 2221-04	2769-55P	1.28	

9-2548CR

9-2548CR01

Tool Set Content

Tray category #2 (163 x 263mm)





Drawer B1(172x275)

9-40102GP

	Contents	kg	
9-40102GP	6011-10R 6511-10A	1.0	10

9-40102GP

9-42114GP

	Contents	kg	
9-42114GP	68SS-07 68HS-07 68SB-07 68HB-07	0.6	10

9-42114GP

Tray category #3 (554 x 260mm)







Drawer B2(572x275)

9-90128 SR

	Contents			
9-90128SR	5060 1/4 5/16 3/8 7/16 1/2 9/16 5/8 11/16 3/4 13/16 7/8 1 5970 1/4 x 5/16 3/8 x 7/16 1/2 x 9/16 5/8 x 11/16 3/4 x 7/8 15/16 x 1 1-1/16 x 1-1/8	76105-06 7811-16	76215-05 76217-06 76220-07 76224-10	76404-06 76406-07 76408-08

9-90128SR

kg	
4.8	4

9-90129 CR

	Contents			
9-90129CR	1421 No.0x60 No.1x80 No.2x38 No.2x100 No.3x150 1422 3x75 6.5x38 6.5x100 6.5x150 8x175 1130S 3/32 1/8 5/32 3/16 1/4 5/16 3/8 1120M 1.5 2 2.5 3 4 5 6 8 10	6111-07	6231-07	6311-06

9-90129CR

kg	
2.5	4

Tool Set Content

Tray category #4 (375 x 265mm)





Drawer B2(572x275)





Drawer B3(579x380)



9-90138 CR

	Contents
9-90138CR	1060 6 7 8 9 10 11 12 13 14 15 16 17 19 20 21 1900 8x9 10x11 12x13 14x15 18x19 1970 6x7 8x9 10x11 12x13 14x15 16x17 18x19 1930 10x11 12x14 14x17 5900 1/4x5/16 3/8x7/16 7/16x1/2 9/16x5/8 11/16x3/4 13/16x7/8 3611-08P 3611-12P

9-90138CR

kg	
4.8	4

9-4328 MR

	Contents	kg	
9-4328MR	4335M 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 27 29 32 4027 T55 T60 4791 4768-10F 4251-05 4251-10 4452-15 4572-10	4.6	6

9-4328MR

9-4333 MR

	Contents	kg	
9-4333MR	4335M 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 32 463516 463521 4791 4251-03 4251-05 4251-10 4452-15F 4572-12 4755-10G	5.4	6

9-4333MR

9-4516 MR

	Contents	kg	
9-4516MR	4335M 8 10 11 12 13 14 17 19 21 23 24 4791 4768-10F 4452-15F 4251-05 4251-10	3.12	10

9-4516MR

Tool Set Content

Tray category #4 (375 x 265mm)



Drawer B3(579x380)



9-4522 MR

	Contents	kg	
9-4522MR	4335M 8 10 11 12 13 14 15 16 17 18 19 20 21 22 24 4791 4768-10F 4251-03 4251-05 4251-10 463516 463521	2.96	5

9-4522MR

9-5575 MR

	Contents		
9-5575MR	2335M 4 4.5 5 5.5 6 7 8 9 10 11 12 13 3335M 6 7 8 9 10 11 12 13 14 15 16 17 18 19 21 22 2375M E4 E5 E6 E7 E8 3375M E10 E12 E14 E16 E18 366516 366521 2792 3792 2769-55F 2452-05F 3769-08F 3452-08F 2571-45 3571-08 3789-11F 2221-02 2221-04 3221-03 3221-06 3221-16	3235M 8 10 12 14 17 2335S 1/4 3/8 1/2 3027M T40 T45 T50 2037M T10 T15 T20 T25 T27 T30 2033M T20 T25 T30 T40	

9-5575MR

kg	
4.15	6

9-7540 MR

	Contents	kg	
9-7540MR	2335M 4 4.5 5 5.5 6 7 8 9 10 11 12 13 2375M E4 E5 E6 E7 E8 4375M E10 E12 E14 E16 E18 E20 4435M 10 11 12 13 14 17 19 21 22 24 2792 2755-55G 2571-45 2452-05F 2177DF 2221-02 / 2221-04	3.50	5

9-7540MR

Tool Set Content

Tray category #4 (375 x 265mm)

9-1216 MR 9-1216 MR01
9-1218 MR 9-1219 MR01

	Contents	kg	
9-1216MR	1060: 6 8 10 12 13 14 16 17 19 21 22 24 26 27 29 32	3.20	6
9-1216MR01	1060: 6 8 10 11 13 14 16 17 18 19 21 22 24 27 30 32	3.20	6
9-1218MR	1060: 6 7 8 10 11 12 13 14 15 16 17 18 19 21 22 24 1930: 8 x 10 9 x 11	2.12	6
9-1219MR01	1060: 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24	2.25	6

9-1216MR

9-1216MR01

9-1218MR

9-1219MR01

9-90315 MR

	Contents	kg	
9-90315MR	1900: 8x10, 10x12, 12x14, 14x17, 17x19, 21x23, 22x24 1970: 8x10, 10x12, 12x14, 14x17, 17x19, 21x23 22x24 79083-05C	2.6	6

9-90315MR

9-1709 MR 9-1711 MR

	Contents	kg	
9-1709MR	1970: 8 x 9 10 x 12 11 x 13 12 x 14 14 x 17 17 x 19 19 x 21 22 x 24 23 x 26	2.38	6
9-1711MR	1970: 6 x 7 8 x 9 10 x 11 12 x 13 14 x 15 16 x 17 18 x 19 20 x 22 21 x 23 24 x 27 30 x 32	2.80	6

9-1709MR

9-1711MR

9-90109 MN

	Contents	kg	
9-90109MN	1970: 8x10 10x12 11x13 12x14 14x17 17x19 6011-10N 3611-12R	2.28	6

9-90109MN

9-91120 MR

	Contents	kg	
9-91120MR	1120: 1.5 2 2.5 3 4 5 6 8 10 1930: 8x10 10x12 11x13 14x17 3731: 8 10 12 13 14 3611-12R 6011-10N	2.40	6

9-91120MR

Tool Set Content

Tray category #4 (375 x 265mm)







Drawer B2(572x275)



Drawer B3(579x380)



9-22108 MR 9-22308 PR

	Contents	kg	
9-22108MR	1160 2 2.5 3 4 5 6 8 10	1.10	10
9-22308PR	1163 T10 T15 T20 T25 T30 T40 T45 T50	1.10	10

9-22108MR

9-22308PR

9-31110 MR

	Contents	kg	
9-31110MR	1421 NO. 1 X 80 NO. 2 X 38 NO. 2 X 100 NO.3 X 150 1422 3 X 75 4 X 100 5.5 X 125 6.5 X 35 6.5X150 8 X 175	1.0	10

9-31110MR

9-90310 MR

	Contents	kg	
9-90310MR	1411 NO.1x100 NO.2x100 NO.3x150 1412 5.5x100 6.5x100 8.0x150 76220-07 9CJ2120 14324003 24110214	1.08	6

9-90310MR

9-40207 GP

	Contents	kg	
9-40207GP	6111-08 6211-06 6311-06 68HS-07 68HB-07 68SS-07 68SB-07	1.5	10

9-40207GP

9-40207 GP01

	Contents	kg	
9-40207GP01	6211-06 6311-06 6463-08 67HS-07 67HB-07 67SS-07 67SB-07	1.5	6

9-40207GP01

Tool Set Content

Tray category #4 (375 x 265mm)







Drawer B2(572x275)



Drawer B3(579x380)



9-90103 PP 9-90103 PP01

	Contents	kg	
9-90103PP	3611-12P; 6511-10A; 7821-30	2.3	5
9-90103PP01	3611-12P; 6511-10A; 7811-16	2.3	5

9-90103PP

9-90103PP01

9-90131 MR

	Contents	kg	
9-90131MR	4033 T20 T25 T27 T30 T40 T45 T50 T55 T60 4035 4 5 6 7 8 10 12 14 17 1120M 1.5 2 2.5 3 4 5 6 8 10 1930 10 X 11 12 X 14 14 X 17 3204 (Ø 60 ~ 140)	3.1	10

9-90131MR

9-3523 MR

	Contents	kg	
9-3523MR	3335M: 6 7 8 9 10 11 12 13 14 15 16 17 19 20 21 22 3769-08F; 3571-08; 3221-03; 3221-06; 3792; 3452-08F	1.38	10

9-3523MR

9-90205 GN / GN01

	Contents	kg	
9-90205GN	6011-10N; 6111-07; 6313-06	1.98	6
9-90205GN01	74410; 6463-08; 6311-06		

9-90205GN

9-90205GN01

Tool Set Content

Tray category #4 (375 x 265mm)







Drawer B2(572x275)



Drawer B3(579x380)



9-40604 GP

	Contents	kg	
9-40604GP	6116-07A, 6216-06A, 6318-08A, 6516-10A	1.53	8

9-40604GP

9-42144 GP

	Contents	kg	
9-42144GP	6011-10N, 6111-08, 6211-06, 6311-06	1.63	8

9-42144GP

9-1609 MR

	Contents	kg	
9-1609MR	1960: 8 x 9, 10 x 12, 11 x 13, 12 x 14, 14 x 17, 17 x 19, 19 x 21, 22 x 24, 23 x 26	1.93	6

9-1609MR

9-31909 PR

	Contents	kg	
9-31909PR	1427: T8x75, T9x75, T10x75, T15x75, T20x100, T25x100, T27x100, T30x125, T40x150	0.65	6

9-31909PR

9-90106 SR

	Contents	kg	
9-90106SR	76404-06, 76405-65, 76406-07, 7822-30, 7842-35, 76105-06	2.05	4

9-90106SR

Tool Set Content

Tray category #5 (265 x 185mm)

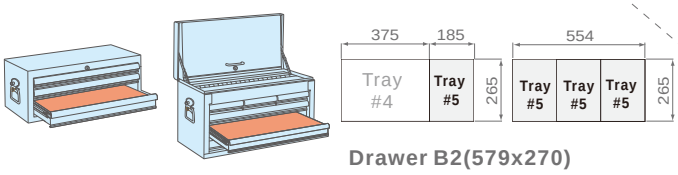

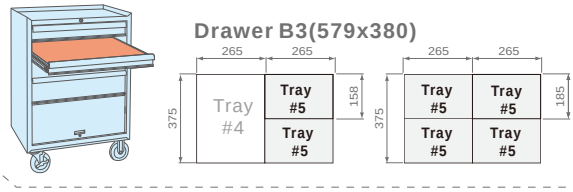

9-2526 MR

	Contents	kg	
9-2526MR	2335M 4 4.5 5 5.5 6 7 8 9 10 11 13 2235M 4 5 5.5 6 7 8 9 10 11 13 2779-55G 2813 2792 2221-02 2221-04	0.80	10

9-2526MR

9-4119 PR 9-4120 PR

	Contents	kg	
9-4119PR	4033 T20 T25 T27 T30 T40 T45 T50 T55 T60	1.10	10
9-4120PR	4035 4 5 6 7 8 10 12 14 17	1.30	10

9-4119PR

9-4120PR

9-4128 FR 9-1303 MR

	Contents	kg	
9-4128FR	1836S 9 11 1880S 8 10 1836P 2 3 1880P 2 3 4112 414810S	1.70	10
9-1303MR	1930 10 X 11 12 X 14 14 X 17	0.50	10

9-4128FR

9-1303MR

9-20110 MR 9-31106 MR

	Contents	kg	
9-20110MR	1120M 1.5 2 2.5 3 4 5 6 8 10 3204 (Ø 60 ~ 140)	1.10	10
9-31106MR	1421 NO. 0 X 60 NO. 1 X 80 NO. 2 X 100 1422 3 X 75 5.5 X 100 6.5 X 150	0.60	10

9-20110MR

9-31106MR

Tool Set Content

Tray category #5 (265 x 185mm)

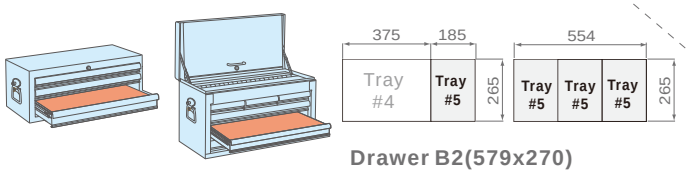

Drawer B2(579x270)

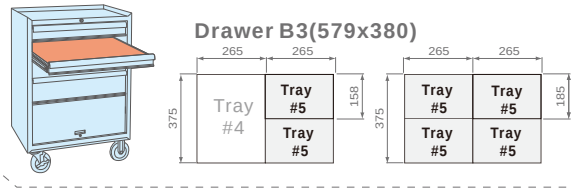

9-40103 GP

	Contents	kg	
9-40103GP	6111-07, 6211-06, 6311-06	0.81	1.0

9-40103GP

9-1905 MR

	Contents	kg	
9-1905MR	10 x 12, 11 x 13, 14 x 17, 16 x 18, 19 x 22	0.82	1 / 10

9-1905MR

9-10112 MR 9-10212 MR

	Contents	kg	
9-10112MR 3731 9-10212MR 3732	10 11 12 13 14 15 16 17 19 373202R, 373203R, 373204R	12.25	10

9-10112MR

9-10115 MR 9-10215 MR

	Contents	kg	
9-10115MR 3731 9-10215MR 3732	8 9 10 11 12 13 14 15 16 17 19 22 373202R, 373203R, 373204R	17.3	10

9-10115MR

Tool Set Content

Tray category #6 (570 x 375mm)

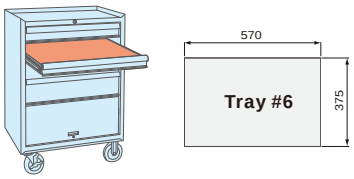

Drawer B3(579x380)

9-31919 MR

	Contents	kg	
9-31919MR	1411 NO.0x75 NO.2x38 1412 3x75 6.5x38 1421 NO.2x300 1422 6.5x300 43280212 1481 NO.2x100 NO.3x150 1482 6.5x100 8x150 1427 T8x75 T10x75 T15x75 T20x100 T25x100 T27x100 T30x125 2121-18	2.67	5

9-31919MR

9-90408 TQ

	Contents	kg	
9-90408TQ	75102-08G 75202-08G 75302-08G 79083-05C 75402-08G 75502-08G 79061-12 7911-12	2.06	5

9-90408TQ

Tool Box Set Content

- Tray size 500 x 195 mm : for 87401-2 / 87401-3 / 87401-3H 17

9-4338 MR
9-4338 MR 01
9-4338 MR 03

For top drawer only

	Contents				
9-4338MR	4335M		4021 NO.2 NO.3 4022 8 10 4023 T25 T27 T30 T40 4025 4 5 6 8 10 12	4768-10F 4755-10G	4251-05 4251-10 4572-12 463521 4791
9-4338MR01	23	10 11 12 13 14 15 16 17 18 19 20 21 22 24 27 30 32			
9-4338MR03	8				

9-4338MR

9-4338MR01

9-4338MR03

kg	
5.96	5

Tool Box Set Content

- Tray size 500 x 195 mm : for 87401-2 / 87401-3 18

9-90104GP

	Contents
9-90104GP	3611-08P, 6511-10A, 6111-07, 6311-06

kg	
1.36	5

9-90104GP

9-90121MR

	Contents
9-90121MR	1900: 6 x 7, 8 x 10, 11 x 13, 12 x 13, 17 x 19, 22 x 24 1970: 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19 1120M: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10

kg	
2.1	5

9-90121MR

9-31006MR

	Contents
9-31006MR	1421: NO. 1 X 80, NO. 2 X 38, NO. 3 X 150 1422: 6.5 X 38, 5.5 X 100, 8 X 175

kg	
0.74	5

9-31006MR

9-90126MR

	Contents
9-90126MR	1060: 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22 1120M: 1.5, 2, 2.5, 3, 4, 5, 6, 8, 10

kg	
2.38	5

9-90126MR

Tool Box Set Content

- Tray size 470 x 110 mm : For 87402 only 17

9-4319 MR
9-4319 MR 01

9-4319MR

9-4319MR01

Contents			
9-4319MR 9-4319MR01	4335M 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 27 30 32	4791	4768-10F 4755-10G

kg	
2.5	8

9-4116 FR

9-4116FR

Contents					
9-4116FR	463521	4452-18F	4251-05 4251-10	4223-02	4572-12

kg	
2.2	8

9-1217 MR

9-1217MR

Contents		
9-1217MR	1060	17 18 19 20 21 22 24

kg	
1.5	8

9-1716 MR

9-1716MR

Contents		
9-1716MR	1970	8 x 9 10 x 11 12 x 13 14 x 15 16 x 17 18 x 19

kg	
1.1	8

9-1606 MR
9-1606 MR 01

9-1606MR01

Contents		
9-1606MR	1960	10 x 12 12 x 14 14 x 17 17 x 19 19 x 21 23 x 26
9-1606MR01		8 x 10 10 x 12 12 x 14 14 x 17 17 x 19 22 x 24

kg	
1.1	8

Tool Box Set Content

9-30106 MR

	Contents	
9-30106MR	1421	NO. 1 X 80 NO. 2 X 100 NO. 3 X 150
	1422	5.5 X 100 6.5 X 150 8 X 175



kg	
1.0	8

9-30106MR

9-30206 MR

	Contents	
9-30206MR	1461	NO. 1 X 75 NO. 2 X 100 NO. 3 X 150
	1462	5.5 X 100 6.5 X 150 8 X 175

kg	
1.1	8

9-30206MR

- Tray size 470 x 110 mm : for 87402 only B29

9-40203 GP

	Contents		
9-40203GP	6111-07	6211-06	6311-06

kg	
0.8	8

9-40203GP

9-90115 MR

	Contents	
9-90115MR	1900	6x7 8x10 11x13 12x13 17x19 22x24
	1120M	1.5 2 2.5 3 4 5 6 8 10

kg	
1.2	8

9-90115MR

9-90120 MR

	Contents	
9-90120MR	1060	6 7 8 9 10 11 12 13 14 15 16
	1120M	1.5 2 2.5 3 4 5 6 8 10

kg	
1.5	8

9-90120MR

9-90125 MR

	Contents	
9-90125MR	1900	8x10 10x12 12x14 14x17 17x19 22x24
	1120M	1.5 2 2.5 3 4 5 6 8 10

kg	
1.2	8

9-90125MR

Notes

Socket & Accessory

■ Standard Socket ■ Deep Socket ■ Square Socket ■ Double Square Socket
■ Star Socket ■ Bit Socket ■ Ribe Bit Socket ■ Spark Plug Socket ■ Ratchet
■ Extension Bar ■ Extension Bar Set ■ Flexible Handle ■ Sliding Handle
■ Universal Joint ■ Speed Brace ■ Adapter ■ Socket & Wrench Set
■ Socket Rail Set ■ Socket Shelf Set

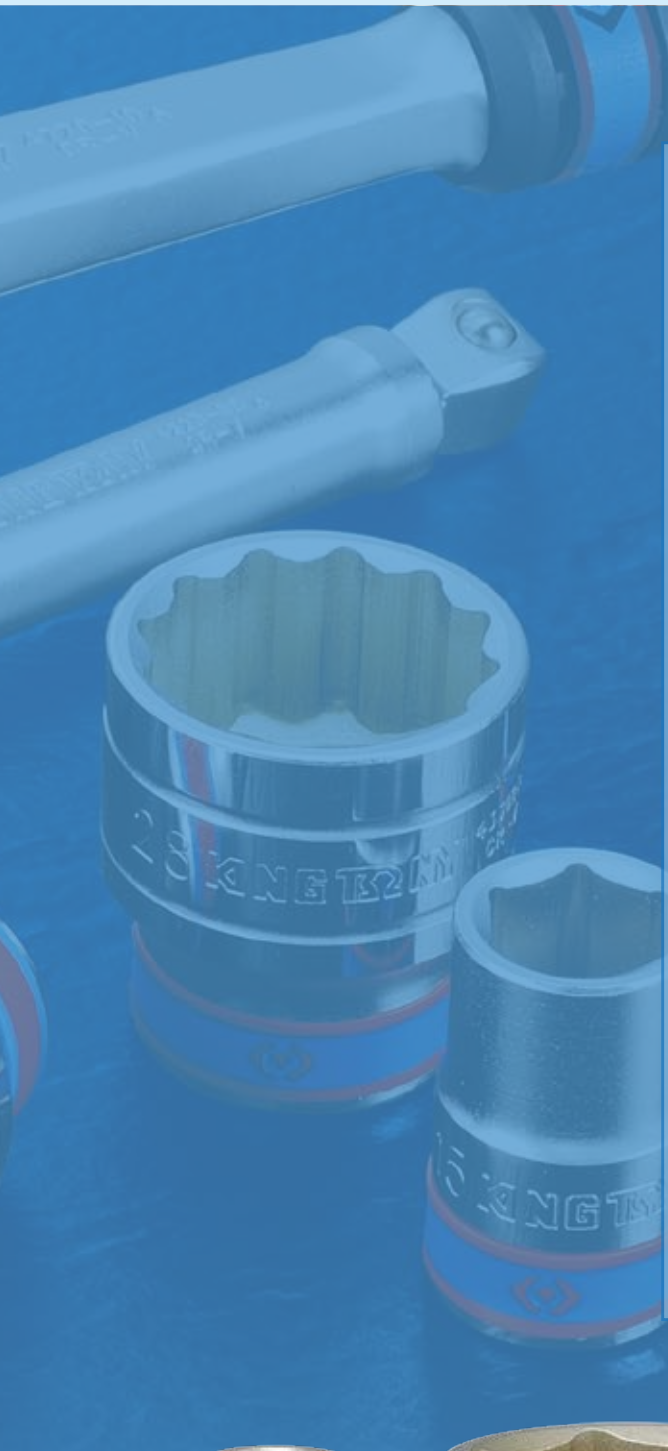

KT Socket			1/4"		3/8"		1/2"		3/4"		1"	
			mm	inch	mm	inch	mm	inch	mm	inch	mm	inch
Standard Socket	6PT		2335M	2335S	3335M	3335S	4335M	4335S	6335M			
	12PT		2330M	2330S	3330M	3330S	4330M	4330S	6330M	6330S	8330M	8330S
Deep Socket	6PT	Regular	2235M	2235S	3235M	3235S	4235M	4235S	6235M			
		Thin Wall (90L)					4245M					
		Thin Wall (120L)					4255M					
	12PT				3230M	3230S	4230M	4230S				
Star Socket			2375M		3375M		4375M					
	Long Type		2275M		3275M		4275M					
Bit Socket	Phillips		2031		3021		4021					
	Slotted		2032		3022		4022					
	Hexagon		2035		3025		4025					
	Hexagon Long Type						4035					
	12PT (Spline)	60L					4026					
		80L					4036					
		100L					404108					
		120L					402616					
	Torx		2033		3023		4023					
		80L					4033					
		Tamper Resitant Type	2037		3027		4027					
		Tamper Resitant Type(80L)					4037					
	Ribe				3039		4049					
Spark Plug Socket	6PT	Rubber			3635		4635					
		Magnet			3665		4665					
	12PT	Rubber			3630		4630					
		Magnet			3660		4660					
Square Socket							4014M					
Double Square Socket			2310M	2310S								
Bit Holder					3148		4148					

Standard Socket

- Chrome vanadium alloy steel, polished, chrome plated.
- 4 ball retaining grooves.

2335 M

- 1/4" drive
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3124 ,ISO 2725-1

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
233532M	3.2	5.7	11.8	3.5	24	9	20 / 600
233504M	4	6.8	11.8	4	24	10	20 / 600
233545M	4.5	7.4	11.8	5	24	10	20 / 600
233505M	5	8.0	11.8	6	24	11	20 / 600
233555M	5.5	8.7	11.8	6	24	11	20 / 600
233506M	6	9.2	11.8	7	24	11	20 / 600
233507M	7	10.3	11.8	7	24	11	20 / 600
233508M	8	11.4	11.8	8	24	11	20 / 600
233509M	9	12.8	12.0	8	24	15	20 / 600
233510M	10	14.3	13.0	9	24	14	12 / 360
233511M	11	15.8	14.2	9	24	20	12 / 360
233512M	12	16.8	15.5	9	24	22	12 / 360
233513M	13	17.8	16.5	9	24	24	12 / 360
233514M	14	19.6	18.5	9	24	30	10 / 300



2335 S

- 1/4" drive
- 6 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.1

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
233505S	5/32	6.8	11.8	4	24	10	20 / 600
233506S	3/16	7.9	11.8	6	24	10	20 / 600
233507S	7/32	8.7	11.8	6	24	11	20 / 600
233508S	1/4	9.5	11.8	7	24	11	20 / 600
233509S	9/32	10.3	11.8	7	24	11	20 / 600
233510S	5/16	11.4	11.8	8	24	11	20 / 600
233511S	11/32	13.7	12.2	8	24	13	20 / 600
233512S	3/8	14.2	13.0	8	24	14	12 / 360
233514S	7/16	15.8	14.2	9	24	19	12 / 360
233515S	15/32	16.8	15.5	9	24	22	12 / 360
233516S	1/2	17.6	16.5	9	24	24	12 / 360

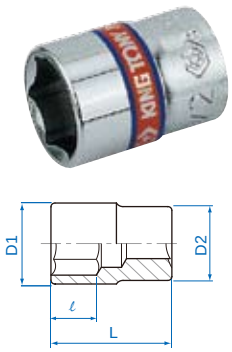

2330 M

- 1/4" drive
- 12 points
- Metric size
- Thin walled design on square driving side
- DIN 3124 ,ISO 2725-1

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
233004M	4	6.8	11.8	4	24	10	20 / 600
233045M	4.5	7.4	11.8	5	24	10	20 / 600
233005M	5	8.0	11.8	6	24	11	20 / 600
233055M	5.5	8.7	11.8	6	24	11	20 / 600
233006M	6	9.2	11.8	7	24	11	20 / 600
233007M	7	10.3	11.8	7	24	11	20 / 600
233008M	8	11.4	11.8	8	24	11	20 / 600
233009M	9	12.8	12.0	8	24	15	20 / 600
233010M	10	14.3	13.0	9	24	14	12 / 360
233011M	11	15.8	14.2	9	24	20	12 / 360
233012M	12	16.8	15.5	9	24	22	12 / 360
233013M	13	17.8	16.5	9	24	24	12 / 360
233014M	14	19.6	18.5	9	24	30	10 / 300

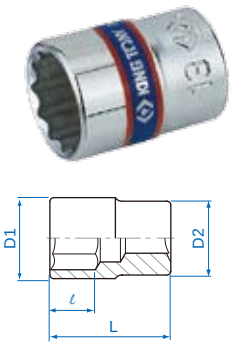

2330 S

- 1/4" drive
- 12 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.1

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
233005S	5/32	6.8	11.8	4	24	10	20 / 600
233006S	3/16	7.9	11.8	6	24	10	20 / 600
233007S	7/32	8.7	11.8	6	24	11	20 / 600
233008S	1/4	9.5	11.8	7	24	11	20 / 600
233009S	9/32	10.3	11.8	7	24	11	20 / 600
233010S	5/16	11.4	11.8	8	24	11	20 / 600
233011S	11/32	13.7	12.2	8	24	13	20 / 600
233012S	3/8	14.2	13.0	8	24	14	12 / 360
233014S	7/16	15.8	14.2	9	24	19	12 / 360
233015S	15/32	16.8	15.5	9	24	22	12 / 360
233016S	1/2	17.6	16.5	9	24	24	12 / 360

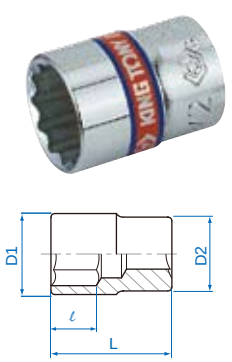

Deep Socket

2235 M

- 1/4" drive
- 6 points
- Metric size
- DIN 3124 ,ISO 2725-1

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
223504M	4	6.8	11.8	6	50	20	30 / 480
223545M	4.5	7.4	11.8	7	50	21	30 / 480
223505M	5	8.0	11.8	7	50	21	30 / 480
223555M	5.5	8.7	11.8	9	50	21	30 / 480
223506M	6	9.2	11.8	9	50	23	30 / 480
223507M	7	10.3	11.8	15	50	23	30 / 480
223508M	8	11.8	11.8	15	50	24	30 / 480
223509M	9	13.0	13.0	15	50	29	16 / 256
223510M	10	14.5	14.5	15	50	38	16 / 256
223511M	11	15.8	15.8	21	50	44	14 / 224
223512M	12	16.8	16.8	21	50	53	14 / 224
223513M	13	17.8	17.8	21	50	51	16 / 320
223514M	14	19.8	19.8	21	50	68	14 / 280



2235 S

- 1/4" drive
- 6 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.1

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
223505S	5/32	6.8	11.8	6	50	24	30 / 480
223506S	3/16	7.9	11.8	7	50	24	30 / 480
223507S	7/32	8.7	11.8	9	50	25	30 / 480
223508S	1/4	9.5	11.8	9	50	25	30 / 480
223509S	9/32	10.3	11.8	15	50	25	30 / 480
223510S	5/16	11.8	11.8	15	50	24	30 / 480
223511S	11/32	13.0	13.0	15	50	31	16 / 256
223512S	3/8	14.5	14.5	15	50	34	16 / 256
223514S	7/16	15.8	15.8	21	50	46	14 / 224
223516S	1/2	17.6	17.6	21	50	56	16 / 320



Double Square Socket

2310 M

- 1/4" drive
- 8 points
- Metric size
- Thin walled design on square driving side
- DIN 3120

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
231008M	8	14.3	13.0	9	24	14	12 / 360
231010M	10	17.6	16.5	9	24	14	12 / 360



2310 S

- 1/4" drive
- 8 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.1

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
231010S	5 / 16	14.3	13.0	9	24	14	12 / 360
231012S	3 / 8	17.6	16.5	9	24	14	12 / 360



Star Socket

2375 M

- 1/4" drive star socket
- For torx external screws
- Chrome vanadium steel Polished, chrome plated
- DIN 3120

KING TONY	SIZE	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
237504M	E4	6.0	11.8	3.6	24	15	20 / 360
237505M	E5	7.0	11.8	4.0	24	16	20 / 360
237506M	E6	8.0	11.8	6.0	24	16	20 / 360
237507M	E7	8.5	11.8	7.0	24	17	20 / 360
237508M	E8	9.8	11.8	8.0	24	20	20 / 360



2275 M

- 1/4" drive star socket
- Long type

KING TONY	SIZE	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
227504M	E4	6.0	11.8	3.6	50	22	30 / 480
227505M	E5	7.0	11.8	4.0	50	22	30 / 480
227506M	E6	8.0	11.8	6.0	50	23	30 / 480
227507M	E7	8.5	11.8	7.0	50	24	30 / 480
227508M	E8	9.8	11.8	8.0	50	26	30 / 480



Bit Socket

- Socket made from chrome vanadium alloy steel
- Bit made from silicon alloy steel (S2)
- Polished, chrome plated.

CAUTION

In order to get normal life of bit socket, Always use within limited torque to bits.

2031

- 1/4" drive bit socket
- Phillips head
- DIN ISO 8764-1

KING TONY	No.	Overall Length (mm)	g	
203101	1	37	14	20 / 600
203102	2	37	14	20 / 600
203103	3	37	15	20 / 600
203104	4	37	16	20 / 600

2032

- 1/4" drive bit socket
- Slotted head
- DIN ISO 8764-1

KING TONY	Tip Width (mm)	Tip thickness (mm)	Overall Length (mm)	g	
203235	3.5	0.5	37	14	20 / 600
203204	4	0.8	37	14	20 / 600
203255	5.5	1.0	37	15	20 / 600
203265	6.5	1.2	37	15	20 / 600
203208	8	1.2	37	16	20 / 600
203210	10	1.6	37	17	20 / 600

2033

- 1/4" drive bit socket
- For Torx internal screws
- DIN 3120

KING TONY	SIZE	Overall Length (mm)	g	
203308	T8	37	12	20 / 600
203309	T9	37	12	20 / 600
203310	T10	37	13	20 / 600
203315	T15	37	14	20 / 600
203320	T20	37	14	20 / 600
203325	T25	37	14	20 / 600
203327	T27	37	14	20 / 600
203330	T30	37	15	20 / 600
203340	T40	37	16	20 / 600

2035

- 1/4" drive bit socket
- Hexagon head
- DIN 7422/3120

KING TONY	mm	Overall Length (mm)	g	
203503	3	37	13	20 / 600
203504	4	37	15	20 / 600
203505	5	37	15	20 / 600
203506	6	37	15	20 / 600
203507	7	37	16	20 / 600
203508	8	37	17	20 / 600
203510	10	37	21	20 / 600

2037

- 1/4" drive bit socket
- For tamper resistant torx screws
- DIN 3120

KING TONY	SIZE	Overall Length (mm)	g	
203708	T8	37	12	20 / 600
203709	T9	37	12	20 / 600
203710	T10	37	13	20 / 600
203715	T15	37	14	20 / 600
203720	T20	37	14	20 / 600
203725	T25	37	14	20 / 600
203727	T27	37	14	20 / 600
203730	T30	37	15	20 / 600
203740	T40	37	16	20 / 600

Ratchet

- MATERIAL
  - handle of chrome vanadium alloy steel
  - (gear) driver of chrome molybdenum steel
- FINISHING
  - polished, chrome plated
  - black driver by phosphate sunk

2755 DIN 3122

- 1/4" drive reversible ratchet
- 5° gear action degree (72 teeth)

KING TONY	Overall (inch)	Length (mm)	g	/
2755-55G	5-1/2	140	120.0	5 / 90
2755DK	renewal kits		-	-

2755-55G

2755DK

8781007KT

2760 DIN 3122

- 1/4" drive mini reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action

KING TONY	Overall (inch)	Length (mm)	g	/
2760-04	4	100	73.4	8 / 128
2760DK	renewal kits		-	-

2760-04

2760DK

8781007KT

2761 DIN 3122

- 1/4" drive reversible ratchet quick-release
- 15° gear action degree (24 teeth)
- Two teeth pawl action

KING TONY	Overall (inch)	Length (mm)	g	/
2761-55F	5-1/2	140	169.0	6 / 108
2761-55P	5-1/2	140	158.0	6 / 108
2761DK	renewal kits		-	-

2761-55F

2761-55P


2761DK

8781007KT

2769 DIN 3122

- 1/4" drive reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action

KING TONY	Overall (inch)	Length (mm)	g	/
2769-55F	5-1/2	140	126.0	6 / 108
2769-55P	5-1/2	140	125.0	6 / 108
2769DK	renewal kits		-	-

2769-55F

2769-55P


2769DK

8781007KT

Ratchet

- MATERIAL
  - handle of chrome vanadium alloy steel
  - (gear) driver of chrome molybdenum steel
- FINISHING
  - polished, chrome plated
  - black driver by phosphate sunk

2771 DIN 3122

- 1/4" drive reversible ratchet quick-release
- 15° gear action degree (24 teeth)
- Two teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
2771-55F	5-1/8	130	140	6 / 108
2771-55G	5-1/8	130	122	6 / 108
2771DK	renewal kits		-	-

2771-55F

2771-55G


2771DK

8781007KT

2779 DIN 3122

- 1/4" drive reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
2779-55F	5 - 1/8	130	146	6 / 108
2779-55G	5 - 1/8	130	126	6 / 108
2779DK	renewal kits		-	-

2779-55F

2779-55G


2779DK

8781007KT

2781 DIN 3122

- 1/4" drive reversible ratchet quick-release
- 15° gear action degree (24 teeth)
- Two teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
2781-06F	6	150	155	6 / 108
2781-06P	6	150	148	6 / 108
2781DK	renewal kits		-	-

2781-06F

2781-06P

2781DK

8781007KT

2789 DIN 3122

- 1/4" drive reversible ratchet
- 15° gear action degree (24 teeth)
- Two teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
2789-06F	6	150	140	6 / 108
2789-06P	6	150	140	6 / 108
2789DK	renewal kits		-	-

2789-06F

2789-06P


2789DK

8781007KT

Accessory

- MATERIAL - chrome vanadium alloy steel
- FINISHING - polished, chrome plated

2221 DIN 3123

- 1/4" drive extension bar

KING TONY	Total (inch)	Length (mm)	g	
2221-02	2	55	24	30 / 480
2221-03	3	75	37	20 / 400
2221-04	4	100	45	15 / 240
2221-06	6	150	67	15 / 300
2221-10	10	254	108	15 / 240
2221-12	12	305	130	15 / 240

2221

8772KT

2223 DIN 3123

- 1/4" drive offset extension bar
- Max. torque 35 Nm

KING TONY	Total (inch)	Length (mm)	g	
2223-02	2	55	23	30 / 480
2223-04	4	100	45	15 / 240

2223

8772KT

2293 DIN 3123

- 1/4" drive munti-function of extention bar and offset extension bar.
- Hex key is applicable to the hex shank.

KING TONY	Total (inch)	Length (mm)	g	
2293-02	2	55	25	30 / 480
2293-04	4	100	45	15 / 240
2293-06	6	150	140	15 / 300

2293

1.offset extension bar
or
2.extension bar

8772KT

2311

- 1/4" drive flexible extension bar

KING TONY	Total (inch)	Length (mm)	g	
2311-06	6	150	68	12 / 240
2311-12	12	300	92	12 / 120
2311-18	18	450	120	20 / 200

2311

8772KT

2792 DIN 3123

- 1/4" drive universal joint

KING TONY	Total (inch)	Length (mm)	g	
2792	1 - 1/2	36	29	24 / 384

2792

8772KT

2813 DIN 3123

- 1/4" drive adapter
- Convertimg to 3/8" drive

KING TONY	Spec.	g	
2813	1/4" F x 3/8"M	20	12 / 360

3/8" drive (M) 1/4" drive (F)

8772KT

Accessory

- MATERIAL - chrome vanadium alloy steel
- FINISHING - polished, chrome plated & black phosphate sunk

2133DF

- 1/4" drive screwdriver driver

KING TONY	Total (inch)	Length (mm)	g	
213312DF	12	300	132	2 / 40

213312DF

8781007KT

2177DF

- 1/4" drive spinner handle

KING TONY	Total (inch)	Length (mm)	g	
2177DF	12 - 1/4	310	126	2 / 40

2177DF

8781007KT

2178AE
2178DF

- 1/4" drive driving handle

KING TONY	Total (inch)	Length (mm)	g	
2178AE	6	150	76	6 / 120
2178DF	6	150	71	6 / 120

2178AE (Polycarbonates)

2178DF (PP + TPR)

8781007KT

2452 DIN 3122

- 1/4" drive flexible handle
- Action degree -180°

KING TONY	Total (inch)	Length (mm)	g	
2452-05F	5	130	88	15 / 270
2452DK	renewal kits		-	-

2452-05F

2452DK

8781007KT

2571 DIN 3122

- 1/4" drive sliding T-handle

KING TONY	Total (inch)	Length (mm)	g	
2571-45	4-1/2	115	41	12 / 192

2571-45

8781007KT

Socket Set

2510 SR (10 PC.)
2511 MR (11 PC.)

- 1/4" drive socket set

2510SR

2511MR

	Contents
2510SR	○ 2235S: 5/32 3/16 7/32 1/4 9/32 5/16 11/32 3/8 7/16 1/2
2511MR	○ 2235M: 4 5 5.5 6 7 8 9 10 11 12 13

	kg		Metal case size (mm)
2510SR	0.62	30	223 x 65 x 32 (0.016 cuft)
2511MR	0.67		

2516 MR SR

- 16 PC. 1/4" drive socket wrench set

2516MR

2516SR

	Contents		
2516MR	○ 2335M: 4 4.5 5 5.5 6 7 8 9 10 11 13	2779-55G, 2178AE, 2571-45	2221-04, 2792
2516SR	○ 2335S: 5/32 3/16 7/32 1/4 9/32 5/16 11/32 3/8 7/16 15/32 1/2		

kg		Metal case size (mm)
1.10	18	244 x 118 x 37 (0.038 cuft)

2519 MR SR
2019 MR SR

- 18 PC. 1/4" drive socket wrench set

	Contents		
2519MR	○ 2335M: 4 4.5 5 6 7 8 9 10 11 12	○ 2310M: 8 10	2769-55P, 2452-05F, 2221-02, 2221-04, 2571-45, 2792
2019MR	○ 2330M: 4 4.5 5 6 7 8 9 10 11 12		
2519SR	○ 2335S: 5/32 3/16 7/32 1/4 9/32 5/16 11/32 3/8 7/16 1/2	○ 2310S: 5/16 3/8	
2019SR	○ 2330S: 5/32 3/16 7/32 1/4 9/32 5/16 11/32 3/8 7/16 1/2		

kg		Metal case size (mm)
0.92	20	198 x 105 x 32 (0.023 cuft)

2521 MR
2021 MR

- 19 PC. 1/4" drive socket wrench set

	Contents		
2521MR	○ 2335M: 4 4.5 5 5.5 6 7 8 9 10 11 12 13	2779-55G	2452-05F, 2571-45, 2221-02, 2221-04, 2792, 2141
2021MR	○ 2330M: 4 4.5 5 5.5 6 7 8 9 10 11 12 13		

kg		Metal case size (mm)
0.87	20	198 x 105 x 32 (0.023 cuft)

Socket Set

2526 MR SR

- 26 PC. 1/4" drive socket wrench set

Contents		
2526MR	2335M: 4 4.5 5 5.5 6 7 / 8 9 10 11 13	2779-55G, 2792, 2221-02, 2221-04, 2813
	2235M: 4 5 5.5 6 7 / 8 9 10 11 13	
2526SR	2335S: 5/32 3/16 7/32 1/4 / 9/32 5/16 11/32 3/8 / 7/16 15/32 1/2	
	2235S: 5/32 3/16 7/32 1/4 / 9/32 5/16 11/32 3/8 / 7/16 1/2	

2526MR

2526SR

kg		Metal case size (mm)
1.30	18	244 x 118 x 37 (0.038 cuft)

2530 CR
2030 CR

- 30 PC. 1/4" drive socket wrench set

Contents		
2530CR	2335M: 4 4.5 5 6 7 / 8 9 10 11 12	2310M: 8 10; 2310S: 5/16 3/8; 2769-55F, 2571-45, 2452-05F, 2221-02, 2221-04, 2792
	2335S: 5/32 3/16 7/32 1/4 / 9/32 5/16 11/32 3/8 / 7/16 1/2	
2030CR	2330M: 4 4.5 5 6 7 / 8 9 10 11 12	
	2330S: 5/32 3/16 7/32 1/4 / 9/32 5/16 11/32 3/8 / 7/16 1/2	

kg		Metal case size (mm)
1.30	18	244 x 118 x 37 (0.038 cuft)

2531 MR
2031 MR

- 31 PC. 1/4" drive socket wrench set

Contents		
2531MR	2335M: 4 4.5 5 6 / 7 8 9 10 / 11 12 13	2033: T8 T9 T10 T15 / T20 T25 T27 T30; 2035: 3 4 5 6 8 10; 2779-55G, 2221-03, 2221-06, 2178AE, 2571-45, 2792
2031MR	2330M: 4 4.5 5 6 / 7 8 9 10 / 11 12 13	

kg		Metal case size (mm)
1.60	15	280 x 130 x 41 (0.053 cuft)

Socket Set

2539 MR

- 39 PC. 1/4" drive socket wrench set

	Contents	
2539MR	2335M: 4 4.5 5 5.5 6 7 8 9 10 11 12 13	2779-55G, 2178AE, 2571-45, 2792, 2221-02, 2221-04
	2033: T8 T9 T10 T15 T20 T25 T27 T30 T40	
	2035: 3 4 5 6 7 8 10	
	2375: E4 E5 E6 E7 E8	

kg		Metal case size (mm)
1.52	15	280 x 130 x 41 (0.053 cuft)

2540 MR

- 39 PC.1/4" drive socket wrench set

	Contents	
2540MR	2335M: 4 4.5 5 5.5 6 7 8 9 10 11 12 13	2779-55G, 2452-05F, 2571-45, 2133DF, 2221-02, 2221-06, 2792, 2141
	1025S: 4 5.5 7	
	1025P: 0 1 2 3	
	1025H: 3 4 5 6 7 8	
	1025T: T10 T15 T20 T25 T30 T40	

kg		Metal case size (mm)
1.36	12	316 x 104 x 40 (0.047 cuft)

2526 CR

- 26 PC. 1/4" drive socket wrench set

	Contents	
2526CR	2335M: 4 4.5 5 5.5 6 7 8 9 10 11 12 13 14	2779-55G, 2452-05F, 2571-45, 2221-02, 2221-04, 2792
	2335S: 1/4 3/8 1/2	
	2033: T20 T25 T30 T40	

kg		Metal case size (mm)
0.68	10	280 x 130 x 41 (0.053 cuft)

Socket Set

2575 MR

- 45 PC. 1/4" drive socket wrench set

Contents			
2575MR	2335M: 4 5 5.5 6 7 8 9 10 11 12 13 14	2755-55G	2311
	1025S: 4.0 6.5 7.0 8.0	2178AE	2792
	1025P: 1 2 3	2223	2142
	1025H: 2.5 3 4 5 6 7 8 10		
	1025U: T8 T9 T10 T15 T20 T25 T27 T30 T40		
	1025Z: PZ1 PZ2 PZ3		

kg		Metal case size (mm)
1.24	1 / 18	244 x 118 x 37

2551 MR NEW

- 51 PC. 1/4" drive socket wrench set

Contents			
2551MR	2335M: 4 5 5.5 6 7 8 9 10 11 12 13 14	2755-55G	2792
	1025S: 3.0 4.0 5.0 6.0	2178DF	7702-25
	1025P: PH1 PH2 x 2 PH3	2223-02 2223-04	753-63
	1025Z: PZ1 PZ2 x 2 PZ3	2142	2813
	1025T: T10 T15 T20 T25 T27 T30 T40		
	1025H: H3 H4 H5 H6		
	1025U: T10 T15 T20 T25 T27 T30 T40		

kg		Metal case size (mm)
1.3	1 / 18	244 x 118 x 37

Socket Rail

872

- 1/4" drive socket rail
- Rail length from 160 mm to 560 mm

KING TONY		CLIP	L (mm)	g	
870406		-	160	-	-
870208		-	200	-	-
870422		-	560	-	-
8720		-	-	-	-

Customer Selected

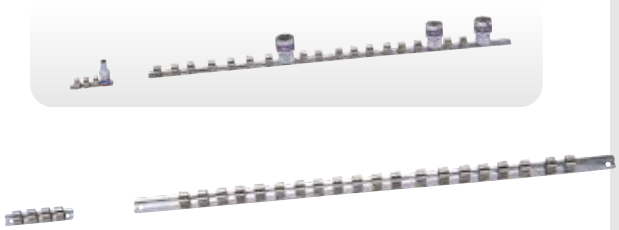

Socket Rail Set

2509 MR SR

- 9 PC. 1/4" drive socket set
- Socket rail 150mm L
  - Rail with 9 PC. 1/4" drive clips

	Contents	
2509MR	2335M: 4 5 6 7 8 9 10 11 13	8720609
2509SR	2335S: 5/32 3/16 1/4 9/32 5/16 11/32 3/8 7/16 1/2	

kg		
0.20	50	

2127 PR

- 7 PC. 1/4" drive bit socket set
  - Socket rail 130 mm L
  - Rail with 7 PC. 1/4" drive clip

	Contents	
2127PR	2035: H3 H4 H5 H6 H7 H8 H10	8720507

kg		
0.15	50	

Standard Socket

- Chrome vanadium alloy steel, polished, chrome plated.
- 4 ball retaining grooves.

3330 M

- 3/8" drive
- 12 points
- Metric size
- Thin walled design on square driving side
- DIN 3124 ,ISO 2725-1

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
333006M	6	9.9	17.8	7.0	27	24	12 / 360
333007M	7	10.8	17.8	7.0	27	24	12 / 360
333008M	8	12.0	17.8	7.0	27	25	12 / 360
333009M	9	13.2	17.8	7.0	27	25	12 / 360
333010M	10	14.5	17.8	9.0	27	26	12 / 360
333011M	11	15.8	17.8	9.0	27	27	12 / 360
333012M	12	16.8	17.8	9.0	27	27	12 / 360
333013M	13	17.8	16.8	9.0	27	30	12 / 360
333014M	14	19.7	18.0	11.0	29	33	10 / 300
333015M	15	20.8	18.0	11.0	29	40	10 / 300
333016M	16	21.8	20.0	11.0	29	39	10 / 300
333017M	17	23.8	20.0	11.0	29	52	10 / 200
333018M	18	24.7	21.0	13.0	29	58	10 / 200
333019M	19	25.8	21.0	13.0	29	62	10 / 200
333020M	20	27.1	25.0	13.0	32	73	10 / 160
333021M	21	27.8	25.0	13.0	32	82	10 / 160
333022M	22	29.7	26.0	15.0	32	87	10 / 160
333024M	24	31.8	26.0	17.0	32	78	8 / 160



3330 S

- 3/8" drive
- 12 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.1

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
333008S	1/4	10.0	17.8	7.0	27	25	12 / 360
333010S	5/16	12.0	17.8	7.0	27	22	12 / 360
333011S	11/32	13.2	17.8	7.0	27	25	12 / 360
333012S	3/8	14.0	17.8	9.0	27	26	12 / 360
333014S	7/16	15.8	17.8	9.0	27	27	12 / 360
333015S	15/32	16.8	17.8	9.0	27	25	12 / 360
333016S	1/2	17.8	16.8	9.0	27	30	12 / 360
333018S	9/16	19.7	18.0	11.0	29	33	10 / 300
333019S	19/32	20.8	18.0	11.0	29	41	10 / 300
333020S	5/8	21.8	20.0	11.0	29	43	10 / 300
333022S	11/16	23.8	20.0	11.0	29	52	10 / 200
333024S	3/4	25.7	21.0	13.0	29	62	10 / 200
333026S	13/16	27.8	25.0	13.0	32	77	10 / 160
333028S	7/8	29.6	26.0	15.0	32	87	10 / 160



3335 M

- 3/8" drive
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3124 ,ISO 2725-1

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
333506M	6	9.9	17.8	7.0	27	25	12 / 360
333507M	7	10.8	17.8	7.0	27	24	12 / 360
333508M	8	12.0	17.8	7.0	27	25	12 / 360
333509M	9	13.2	17.8	7.0	27	25	12 / 360
333510M	10	14.5	17.8	9.0	27	27	12 / 360
333511M	11	15.8	17.8	9.0	27	28	12 / 360
333512M	12	16.8	17.8	9.0	27	28	12 / 360
333513M	13	17.8	16.8	9.0	27	31	12 / 360
333514M	14	19.7	18.0	11.0	29	34	10 / 300
333515M	15	20.8	18.0	11.0	29	47	10 / 300
333516M	16	21.8	20.0	11.0	29	45	10 / 300
333517M	17	23.8	20.0	11.0	29	53	10 / 200
333518M	18	24.7	21.0	13.0	29	58	10 / 200
333519M	19	25.8	21.0	13.0	29	64	10 / 200
333520M	20	27.1	25.0	13.0	32	73	10 / 160
333521M	21	27.8	25.0	13.0	32	82	10 / 160
333522M	22	29.7	26.0	15.0	32	87	10 / 160
333523M	23	29.7	26.0	15.0	32	80	10 / 160
333524M	24	31.8	26.0	17.0	32	78	8 / 160



Standard Socket

- Chrome vanadium alloy steel, polished, chrome plated.
- 4 ball retaining grooves.

3335 S

- 3/8" drive
- 6 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.1

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
333508S	1/4	10.0	17.8	7.0	27	25	12 / 360
333510S	5/16	12.0	17.8	7.0	27	22	12 / 360
333511S	11/32	13.2	17.8	7.0	27	25	12 / 360
333512S	3/8	14.0	17.8	9.0	27	26	12 / 360
333514S	7/16	15.8	17.8	9.0	27	27	12 / 360
333515S	15/32	16.8	17.8	9.0	27	25	12 / 360
333516S	1/2	17.8	16.8	9.0	27	30	12 / 360
333518S	9/16	19.7	18.0	11.0	29	33	10 / 300
333519S	19/32	20.8	18.0	11.0	29	41	10 / 300
333520S	5/8	21.8	20.0	11.0	29	43	10 / 300
333522S	11/16	23.8	20.0	11.0	29	52	10 / 200
333524S	3/4	25.7	21.0	13.0	29	62	10 / 200
333526S	13/16	27.8	25.0	13.0	32	77	10 / 160
333528S	7/8	29.6	26.0	15.0	32	87	10 / 160
333530S	15/16	31.8	26.0	17.0	34	80	8 / 160
333532S	1	33.8	26.0	17.0	34	100	8 / 160



Deep Socket

- Chrome vanadium alloy steel, polished, chrome plated.
- 4 ball retaining grooves.

3230 M

- 3/8" drive
- 12 points
- Metric size
- Thin walled design on square driving side
- DIN 3124 ,ISO 2725-1

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
323007M	7	10.8	17.8	10.0	63	54	20 / 320
323008M	8	12.0	17.8	12.0	63	54	18 / 288
323009M	9	13.2	17.8	12.0	63	59	18 / 288
323010M	10	14.5	17.8	12.0	63	56	15 / 240
323011M	11	15.8	17.8	15.0	63	63	15 / 240
323012M	12	16.8	17.8	15.0	63	58	15 / 240
323013M	13	17.8	16.8	15.0	63	61	15 / 240
323014M	14	19.7	18.0	16.0	63	71	12 / 192
323015M	15	20.8	18.0	18.0	63	92	10 / 160
323016M	16	21.8	20.0	18.0	63	88	8 / 128
323017M	17	23.8	20.0	18.0	63	97	8 / 128
323018M	18	24.7	21.0	20.0	63	136	6 / 96
323019M	19	25.8	21.0	20.0	63	110	6 / 96
323021M	21	27.8	25.0	20.0	63	127	6 / 96
323022M	22	29.7	26.0	20.0	63	164	6 / 96
323024M	24	31.8	26.0	25.0	63	182	3 / 48



3230 S

- 3/8" drive
- 12 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.1

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
323010S	5/16	12.0	17.8	12.0	63	52	18 / 288
323012S	3/8	14.0	17.8	12.0	63	60	15 / 240
323014S	7/16	15.8	17.8	15.0	63	68	15 / 240
323016S	1/2	17.8	16.8	15.0	63	68	15 / 240
323018S	9/16	19.7	18.0	16.0	63	72	12 / 192
323020S	5/8	21.8	20.0	18.0	63	88	8 / 128
323022S	11/16	23.8	20.0	18.0	63	112	8 / 128
323024S	3/4	25.8	21.0	20.0	63	126	6 / 96
323026S	13/16	27.8	25.0	20.0	63	126	6 / 96



Deep Socket

- Chrome vanadium alloy steel, polished, chrome plated.
- 4 ball retaining grooves.

3235 M

- 3/8" drive
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3124 ,ISO 2725-1

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
323507M	7	10.8	17.8	10.0	63	52	20 / 320
323508M	8	12.0	17.8	12.0	63	52	18 / 288
323509M	9	13.2	17.8	12.0	63	56	18 / 288
323510M	10	14.5	17.8	12.0	63	60	15 / 240
323511M	11	15.8	17.8	15.0	63	68	15 / 240
323512M	12	16.8	17.8	15.0	63	68	15 / 240
323513M	13	17.8	16.8	15.0	63	64	15 / 240
323514M	14	19.7	18.0	16.0	63	72	12 / 192
323515M	15	20.8	18.0	18.0	63	88	10 / 160
323516M	16	21.8	19.0	18.0	63	88	8 / 128
323517M	17	23.8	20.0	18.0	63	112	8 / 128
323518M	18	24.7	21.0	20.0	63	126	6 / 96
323519M	19	25.8	21.0	20.0	63	124	6 / 96
323521M	21	27.8	25.0	20.0	63	126	6 / 96
323522M	22	29.7	26.0	20.0	63	128	6 / 96
323524M	24	31.8	26.0	25.0	63	155	3 / 48



3235 S

- 3/8" drive
- 6 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.1

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
323510S	5/16	12.0	17.8	12.0	63	52	18 / 288
323512S	3/8	14.0	17.8	12.0	63	60	15 / 240
323514S	7/16	15.8	17.8	15.0	63	68	15 / 240
323516S	1/2	17.8	16.8	15.0	63	68	15 / 240
323518S	9/16	19.7	18.0	16.0	63	72	12 / 192
323520S	5/8	21.8	20.0	18.0	63	88	8 / 128
323522S	11/16	23.8	20.0	18.0	63	112	8 / 128
323524S	3/4	25.8	21.0	20.0	63	126	6 / 96
323526S	13/16	27.8	25.0	20.0	63	126	6 / 96



Star Socket

3375 M

- 3/8" drive star socket
- For torx external screws
- Chrome vanadium steel
- Polished, chrome plated
- DIN 3120

KING TONY	SIZE	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
337504M	E4	6.0	16.8	3.6	28	18	12 / 360
337505M	E5	7.0	16.8	4.0	28	19	12 / 360
337506M	E6	8.0	16.8	5.0	28	20	12 / 360
337507M	E7	8.9	16.8	6.0	28	21	12 / 360
337508M	E8	10.0	16.8	6.5	28	21	12 / 360
337510M	E10	12.0	16.8	7.0	28	22	12 / 360
337511M	E11	12.8	16.8	8.0	28	23	12 / 360
337512M	E12	14.3	16.8	9.0	28	25	12 / 360
337514M	E14	15.9	17.8	9.5	28	29	12 / 360
337516M	E16	18.0	19.8	10.5	28	39	10 / 300
337518M	E18	20.0	21.8	11.0	28	50	10 / 300



3275 M

- 3/8" drive star socket
- Long type

KING TONY	SIZE	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
327504M	E4	6.0	16.8	3.6	63	46	20 / 400
327505M	E5	7.0	16.8	4.0	63	48	20 / 400
327506M	E6	8.0	16.8	5.0	63	49	20 / 400
327507M	E7	8.9	16.8	6.0	63	51	20 / 320
327508M	E8	10.0	16.8	6.5	63	53	20 / 320
327510M	E10	12.0	16.8	7.0	63	57	18 / 288
327511M	E11	12.8	16.8	8.0	63	59	18 / 288
327512M	E12	14.3	16.8	9.0	63	62	18 / 288
327514M	E14	15.9	16.8	9.5	63	68	15 / 240
327516M	E16	17.8	17.8	10.5	63	85	15 / 240
327518M	E18	19.8	19.8	11.0	63	90	10 / 160



Spark Plug Socket

- Chrome vanadium alloy steel, polished, chrome plated.
- 4 ball retaining grooves.

○ 3630 ○ 3635
○ 3660 ○ 3665

- 3/8" drive spark plug socket
- 6 / 12 points
- Size combined
  - 16.0mm (5/8")
  - 20.8mm (13/16")
- Inside sleeve
  - rubber
  - magnet
- DIN 3120

Magnet

363516

366516

363521

366521

363016

366016

363021

366021





KING TONY	TYPE	SIZE (mm)	(inch)	D (mm)	L (mm)	g	
363516	6 points Rubber	16.0	(5/8")	21	70	100	10 / 200
366516	6 points Magnet	16.0	(5/8")	21	70	105	10 / 200
363521	6 points Rubber	20.8	(13/16")	27.7	70	145	12 / 120
366521	6 points Magnet	20.8	(13/16")	27.7	70	150	12 / 120
363016	12 points Rubber	16.0	(5/8")	21	70	100	10 / 200
366016	12 points Magnet	16.0	(5/8")	21	70	105	10 / 200
363021	12 points Rubber	20.8	(13/16")	27.7	70	150	12 / 120
366021	12 points Magnet	20.8	(13/16")	27.7	70	155	12 / 120

○ 36A0 ○ 36A5

- 3/8" drive spark plug socket
- 6 / 12 points
- Size combined - 14.0mm , 18.0mm ***(for motor use only)***
- Inside sleeve - spring
- DIN 3120



Spring

36A5

36A0





KING TONY	TYPE	SIZE (mm)	D (mm)	L (mm)	g	
36A514	6 points	14.0	18.9	63	69.4	12 / 192
36A518	6 points	18.0	23.8	63	98.2	8 / 128
36A014	12 points	14.0	18.9	63	65.4	12 / 192
36A018	12 points	18.0	23.8	63	98.0	8 / 128

Universal Socket

- Chrome vanadium alloy steel, polished, chrome plated.
- 4 ball retaining grooves.

3750 M

- 3/8" drive
- 12 points
- Metric size

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
375010M	10	14.5	18.8	9.0	48.0	59	15 / 240
375011M	11	15.8	18.8	10.0	48.0	57	15 / 240
375012M	12	17.0	18.8	10.0	48.0	56	15 / 240
375013M	13	18.3	18.8	11.0	48.0	56	15 / 240
375014M	14	19.8	18.8	11.0	49.5	58	12 / 192
375015M	15	21.6	18.8	13.0	49.5	64	10 / 160
375016M	16	21.8	18.8	13.0	51.0	63	10 / 160
375017M	17	23.7	18.8	14.0	52.5	67	8 / 128
375018M	18	25.3	18.8	14.0	53.4	64	6 / 96
375019M	19	25.7	18.8	16.0	55.8	73	6 / 96

Bit Socket

- Socket made from chrome vanadium alloy steel
- Bit made from silicon alloy steel (S2)
- Polished, chrome plated.

CAUTION

In order to get normal life of bit socket,
Always use within limited torque of bits.

3021

- 3/8" drive bit socket
- Phillips head
- DIN ISO 8764-1

KING TONY	No.	Overall Length (mm)	g	
302102	2	50	35	20 / 400
302103	3	50	36	20 / 400
302104	4	50	37	20 / 400

3022

- 3/8" drive bit socket
- Slotted head
- DIN 5264/3120

KING TONY	Tip width (mm)	Tip thickness (mm)	Overall Length (mm)	g	
302205	5	1.0	50	36	20 / 400
302208	8	1.2	50	37	20 / 400
302210	10	1.6	50	38	20 / 400

3023

- 3/8" drive bit socket
- For torx internal screws
- DIN 3120

KING TONY	SIZE	Overall Length (mm)	g	
302308	T8	50	28	20 / 400
302309	T9	50	28	20 / 400
302310	T10	50	28	20 / 400
302315	T15	50	28	20 / 400
302320	T20	50	30	20 / 400
302325	T25	50	34	20 / 400
302327	T27	50	38	20 / 400
302330	T30	50	38	20 / 400
302340	T40	50	40	20 / 400
302345	T45	50	40	20 / 400
302350	T50	50	42	20 / 400

3025

- 3/8" drive bit socket
- Hexagon head
- DIN 7422/3120

KING TONY	mm	Overall Length (mm)	g	
302503	3	50	28	20 / 400
302504	4	50	30	20 / 400
302505	5	50	34	20 / 400
302506	6	50	38	20 / 400
302507	7	50	38	20 / 400
302508	8	50	40	20 / 400
302510	10	50	40	20 / 400
302512	12	50	42	20 / 400

Bit Socket

- Socket made from chrome vanadium alloy steel
- Bit made from silicon alloy steel (S2)
- Polished, chrome plated.

CAUTION

In order to get normal life of bit socket, Always use within limited torque of bits.

3039

- 3/8" drive ribe bit socket
- Use for VW, Audi, Fait, cylinder head bolt

KING TONY	SIZE	Overall Length (mm)	g	
303904	M4	90	68	8 / 160
303905	M5	90	69	8 / 160
303906	M6	90	71	8 / 160
303907	M7	90	72	8 / 160
303908	M8	90	88	8 / 160
303909	M9	90	89	8 / 160
303910	M10	90	90	8 / 160

3027

- 3/8" drive bit socket
- For tamper resistant torx screws
- DIN 3120

KING TONY	SIZE	Overall Length (mm)	g	
302708	T8	50	28	20 / 400
302709	T9	50	28	20 / 400
302710	T10	50	28	20 / 400
302715	T15	50	28	20 / 400
302720	T20	50	30	20 / 400
302725	T25	50	34	20 / 400
302727	T27	50	38	20 / 400
302730	T30	50	38	20 / 400
302740	T40	50	40	20 / 400
302745	T45	50	40	20 / 400
302750	T50	50	42	20 / 400

302D NEW

- 3/8" drive bit socket
- For torx plus tamper screws
- DIN 3120

KING TONY	SIZE	Overall Length (mm)	g	
302D08	IPR8	50	33.2	20 / 400
302D09	IPR9	50	33.2	20 / 400
302D10	IPR10	50	34.0	20 / 400
302D15	IPR15	50	34.0	20 / 400
302D20	IPR20	50	34.0	20 / 400
302D25	IPR25	50	34.0	20 / 400
302D27	IPR27	50	34.0	20 / 400
302D30	IPR30	50	34.8	20 / 400
302D40	IPR40	50	38.8	20 / 400
302D45	IPR45	50	38.8	20 / 400
302D50	IPR50	50	40.0	20 / 400
302D55	IPR55	50	47.4	15 / 300
302D60	IPR60	50	51.2	12 / 240

Ratchet

- MATERIAL
  - handle of chrome vanadium alloy steel
  - (gear) driver of chrome molybdenum steel
- FINISHING
  - polished, chrome plated
  - black driver by phosphate sunk

3755 DIN 3122

- 3/8" drive reversible ratchet
- 5° gear action degree (72 teeth)

KING TONY	Total (inch)	Length (mm)	g	
3755-08G	8	200	387.0	2 / 40
3755DK	renewal kits		-	-

3755-08G

3755DK

8781012KT

3760 DIN 3122

- 3/8" drive mini reversible ratchet
- 6° gear action degree (64 teeth)
- Five teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
3760-45	4 - 3/8	110	120.2	6 / 108
3760DK	renewal kits		-	-

3760-45

3760DK

8781012KT

3761 DIN 3122

- 3/8" drive reversible ratchet quick-release
- 11° gear action degree (32 teeth)
- Two teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
3761-08F	8	200	358.0	2 / 40
3761-08P	8	200	333.0	2 / 40
3761DK	renewal kits		-	-

3761-08F

3761-08P


3761DK

8781012KT

3769 DIN 3122

- 3/8" drive reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
3769-08F	8	200	358.0	2 / 40
3769-08P	8	200	358.0	2 / 40
3769DK	renewal kits		-	-

3769-08F

3769-08P

3769DK

8781012KT

Ratchet

3771 DIN 3122

- 3/8" drive reversible ratchet quick-release
- 11° gear action degree (32 teeth)
- Two teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
3771-08F	8	200	370	2 / 40
3771-08G	8	200	309	2 / 40
3771DK	renewal kits		-	-

3771-08F

3771-08G


3771DK

8781012KT

3779 DIN 3122

- 3/8" drive reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
3779-08F	8	200	355	2 / 40
3779-08G	8	200	295	2 / 40
3779DK	renewal kits		-	-

3779-08F

3779-08G

3779DK

8781012KT

3781 DIN 3122

- 3/8" drive flexible ratchet quick-release
- 11° gear action degree (32 teeth)
- Two teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
3781-11F	11	280	467	2 / 40
3781-11P	11	280	432	2 / 40
3781DK	renewal kits		-	-

3781-11F

3781-11P


3781DK

8781012KT

3789 DIN 3122

- 3/8" drive flexible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
3789-11F	11	280	480	2 / 40
3789-11P	11	280	490	2 / 40
3789DK	renewal kits		-	-

3789-11F

3789-11P


3789DK

8781012KT

Accessory

- MATERIAL - chrome vanadium alloy steel
- FINISHING - polished, chrome plated & black phosphate sunk

3221 DIN 3123

- 3/8" drive extension bar

KING TONY	Total (inch)	Length (mm)	g	
3221-16	1-3/4	44	39	14 / 224
3221-03	3	75	75	12 / 240
3221-06	6	150	146	6 / 120
3221-10	10	250	240	9 / 144
3221-18	18	450	428	1 / 50
3221-24	24	600	570	1 / 50

3221

8773KT

3223 DIN 3120

- 3/8" drive offset extension bar
- Max. torque 150 Nm

KING TONY	Total (inch)	Length (mm)	g	
3223-03	3	75	75	12 / 240
3223-06	6	150	146	6 / 120
3223-10	10	250	240	9 / 144

Warning
The offset extension bar has less strength than normal extension bar. Do not use as a normal extension bar.

3223

8773KT

3293

- 3/8" drive multi-function of extention bar and offset extension bar.
- Hex key is applicable to the hex shank.

KING TONY	Total (inch)	Length (mm)	g	
3293-03	3	75	80	12 / 240
3293-06	6	150	140	6 / 120
3293-10	10	250	240	9 / 144

1.offset extension bar
or

2.extension bar

8773KT

3311

- 3/8" drive flexible extension bar

KING TONY	Total (inch)	Length (mm)	g	
3311-06	6	150	148	5 / 100
3311-12	12	300	172	12 / 108

3311

8773KT

Accessory

3452 DIN 3122

- 3/8" drive flexible handle
- Action degree -180°

KING TONY	Total (inch)	Length (mm)	g	
3452-08F	8-1/2	215	259	4 / 80
3452-08G	8-1/2	215	278	2 / 40
3452-10F	10	250	319	4 / 80
3452-10G	10	250	325	3 / 60

3452-08F
3452-10F

3452-08G
3452-10G

3452DK

8781012KT

3571 DIN 3122

- 3/8" drive sliding T-handle

KING TONY	Total (inch)	Length (mm)	g	
3571-08	8	200	182	4 / 80

3571-08

8781012KT

3792 DIN 3123

- 3/8" drive universal joint

KING TONY	Total (inch)	Length (mm)	g	
3792	2	50	67	15 / 300

3792

8773KT

3812 3814 DIN 3123 ,ISO3316

- 3/8" drive adapter
- Converting to 1/4" drive or 1/2" drive
- 3812 → Max. torque 75 Nm

KING TONY	SPEC.	g	
3812	3/8"Fx1/4"M	31.5	12 / 192
3814	3/8"Fx1/2"M	47	12 / 360

1/4" drive (M)
1/2" drive (M)

3/8" drive (F)

3812 / 3814

8773KT

Bit Holder

3148

- 3/8" drive bit holder

KING TONY	SIZE	Total Length (mm)	g	
314808S	1/4"	30	33	12 / 360
314810S	5/16"	30	35	12 / 360
314810M	10mm	30	35	12 / 360

Socket Set

3007 MR 01

- 5 PC. 3/8" drive socket wrench set

	Contents
3007MR01	366021, 3789-11F, 366516, 3221-06, 3221-16

kg	
0.98	20

Extension Bar Set

3103 PR

- 3 PC. 3/8" drive offset extension bar set

	Contents
3103PR	3223 3" 6" 10"

kg	
0.4	35

3113 PR

- 3 PC. 3/8" drive extension bar set

	Contents
3113PR	3221 3" 6" 10"

kg	
0.5	35

Socket Rail

873

- 3/8" drive socket rail
- Rail length from 160 mm to 560 mm

KING TONY		CLIP	L (mm)	g	
870406		-	160	-	-
870311		-	280	-	-
870322		-	560	-	-
8730		-	-	-	-

Customer Selected

Socket Rail Set

3013 MR SR
3513 MR

- 13 PC. 3/8" drive socket set
  - Socket rail 290 mm L
  - Rail with 13 PC. 3/8" drive clip

	Contents	
3013MR	3330M: 7 8 9 10 11 12 13 14 15 16 17 18 19	8731213
3013SR	3330S: 1/4 5/16 11/32 3/8 7/16 15/32 1/2 9/16 19/32 5/8 11/16 3/4 13/16	
3513MR	3335M: 7 8 9 10 11 12 13 14 15 16 17 18 19	

3013MR / 3513MR

kg	
0.60	35

3106 PR
3116 PR

- 6 PC. 3/8" drive socket set
  - Socket rail 150 mm L
  - Rail with 6 PC. 3/8" drive clip

	Contents	
3106PR	3375M: E8 E10 E12 E14 E16 E18	8730606
3116PR	3275M: E4 E5 E8 E10 E12 E14	

3106PR



3116PR

	kg		Metal case size (mm)
3106PR	0.28	40	223 x 65 x 32 (0.016 cuft)
3116PR	0.39	50	

3105 PR

- 5 PC. 3/8" + 1/2" drive ribe bit socket set
  - Socket rail 150 mm L
  - Rail with 2 PC. 3/8" & 3 PC. 1/2" drive clip

	Contents	
3105PR	3039: M7 M8	8730605
	4049: M10 M12 M13	

kg	
0.75	1 / 30

Socket Set

3508 MR SR

- 8 PC. 3/8" drive deep socket set

	Contents
3508MR	3235M: 10 11 12 13 14 16 17 19
3508SR	3235S: 3/8 7/16 1/2 9/16 5/8 11/16 3/4 13/16

3508MR

3508SR

kg		Metal case size (mm)
1.0	20	203 x 79 x 41 (0.023 cuft)

3020 MR SR 02
3520 MR 02

- 20 PC. 3/8" drive socket wrench set

	Contents			
3020MR02	3330M: 6 7 8 9 10 11 12 13 14 17 19 21	22	363021	3779-08F, 3221-03, 3221-06
3520MR02	3335M: 6 7 8 9 10 11 12 13 14 17 19 21	23	363521	3452-08G, 3792
3020SR02	3330S: 1/4 5/16 11/32 3/8 7/16 15/32 1/2 9/16 19/32 11/16 3/4 13/16 7/8		363021	3571-08

3020MR02
3520MR02

3020SR02

kg		Metal case size (mm)
1.0	6	372 x 153 x 40 (0.08 cuft)

3023 MR
3523 MR

- 22 PC. 3/8" drive socket wrench set

	Contents	
3023MR	3330M: 6 7 8 9 10 11 12 13 14 15 16 17 19 20 21 22	3769-08F, 3571-08, 3452-08F, 3221-03, 3221-06, 3792
3523MR	3335M	

3023MR/3523MR

kg		Metal case size (mm)
2.8	6	372 x 153 x 40 (0.08 cuft)

3023 MR 04
3523 MR 04

- 22 PC. 3/8" drive socket wrench set

	Contents	
3023MR04	3330M: 6 7 8 9 10 11 12 13 14 15 16 17 19 20 21 22	3755-08G, 3571-08, 3452-08F, 3221-03, 3221-06, 3792
3523MR04	3335M	

3023MR04 / 3523MR04

kg		Metal case size (mm)
3.0	6	372 x 153 x 40 (0.08 cuft)

Socket Set

3024 MR SR
3524 MR

- 24 PC. 3/8" drive socket wrench set

	Contents		
3024MR	3330M: 6 7 8 9 10 11 13 14 17 19	3779-08G	3021: 2 3
3524MR	3335M: 6 7 8 9 10 11 13 14 17 19	3221-06	3022: 5 8
3024SR	3330S: 1/4 5/16 11/32 3/8 7/16 1/2 9/16 5/8 11/16 3/4	3792	3025: 3 4 5 6 7 8 10

3024MR/3524MR

3024SR

kg		Metal case size (mm)
2.2	10	318 x 147 x 46 (0.076 cuft)

3027 MR SR
3527 MR

- 26 PC. 3/8" drive socket wrench set

	Contents		
3027MR	3330M: 7 8 9 10 11 12 13 14 15 16 17 18 19	3235M: 8 10 11 12 13 14 16 17 19	3779-08G
3527MR	3335M: 7 8 9 10 11 12 13 14 15 16 17 18 19		3221-03
3027SR	3330S: 1/4 5/16 11/32 3/8 7/16 15/32 1/2 9/16 19/32 5/8 11/16 3/4 13/16		3792
	3235S: 5/16 3/8 7/16 1/2 9/16 5/8 11/16 3/4 13/16		3812

3027MR / 3527MR

3027SR

kg		Metal case size (mm)
2.6	10	318 x 147 x 46 (0.076 cuft)

Socket & Wrench Set

3034 MR
3534 MR

- 36 PC. 3/8" drive socket wrench set

Contents			
3034MR	3330M: 6 7 8 9 10 11 13 14 17 19	3375: E4 E5 E6 E7 E8 E10 E12 E14 E16 E18 3023: T8 T9 T10 T15 T20 T25 T27 T30 T40 T45	3452-10F 3779-08G 3571-08 3221-03 3221-06 3792
3534MR	3335M: 6 7 8 9 10 11 13 14 17 19		

3034MR / 3534MR

kg		Metal case size (mm)
3.1	6	372 x 153 x 40 (0.08 cuft)

3036 CR

- 36 PC. 3/8" drive socket wrench set

Contents			
3036CR	3330M: 6 7 8 9 10 11 12 13 14 15 16 17 19 20 21 22 3330S: 1/4 5/16 11/32 3/8 7/16 15/32 1/2 9/16 19/32 5/8 11/16 3/4 13/16 7/8	3769-08F 3221-03 3221-06 3452-08F	3571-08 3792

kg		Metal case size (mm)
3.27	6	372 x 153 x 40 (0.08 cuft)

3050 MR

- 50 PC. 3/8" drive combination socket set

Contents			
3050MR	3235M: 8 10 12 13 3330M: 6 7 8 9 10 11 12 13 14 15 17 18 19 22 1060: 8 10 12 13 14 17 19 1120: 3 4 5 6 7 8 10 1832T: T15 T20 T25 T30 T40 T45 T50	363516 3792 3571-08 1421 2x100 1422 5.5x100	363021 314810S 3221-03 3221-06 6111-06 3734-10F

kg		Blow case size (mm)
4.65	4	405 x 310 x 80 (0.36 cuft)

Standard Socket

- Chrome vanadium alloy steel, polished, chrome plated.
- 4 ball retaining grooves.

4330 M

- 1/2" drive
- 12 points
- Metric size
- Thin walled design on square driving side
- DIN 3124 ,ISO 2725-1

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
433008M	8	13.2	23.3	7.0	38	57	10 / 200
433009M	9	14.0	23.3	7.0	38	60	10 / 200
433010M	10	15.0	23.3	8.0	38	58	10 / 200
433011M	11	16.4	23.3	8.0	38	58	10 / 200
433012M	12	17.8	23.3	9.0	38	60	10 / 200
433013M	13	19.0	23.3	10.0	38	60	10 / 200
433014M	14	20.4	23.3	11.0	38	61	10 / 200
433015M	15	21.6	23.3	11.0	38	62	10 / 200
433016M	16	22.9	23.8	11.0	38	63	10 / 200
433017M	17	24.0	23.2	12.0	38	66	10 / 200
433018M	18	25.2	23.2	13.0	38	66	10 / 200
433019M	19	26.6	23.2	13.0	38	73	10 / 160
433020M	20	27.9	23.2	13.0	38	86	10 / 160
433021M	21	28.9	23.2	14.0	38	97	10 / 160
433022M	22	30.2	24.0	15.0	40	99	10 / 160
433023M	23	31.2	25.0	15.0	40	99	8 / 160
433024M	24	32.1	26.0	17.0	42	113	8 / 160
433025M	25	33.4	27.0	17.0	42	125	8 / 160
433026M	26	35.0	28.0	17.0	42	130	6 / 120
433027M	27	36.6	28.0	19.0	42	135	6 / 120
433028M	28	37.8	30.0	20.0	42	151	6 / 120
433029M	29	39.0	30.0	21.0	44	169	6 / 120
433030M	30	40.0	29.5	21.0	44	169	6 / 120
433032M	32	42.5	30.0	23.0	44	173	6 / 120
433033M	33	43.0	30.0	24.0	46	217	6 / 96
433036M	36	47.0	33.0	24.0	46	238	6 / 96

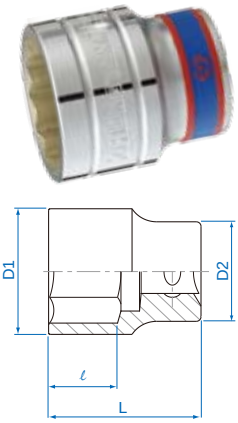

4330 S

- 1/2" drive
- 12 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.1

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
433010S	5/16	13.2	21.8	7.0	38	55	10 / 200
433012S	3/8	15.0	21.8	7.0	38	59	10 / 200
433013S	13/32	15.0	23.3	7.0	38	58	10 / 200
433014S	7/16	16.4	23.3	8.0	38	60	10 / 200
433015S	15/32	18.0	23.3	8.0	38	62	10 / 200
433016S	1/2	19.0	23.3	10.0	38	62	10 / 200
433018S	9/16	20.4	23.3	11.0	38	62	10 / 200
433019S	19/32	21.6	23.3	11.0	38	64	10 / 200
433020S	5/8	22.9	24.0	11.0	38	62	10 / 200
433022S	11/16	24.0	23.2	12.0	38	70	10 / 200
433024S	3/4	26.8	23.2	13.0	38	83	10 / 160
433025S	25/32	28.0	23.2	13.0	38	85	10 / 160
433026S	13/16	28.6	23.2	13.0	38	95	10 / 160
433028S	7/8	30.2	24.0	15.0	40	102	10 / 160
433030S	15/16	32.6	26.0	17.0	42	112	8 / 160
433032S	1	34.8	26.8	17.0	42	130	8 / 160
433034S	1-1/16	36.6	28.0	19.0	42	135	6 / 120
433036S	1-1/8	39.0	30.0	21.0	44	160	6 / 120
433038S	1-3/16	40.0	29.5	21.0	44	169	6 / 120
433040S	1-1/4	42.5	30.0	23.0	44	173	6 / 120

Standard Socket

- Chrome vanadium alloy steel, polished, chrome plated.
- 4 ball retaining grooves.

4335 M

- 1/2" drive
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3124 ,ISO 2725-1

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
433506M	6	12.0	23.3	7.0	38	105	10 / 200
433507M	7	12.6	23.3	7.0	38	102	10 / 200
433508M	8	13.2	23.3	7.0	38	61	10 / 200
433509M	9	14.0	23.3	7.0	38	59	10 / 200
433510M	10	15.0	23.3	8.0	38	60	10 / 200
433511M	11	16.4	23.3	8.0	38	60	10 / 200
433512M	12	17.8	23.3	9.0	38	61	10 / 200
433513M	13	19.0	23.3	10.0	38	63	10 / 200
433514M	14	20.4	23.3	11.0	38	63	10 / 200
433515M	15	21.6	23.3	11.0	38	66	10 / 200
433516M	16	22.9	23.8	11.0	38	64	10 / 200
433517M	17	24.0	23.2	12.0	38	68	10 / 200
433518M	18	25.2	23.2	13.0	38	75	10 / 200
433519M	19	26.6	23.2	13.0	38	86	10 / 160
433520M	20	27.9	23.2	13.0	38	95	10 / 160
433521M	21	28.9	23.2	14.0	38	97	10 / 160
433522M	22	30.2	24.0	15.0	40	105	10 / 160
433523M	23	31.2	25.0	15.0	40	118	8 / 160
433524M	24	32.1	26.0	17.0	42	138	8 / 160
433525M	25	33.4	27.0	17.0	42	141	8 / 160
433526M	26	35.0	28.0	17.0	42	158	6 / 120
433527M	27	36.6	28.0	19.0	42	161	6 / 120
433528M	28	37.8	30.0	20.0	42	162	6 / 120
433529M	29	39.0	30.0	21.0	44	199	6 / 120
433530M	30	40.0	29.5	21.0	44	214	6 / 120
433532M	32	42.5	30.0	23.0	44	236	6 / 120
433533M	33	43.0	30.0	24.0	46	227	6 / 96
433534M	34	45.0	30.0	24.0	46	231	6 / 96
433536M	36	47.0	33.0	24.0	46	248	6 / 96
433538M	38	49.0	34.0	25.0	50	241	6 / 60
433539M	39	50.0	34.0	25.0	50	240	6 / 60
433541M	41	53.0	36.0	27.0	53	284	6 / 60
433546M	46	59.0	40.0	30.0	58	500	4 / 32



4335 S

- 1/2" drive
- 6 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.1

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
433510S	5/16	13.2	21.8	7.0	38	60	10 / 200
433512S	3/8	15.0	21.8	7.0	38	58	10 / 200
433514S	7/16	16.4	23.3	8.0	38	60	10 / 200
433515S	15/32	18.0	23.3	8.0	38	63	10 / 200
433516S	1/2	19.0	23.3	10.0	38	61	10 / 200
433518S	9/16	20.4	23.3	11.0	38	61	10 / 200
433519S	19/32	21.6	23.3	11.0	38	65	10 / 200
433520S	5/8	22.9	24.0	11.0	38	60	10 / 200
433522S	11/16	24.0	23.2	12.0	38	67	10 / 200
433524S	3/4	26.8	23.2	13.0	38	87	10 / 160
433525S	25/32	28.0	23.2	13.0	38	96	10 / 160
433526S	13/16	28.6	23.2	13.0	38	91	10 / 160
433528S	7/8	30.2	24.0	15.0	40	102	10 / 160
433530S	15/16	32.6	26.0	17.0	42	118	8 / 160
433532S	1	34.8	26.8	17.0	42	143	8 / 160
433534S	1-1/16	36.6	28.0	19.0	42	167	6 / 120
433536S	1-1/8	39.0	30.0	21.0	44	163	6 / 120
433538S	1-3/16	40.0	29.5	21.0	44	214	6 / 120
433540S	1-1/4	42.5	30.0	23.0	44	226	6 / 120



Deep Socket

- Chrome vanadium alloy steel, polished, chrome plated.
- 4 ball retaining grooves.

4230 M

- 1/2" drive
- 12 points
- Metric size
- Thin walled design on square driving side
- DIN 3124 ,ISO 2725-1

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
423008M	8	13.2	22.0	16	77	107	6 / 120
423009M	9	14.0	22.0	16	77	112	6 / 120
423010M	10	15.2	23.7	24	77	116	6 / 120
423011M	11	16.3	23.7	24	77	119	6 / 120
423012M	12	17.7	23.7	24	77	123	6 / 120
423013M	13	18.7	23.7	24	77	125	6 / 120
423014M	14	20.2	23.7	35	77	138	6 / 120
423015M	15	21.3	23.7	35	77	138	6 / 120
423016M	16	22.6	23.7	35	77	147	6 / 96
423017M	17	23.7	23.2	35	77	151	6 / 96
423018M	18	25.5	23.2	35	77	182	6 / 96
423019M	19	26.7	23.2	35	77	176	6 / 96
423020M	20	27.7	24.0	35	77	201	6 / 96
423021M	21	28.7	25.0	35	77	220	6 / 96
423022M	22	29.8	26.0	35	77	205	6 / 96
423023M	23	31.2	27.5	35	77	207	5 / 60
423024M	24	31.8	28.5	35	77	195	5 / 60
423025M	25	33.4	29.5	35	77	227	5 / 60
423026M	26	34.8	30.5	35	77	252	5 / 60
423027M	27	36.6	31.5	34	77	304	5 / 60
423028M	28	37.8	32.5	34	77	304	5 / 50
423029M	29	38.8	33.5	34	77	308	5 / 50
423030M	30	39.8	34.5	34	77	319	5 / 50
423032M	32	41.8	36.0	34	77	334	5 / 50
423033M	33	43.8	38.5	35	77	360	4 / 48
423036M	36	46.8	40.5	36	77	443	2 / 40



4230 S

- 1/2" drive
- 12 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.1

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
423010S	5/16	13.2	22.0	9	77	107	6 / 120
423012S	3/8	14.7	22.0	10	77	116	6 / 120
423014S	7/16	16.3	23.7	12	77	119	6 / 120
423016S	1/2	18.7	23.7	14	77	125	6 / 120
423018S	9/16	20.2	23.7	15	77	138	6 / 120
423020S	5/8	22.6	23.7	17	77	147	6 / 96
423022S	11/16	23.7	23.2	35	77	151	6 / 96
423024S	3/4	26.7	23.2	35	77	176	6 / 96
423026S	13/16	28.6	25.0	37	77	190	6 / 96
423028S	7/8	29.8	26.0	37	77	203	6 / 96
423030S	15/16	31.8	28.5	37	77	205	5 / 60
423032S	1	33.8	29.5	37	77	277	5 / 60
423034S	1-1/16	36.6	31.5	28	77	305	5 / 60
423036S	1-1/8	37.8	32.5	28	77	306	5 / 50
423038S	1-3/16	39.8	34.5	34	77	319	5 / 50
423040S	1-1/4	41.8	36.0	34	77	330	5 / 50



Deep Socket

- Chrome vanadium alloy steel, polished, chrome plated.
- 4 ball retaining grooves.

4235 M

- 1/2" drive
- 6 points
- Thin walled design on square driving side
- Metric size
- DIN 3124 ,ISO 2725-1

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
423508M	8	13.2	22.0	16	77	113	6 / 120
423509M	9	14.0	22.0	16	77	114	6 / 120
423510M	10	15.2	23.7	24	77	116	6 / 120
423511M	11	16.3	23.7	24	77	118	6 / 120
423512M	12	17.7	23.7	24	77	125	6 / 120
423513M	13	18.7	23.7	24	77	124	6 / 120
423514M	14	20.2	23.7	35	77	127	6 / 120
423515M	15	21.3	23.7	35	77	140	6 / 120
423516M	16	22.6	23.7	35	77	139	6 / 96
423517M	17	23.7	23.2	35	77	132	6 / 96
423518M	18	25.5	23.2	35	77	136	6 / 96
423519M	19	26.7	23.2	35	77	151	6 / 96
423520M	20	27.7	24.0	35	77	194	6 / 96
423521M	21	28.7	25.0	35	77	163	6 / 96
423522M	22	29.8	26.0	35	77	166	6 / 96
423523M	23	31.2	27.5	35	77	208	5 / 60
423524M	24	31.8	28.5	35	77	212	5 / 60
423525M	25	33.4	29.5	35	77	224	5 / 60
423526M	26	34.8	30.5	35	77	244	5 / 60
423527M	27	36.6	31.5	34	77	270	5 / 60
423528M	28	37.8	32.5	34	77	312	5 / 50
423529M	29	38.8	33.5	34	77	309	5 / 50
423530M	30	39.8	34.5	34	77	307	5 / 50
423532M	32	41.8	36.0	34	77	334	5 / 50
423533M	33	43.8	38.5	35	77	346	4 / 48
423536M	36	46.8	40.5	36	77	410	2 / 40
423538M	38	49.0	40.5	38	77	620	2 / 40
423541M	41	53.0	40.5	40	77	665	2 / 24



4235 S

- 1/2" drive
- 6 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.1

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
423510S	5/16	13.2	22.0	16	77	116	6 / 120
423512S	3/8	14.7	22.0	16	77	116	6 / 120
423514S	7/16	16.3	23.7	24	77	118	6 / 120
423516S	1/2	18.7	23.7	24	77	130	6 / 120
423518S	9/16	20.2	23.7	35	77	138	6 / 120
423520S	5/8	22.6	23.7	35	77	139	6 / 96
423522S	11/16	23.7	23.2	35	77	115	6 / 96
423524S	3/4	26.7	23.2	35	77	140	6 / 96
423526S	13/16	28.6	25.0	35	77	163	6 / 96
423528S	7/8	29.8	26.0	35	77	166	6 / 96
423530S	15/16	31.8	28.5	35	77	195	5 / 60
423532S	1	33.8	29.5	35	77	277	5 / 60
423534S	1-1/16	36.6	31.5	34	77	239	5 / 60
423536S	1-1/8	37.8	32.5	34	77	309	5 / 50
423538S	1-3/16	39.8	34.5	34	77	307	5 / 50
423540S	1-1/4	41.8	36.0	34	77	334	5 / 50
423542S	1-5/16	44.0	38.5	35	77	377	4 / 48
423544S	1-3/8	46.0	38.5	35	77	401	2 / 40
423546S	1-7/16	47.5	40.5	36	77	424	2 / 40
423548S	1-1/2	49.0	40.5	38	77	461	2 / 40



Deep Socket

- Chrome vanadium alloy steel, polished, chrome plated.
- 4 ball retaining grooves.

4245 M

- 1/2" drive
- 6 points
- Thin walled design on square driving side
- Metric size
- DIN 3120

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
424508M	8	13.2	22.0	9.0	90	110	6/120
424509M	9	14.0	22.0	10.0	90	113	6/120
424510M	10	15.2	23.7	11.0	90	133	6/120
424512M	12	17.7	23.7	13.0	90	155	6/120
424513M	13	18.7	23.7	14.0	90	157	6/120
424514M	14	20.2	23.7	15.0	90	162	6/120



4255 M

- 1/2" drive
- 6 points
- Thin walled design on square driving side
- Metric size
- DIN 3120

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
425508M	8	13.2	22.0	20.0	120	135	6/96
425509M	9	14.0	22.0	25.0	120	145	6/96
425510M	10	15.2	23.7	32.0	120	162	6/96
425512M	12	17.7	23.7	32.0	120	200	6/96
425513M	13	18.7	23.7	32.0	120	202	6/96
425514M	14	20.2	23.7	32.0	120	217	6/96



Star Socket

- Chrome vanadium alloy steel, polished, chrome plated.
- 4 ball retaining grooves.

4375 M

- 1/2" drive star socket
- For torx external screws
- Chrome vanadium steel
- Polished, chrome plated
- DIN 3120

KING TONY	SIZE	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
437510M	E10	13.2	23.8	7.5	37	60	10 / 200
437512M	E12	15.0	23.8	9.0	37	62	10 / 200
437514M	E14	16.4	23.8	10.0	37	64	10 / 200
437516M	E16	18.8	23.8	11.0	37	68	10 / 200
437518M	E18	20.5	23.8	12.5	39	72	10 / 200
437520M	E20	22.8	23.8	14.0	39	74	10 / 200
437522M	E22	24.6	23.8	16.0	39	75	10 / 200
437524M	E24	26.5	23.8	16.0	39	83	10 / 160



4275 M

- 1/2" drive star socket
- Long type

KING TONY	SIZE	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
427510M	E10	13.2	23.8	7.5	77	109	6 / 120
427512M	E12	15.0	23.8	9.0	77	119	6 / 120
427514M	E14	16.4	23.8	10.0	77	125	6 / 120
427516M	E16	18.8	23.8	11.0	77	138	6 / 120
427518M	E18	20.5	23.8	12.5	77	149	6 / 120
427520M	E20	22.8	23.8	14.0	77	167	6 / 120
427522M	E22	24.6	23.8	16.0	77	172	6 / 96
427524M	E24	26.5	23.8	16.0	77	191	6 / 96



Square Socket

4014 M

- 1/2" drive square sockets
- 4 ball retaining grooves
- Chrome vanadium steel
- Polished,chrome plated
- DIN 3120

KING TONY	SIZE (mm)	D (mm)	ℓ (mm)	L (mm)	g	
401408M	8.0	23.5	13.5	35	60	10 / 200
401409M	9.5	23.5	13.5	35	68	10 / 200
401410M	10.0	23.5	13.5	35	72	10 / 200
401411M	10.5	23.5	13.5	35	78	10 / 200
401412M	12.0	23.5	13.5	35	90	10 / 200
401413M	12.7	23.5	13.5	35	97	10 / 200
401414M	13.5	23.5	13.5	35	106	10 / 200
401419M	19.0	25.0	15.5	40	130	10 / 160



Bit Holder

4148

- 1/2" drive bit holder

KING TONY	SIZE	Overall Length (mm)	g	
414808S	1/4"	38	50	10 / 200
414810S	5/16"	38	60	10 / 200
414810M	10mm	38	65	10 / 200

Spark Plug Socket

- Chrome vanadium alloy steel, polished, chrome plated
- 4 ball retaining grooves

4630 4635
4660 4665
463016 466016

- 1/2" drive spark plug socket
- 6 / 12 points
- Size combined
  - 16.0mm (5/8")
  - 20.8mm (13/16")
- Inside sleeve
  - rubber
  - magnet
- DIN 3120

Magnet

KING TONY	TYPE	SIZE (mm) (inch)	D (mm)	L (mm)	g	
463516	6 points Rubber	16.0 (5/8")	20.75	70	110	10 / 200
466516	6 points Magnet	16.0 (5/8")	20.75	70	115	10 / 200
463016	12 points Rubber	16.0 (5/8")	20.75	70	110	10 / 200
466016	12 points Magnet	16.0 (5/8")	20.75	70	115	10 / 200
463521	6 points Rubber	20.8 (13/16")	27.7	70	155	12 / 120
466521	6 points Magnet	20.8 (13/16")	27.7	70	160	12 / 120
463021	12 points Rubber	20.8 (13/16")	27.7	70	160	12 / 120
466021	12 points Magnet	20.8 (13/16")	27.7	70	165	12 / 120

463516 -Thin walled design

466516 -Thin walled design

463016 -Thin walled design

466016 -Thin walled design

463021

466021

463521

466521





Bit Socket

- Socket made from chrome vanadium alloy steel
- Bit made from silicon alloy steel (S2)
- Polished, chrome plated.

CAUTION

In order to get normal life of bit socket,
Always use within limited torque to bits.

⊕ 4021

- 1/2" drive bit socket
- Phillips head
- DIN ISO 8764-1

KING TONY	No.	Overall Length (mm)	g	
402102	2	60	77	10 / 180
402103	3	60	77	10 / 180
402104	4	60	77	10 / 180

⊖ 4022

- 1/2" drive bit socket
- Slotted head
- DIN 5264/3120

KING TONY	Tip width (mm)	Tip thickness (mm)	Overall Length (mm)	g	
402208	8	1.2	60	77	10 / 180
402210	10	2.0	60	83	10 / 180
402212	12	2.2	60	110	10 / 180
402214	14	2.5	60	112	10 / 180
402216	16	2.5	60	113	10 / 180

4025
4035

- 1/2" drive bit socket
- Hexagon head
- DIN 7422

4025

4035

KING TONY	mm	Overall Length (mm)	g	
402503	3	60	68	10 / 180
402504	4	60	68	10 / 180
403504	4	80	90	6 / 120
402505	5	60	70	10 / 180
403505	5	80	90	6 / 120
402506	6	60	72	10 / 180
403506	6	80	90	6 / 120
402507	7	60	75	10 / 180
403507	7	80	90	6 / 120
402508	8	60	75	10 / 180
403508	8	80	93	6 / 120
402510	10	60	85	10 / 180
403510	10	80	107	6 / 120
402512	12	60	117	10 / 180
403512	12	80	145	6 / 120
402514	14	60	120	10 / 180
403514	14	80	145	6 / 120
402517	17	66	153	12 / 120
403517	17	80	200	6 / 120
402519	19	66	225	10 / 120
403519	19	80	245	6 / 96

4026
4036
4066

- 1/2" drive bit socket
- Spline head
- DIN 3120

4026

4036

4066

KING TONY	SIZE	Overall Length (mm)	g	
402605	M 5	60	70	10 / 180
402606	M 6	60	72	10 / 180
403606	M 6	80	85	6 / 120
402608	M 8	60	73	10 / 180
403608	M 8	80	90	6 / 120
402610	M10	60	85	10 / 180
403610	M10	80	107	6 / 120
402612	M12	60	113	10 / 180
403612	M12	80	142	6 / 120
402614	M14	60	117	10 / 180
406608	M8	140	109	6 / 120
406610	M10	140	138	6 / 120
406612	M12	140	175	6 / 120

Bit Socket

- Socket made from chrome vanadium alloy steel
- Bit made from silicon alloy steel (S2)
- Polished, chrome plated.

CAUTION

In order to get normal life of bit socket, Always use within limited torque to bits.

402B

- Spline head
- Tamper resistant type

KING TONY	SIZE	Total Length (mm)	g	
402B16	M 16	66	150	10 / 120
402B18	M 18	66	201	10 / 120

4023
4033

- 1/2" drive bit socket
- For torx internal screws DIN 3120

4023

4033

KING TONY	SIZE	Total Length (mm)	g	
402320	T20	60	72	10 / 180
403320	T20	80	78	6 / 120
402325	T25	60	72	10 / 180
403325	T25	80	79	6 / 120
402327	T27	60	72	10 / 180
403327	T27	80	80	6 / 120
402330	T30	60	75	10 / 180
403330	T30	80	80	6 / 120
402340	T40	60	75	10 / 180
403340	T40	80	81	6 / 120
402345	T45	60	80	10 / 180
403345	T45	80	81	6 / 120
402350	T50	60	82	10 / 180
403350	T50	80	82	6 / 120
402355	T55	60	85	10 / 180
403355	T55	80	99	6 / 120
402360	T60	60	115	10 / 180
403360	T60	80	134	6 / 120
402370	T70	60	116	10 / 180
403370	T70	80	143	6 / 120

404108

- 1/2" drive bit socket
- Spline head
- DIN 3120

Use for Toyota Tercel cylinder head bolt

KING TONY	SIZE	Total Length (mm)	g	
404108	M8.9	100	129.4	6 / 120

4027
4037

- 1/2" drive bit socket
- For tamper resistant torx screws
- DIN 3120

4027

4037

KING TONY	SIZE	Total Length (mm)	g	
402720	T20	60	72	10 / 180
403720	T20	80	78	6 / 120
402725	T25	60	72	10 / 180
403725	T25	80	79	6 / 120
402727	T27	60	72	10 / 180
403727	T27	80	80	6 / 120
402730	T30	60	75	10 / 180
403730	T30	80	80	6 / 120
402740	T40	60	75	10 / 180
403740	T40	80	81	6 / 120
402745	T45	60	80	10 / 180
403745	T45	80	81	6 / 120
402750	T50	60	82	10 / 180
403750	T50	80	82	6 / 120
402755	T55	60	85	10 / 180
403755	T55	80	99	6 / 120
402760	T60	60	115	10 / 180
403760	T60	80	134	6 / 120

Ribe Bit Socket

4049

- 1/2" drive ribe bit socket
- Use for VW, Audi, Fait, cylinder head bolt

KING TONY	SIZE	Total Length (mm)	g	
404904	M4	100	94	6 / 120
404905	M5	100	95	6 / 120
404906	M6	100	96	6 / 120
404907	M7	100	97	6 / 120
404908	M8	100	98	6 / 120
404909	M9	100	100	6 / 120
404910	M10	100	106	6 / 120
404925	M10.5	100	110	6 / 120
404912	M12	100	132	6 / 120
404913	M13	100	162	6 / 120
404914	M14	100	164	6 / 120
404916	M16	100	166	6 / 120

Ratchet

- MATERIAL
  - handle of chrome vanadium alloy steel
  - (gear) driver of chrome molybdenum steel
- FINISHING
  - polished, chrome plated
  - black driver by phosphate sunk

4725 DIN 3122

- 1/2" drive reversible ratchet
- 8° gear action degree (45 teeth)

KING TONY	Total (inch)	Length (mm)	g	
4725-10F	10	250	573.0	2 / 40
4725-10G	10	250	617.0	1 / 20
4725-12F	12	300	642.0	2 / 40
4725-12G	12	300	762..0	1 / 20
4725-12B	12	300	644.0	2 / 40
4725DK01	renewal kits		-	-

4725-10F
4725-12F

4725-10G
4725-12G

4725-12B

4725DK01

8781013KT

4755 DIN 3122

- 1/2" drive reversible ratchet
- 5° gear action degree (72 teeth)

KING TONY	Total (inch)	Length (mm)	g	
4755-10G	10	250	570.0	1 / 20
4755DK	renewal kits		-	1 / 20

4755-10G



4755DK

8781013KT

4760 DIN 3122

- 1/2" drive mini reversible ratchet
- 6° gear action degree (64 teeth)
- Two teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
4760-05	4-3/4	120	222.4	5 / 108
4760DK	renewal kits		-	-

4760-05

4760DK

8781013KT

Ratchet

4762 DIN 3122

- 1/2" drive reversible ratchet quick-release
- 11° gear action degree (32 teeth)
- Two teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
4762-10G	10	250	565	5 / 30
4762-10F	10	250	590	6 / 36
4762-10P	10	250	563	6 / 36
4762-15G	15	375	711	5 / 20
4762-15F	15	375	750	6 / 24
4762-15P	15	375	728	6 / 24
4762DK	renewal kits		-	-

4762-10G / 4762-15G

4762-10F / 4762-15F

4762-10P / 4762-15P

4762DK

8781013KT

4767 DIN 3122

- 1/2" drive reversible ratchet (19mm socket included)
- 11° gear action degree (32 teeth)
- Two teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
4767-10G	10	250	530	5 / 30
4767-10F	10	250	563	6 / 36
4767-15G	15	375	690	5 / 20
4767-15F	15	375	736	6 / 24
4767DK	renewal kits		-	-

4767-10G / 4767-15G

4767-10F / 4767-15F

19mm 12 point

4767DK

8781013KT

4768 DIN 3122

- 1/2" drive reversible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
4768-10G	10	250	549	1 / 20
4768-10F	10	250	589	6 / 36
4768-10P	10	250	562	2 / 40
4768-15G	15	375	720	5 / 20
4768-15F	15	375	776	6 / 24
4768-15P	15	375	734	6 / 24
4768DK	renewal kits		-	-

4768-10G / 4768-15G

4768-10F / 4768-15F

4768-10P / 4768-15P

4768DK

8781013KT

Ratchet

4771 DIN 3122

- 1/2" drive reversible ratchet quick-release
- 11° gear action degree (32 teeth)
  Two teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
4771-10B	10	250	624	2 / 40
4771-10F	10	250	659	2 / 40
4771-10G	10	250	623	1 / 20
4771DK01	renewal kits		-	-

4771-10B

4771-10F

4771-10G

4771DK01

8781013KT

4779 DIN 3122

- 1/2" drive reversible ratchet
- 11° gear action degree (32 teeth)
  Two teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
4779-10B	10	250	590	2 / 40
4779-10F	10	250	615	2 / 40
4779-10G	10	250	580	1 / 20
4779DK01	renewal kits		-	-

4779-10B

4779-10F

4779-10G

4779DK01

8781013KT

4781 DIN 3122

- 1/2" drive flexible ratchet quick-release
- 11° gear action degree (32 teeth)
- Two teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
4781-12F	12	300	792	1 / 20
4781-12P	12	300	758	1 / 20
4781DK	renewal kits		-	-

4781-12F

4781-12P

4781DK

8781013KT

4789 DIN 3122

- 1/2" drive flexible ratchet
- 11° gear action degree (32 teeth)
- Two teeth pawl action

KING TONY	Total (inch)	Length (mm)	g	
4789-12F	12	300	735	1 / 20
4789-12P	12	300	735	1 / 20
4789DK	renewal kits		-	-

4789-12F

4789-12P

4789DK

8781013KT

Accessory

- MATERIAL - chrome vanadium alloy steel
- FINISHING - polished, chrome plated & black phosphate sunk

4121

- 1/2" drive adjustable handle
- Push-Lock design

KING TONY	Total (inch)	Length (mm)	g	
4121-11GR	11-1/2	295	544	1 / 20

4121-11GR

4221

- 1/2" drive extension bar

KING TONY	Total (inch)	Length (mm)	g	
4221-18	18	450	550	1 / 20
4221-24	24	600	685	1 / 20
4221-30	30	750	860	1 / 20
4221-36	36	900	1030	1 / 20

4221

4223 DIN 3120

- 1/2" drive offset extension bar
- Max. torque 320 Nm

KING TONY	Total (inch)	Length (mm)	g	
4223-02	2	55	94	12 / 216
4223-05	5	125	198	4 / 80
4223-10	10	250	357	4 / 64

Warning
The offset extension bar has less strength than normal extension bar. Do not use as a normal extension bar.

4223

8774KT

4251 DIN 3123

- 1/2" drive extension bar

KING TONY	Total (inch)	Length (mm)	g	
4251-02	2	55	98	12 / 216
4251-03	3	75	138	6 / 120
4251-04	4	100	163	4 / 80
4251-05	5	125	192	4 / 80
4251-06	6	150	230	6 / 96
4251-08	8	200	270	4 / 64
4251-10	10	250	433	4 / 64

4251

8774KT

4293

- 1/2" drive multi-function of extention bar and offset extension bar.

KING TONY	Total (inch)	Length (mm)	g	
4293-02	2	55	55	12 / 216
4293-05	5	125	200	4 / 80
4293-10	10	250	420	4 / 64

4293

1.offset extension bar

or

2.extension bar

8774KT

Accessory

- MATERIAL - chrome vanadium alloy steel
- FINISHING - polished, chrome plated & black phosphate sunk

4311 DIN 3122

- 1/2" drive speed brace

KING TONY	Total (inch)	Length (mm)	g	
4311-16F	16-1/4	412	545	5 / 40
4311-16G	16-1/4	412	545	5 / 40

4452 DIN 3122

- 1/2" drive flexible handle
- Action degree -180°

KING TONY	Total (inch)	Length (mm)	g	
4452-15F	15	375	720	2 / 24
4452-18F	18	450	828	2 / 20
4452-24F	24	600	1165	1 / 20
4452DK	renewal kits	(for 15F/18F)	62	250 / 250
4452DK1	renewal kits	(for 24F)		

4452

4452DK

8781013KT

4462 DIN 3122

- 1/2" drive flexible handle
- Action degree -180°

KING TONY	Total (inch)	Length (mm)	g	
4462-18F	18	463	1046	1 / 20
4462-24F	24	613	1350	1 / 20
4462DK	renewal kits		-	-

4462

4462DK

4572 DIN 3122

- 1/2" drive sliding T-handle

KING TONY	Total (inch)	Length (mm)	g	
4572-10	10	250	370	2 / 40
4572-12	12	300	433	3 / 60
4572DK	renewal kits		-	-

4572-10 / 4572-12

4572DK

8781013KT

4573 DIN 3120

- 1/2" drive sliding T-handle

KING TONY	Total (inch)	Length (mm)	g	
4573-10	10	250	497	2 / 40
4573DK	renewal kits		-	-

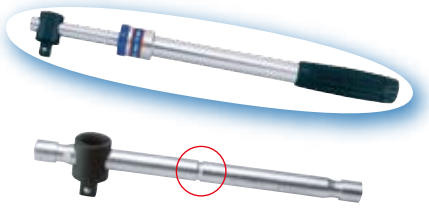
4573-10

4573DK

Accessory

- MATERIAL - chrome vanadium alloy steel
- FINISHING - polished, chrome plated & black phosphate sunk

4581 DIN 3122

- 1/2" drive 90° L-handle

KING TONY	Total (inch)	Length (mm)	g	
4581-10	10	250	429	2 / 40

4581-10

4583 DIN 3120

- 1/2" drive 105° L-handle

KING TONY	Total (inch)	Length (mm)	g	
4583-12	12-1/2	315	545	1 / 40

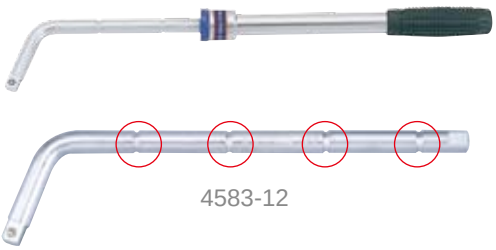
4583-12

4584 DIN 3120

- 1/2" drive 90° L-handle

KING TONY	Total (inch)	Length (mm)	g	
4584-12	12	300	550	1 / 40

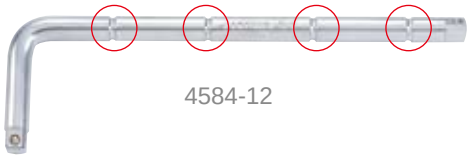
4584-12

4791 DIN 3123, ISO 3316

- 1/2" drive universal joint

KING TONY	Total (inch)	Length (mm)	g	
4791	3	77.5	163	5 / 100

4791

8774KT

4813 4816 DIN 3123 ,ISO 3316

- 1/2" drive adapter
- Converting to 3/8" drive or 3/4" drive
- 4813 → Max. torque 350 Nm

KING TONY	SPEC.	g	
4813	1/2"Fx3/8"M	61	10 / 200
4816	1/2"Fx3/4"M	114	10 / 200

4813

3/8" drive(M)

4816

3/4" drive(M)

← 1/2"drive(F)

Socket Shelf Set

4072
MR (172 PC.)
SR (136 PC.)

4572
MR (172 PC.)
SR (136 PC.)

- 1/2" drive standard socket shelf set

4072MR / 4572MR

	Contents	Each Q'ty
4072MR	4330M: 8 9 10 11 12 13 14 15 16 17 18	8
	19 20 21 22 23 24 25	7
4572MR	4335M: 26 27 28 29 30	6
	32	5
4072SR	4330S: 5/16 3/8 7/16 15/32 1/2 9/16 19/32 5/8 11/16	8
	3/4 25/32 13/16 7/8 15/16	7
4572SR	4335S: 1 1-1/16 1-1/8 1-3/16	6
	1-1/4	5

	SPEC	kg	CUFT	Metal shelf size (mm)
4072MR -A / 4572MR -A	87103	10.3	2.3	257 x 297 x 427
4072MR -D / 4572MR -D	172 PC. socket content	26.0	0.6	
4072SR -A / 4572SR -A	87103	10.3	2.3	
4072SR -D / 4572SR -D	136 PC. socket content	24.7	0.6	

4066
MR (165 PC.)
SR (114 PC.)

4566
MR (165 PC.)

- 1/2" drive standard socket shelf set

4066MR / 4566MR

	Contents	Each Q'ty
4066MR	4230M: 8 9 10 11 12 13 14 15 16 17 18	8
	19 20 21 22 23 24	7
4566MR	4235M: 26 27 28 29 30	6
	32	5
4066SR	4230S: 5/16 3/8 7/16 1/2 9/16 5/8 11/16	8
	3/4 13/16 7/8 15/16 1	7
	1-1/16 1-1/8 1-3/16	6
	1-1/4	5

	SPEC	kg	CUFT	Metal shelf size (mm)
4066MR -A / 4566MR -A	87103	10.3	2.3	257 x 297 x 427
4066MR -D / 4566MR -D	165 PC. socket content	40.5	2.1	
4066SR - A	87103	10.3	2.3	
4066SR - D	114 PC. socket content	30.2	2.1	

Socket Rail

874

- 1/2" drive socket rail
- Rail length from 160 mm to 560 mm

KING TONY		CLIP	L (mm)	g	
870406		-	160	-	-
870410		-	260	-	-
870422		-	560	-	-
8740		-	-	-	-

Customer Selected

Socket Rail Set

4010 MR SR
4510 MR SR

- 8 PC. 1/2" drive socket set
- Socket rail 230mm L
  - Rail with 8 PC. 1/2" drive clips

Contents		
4010MR	4330M 10 12 13 14 17 19 21 22	8740908
4510MR	4335M	
4010SR	4330S 3/8 7/16 1/2 9/16 1/16 3/4 13/16 7/8	
4510SR	4335S	

kg	
0.64	40

4106 PR

- 6 PC. 1/2" drive socket set
- Socket rail 230mm L
  - Rail with 6 PC. 1/2" drive clips

Contents		
4106PR	4375M E10 E12 E14 E16 E18 E20	8740906

kg	
0.51	40

4118 MR

- 8 PC. 1/2" drive socket set
- Socket rail 230mm L
  - Rail with 8 PC. 1/2" drive clips

Contents		
4118MR	4014 8 9.5 10 10.5 12 12.7 13.5 19	8740908

kg	
0.57	40

4311 MR

- 11 PC. 1/2" drive socket set
- Socket rail 230mm L
  - Rail with 8 PC. 1/2" drive clips

Contents		
4311MR	4335M 10 11 13 14 15 17 18 19	4725-10G 4572-10 4251-05 8740908

kg	
1.92	12

Socket Rail Set

4116 PR

- 6 PC. 1/2" drive ribe bit socket set
  Socket rail 180mmL
  - Rail with 6 PC. 1/2" drive clips

	Contents	
4116PR	4049 M9 M10 M12 M13 M14 M16	8740706

kg	
0.38	1 / 20

4126 PR

- 4 PC. 1/2" drive socket set
- Socket rail 127mm L
  - Rail with 4 PC. 1/2" drive clips

	Contents	
4126PR	4026 M6 M8 M10 M12	8740504

kg	
0.38	1 / 50

4105 PR

- 5 PC. 1/2" drive socket set
- Socket rail 150mm L
  - Rail with 5 PC. 1/2" drive clips

	Contents	
4105PR	4026 M8 M10 M12 M14 402B M16	8740605

kg	
0.57	1 / 50

4136 PR

- 4 PC. 1/2" drive socket set
- Socket rail 127mm L
  - Rail with 4 PC. 1/2" drive clips

	Contents	
4136PR	4036 M6 M8 M10 M12	8740504

kg	
0.46	2 / 40

Extension Bar Set

4104 PR

- 4 PC. 1/2" drive extension bar set

	Contents
4104PR	4251 3" 5" 6" 10"

kg	
0.84	1 / 25

Socket & Bit Socket Set

4208 MR SR
4308 MR

- 8 PC. 1/2" drive deep socket set

	Contents
4208MR	4230M — 12 13 14 17 19 21 22 23
4308MR	4235M
4208SR	4230S — 1/2 9/16 5/8 11/16 3/4 13/16 7/8 15/16

4208MR / 4308MR

4208SR

kg		Metal case size (mm)
1.93	12	246 x 103 x 38 (0.034 cuft)

4215 MR

- 15 PC. 1/2" drive deep socket set

	Contents
4215MR	4230M — 10 11 12 13 14 15 16 17 19 21 22 24 27 30 32

kg		Metal case size (mm)
3.80	6	445 x 135 x 50 (0.107 cuft)

4315 MR

- 15 PC. 1/2" drive deep socket set

	Contents
4315MR	4235M — 10 11 12 13 14 15 16 17 19 21 22 24 27 30 32

kg		Metal case size (mm)
3.80	6	445 x 135 x 50 (0.107 cuft)

4109PR
4119PR

- 9 PC. 1/2" drive torx head bit socket set

	Contents
4109PR	4023 — T20 T25 T27 T30 T40 T45 T50 T55 T60
4119PR	4033

4109PR

4119PR

	kg		Metal case size (mm)
4109PR	1.03	20	198 x 105 x 32 (0.023 cuft)
4119PR	1.38		

4110PR
4120PR

- 9 PC. 1/2" drive hexagon head bit socket set

	Contents
4110PR	4025 — 3 4 5 6 7 8 10 12 14
4120PR	4035 — 4 5 6 7 8 10 12 14 17

4110PR

4120PR

	kg		Metal case size (mm)
4110PR	1.03	20	198 x 105 x 32 (0.023 cuft)
4120PR	1.38		

Socket & Wrench Set

4128 PR

- 8 PC. 1/2" drive spline socket set

Contents	
4128PR	4026 M5 M6 M8 M10 402B M16 4036 M8 M10 M12

kg		Metal case size (mm)
1.24	18	244 x 118 x 37 (0.038 cuft)

4220 MR
4320 MR

- 20 PC. 1/2" drive socket wrench set

Contents		
4220MR	4330M: 8 9 10 11 12 13 14 15 16 17 18 19 21 22 24 27	4755-10G, 4251-05, 4251-10, 4791
4320MR	4335M	

kg		Metal case size (mm)
3.83	6	445 x 135 x 50 (0.107 cuft)

4322 MR

- 24 PC. 1/2" drive socket wrench set

Contents		
4322MR	4335M: 10 11 12 13 14 15 17 19 22 24 27 30 4025: 4 5 6 7 8 10 12 14	4755-10G, 4251-05, 4251-10, 4791

kg		Metal case size (mm)
5.30	4	445 x 187 x 50 (0.147 cuft)

4325 MR

- 24 PC. 1/2" drive socket wrench set

Contents		
4325MR	4335M: 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 27 30 32	4779-10G, 4572-10, 4311-16G, 4251-05, 4251-10, 4791

kg		Metal case size (mm)
5.01	4	445 x 187 x 50 (0.147 cuft)

Socket Set

4501 MR

- 15 PC. 1/2" drive socket wrench set

	Contents
4501MR	○ 4335M: 8 10 11 12 13 14 17 19 21 22 24 27
	4779-10F, 4452-15F, 4251-05

kg		Metal case size (mm)
3.40	6	392 x 90 x 50 (0.062 cuft)

4012 MR SR
4512 MR SR

- 14 PC. 1/2" drive socket wrench set

	Contents		
4012MR	○ 4330M	10 11 12 13 14 17 19 21 22 24	○ 463021
4512MR	○ 4335M		○ 463521
4012SR	○ 4330S	3/8 7/16 15/32 1/2 9/16 11/16 3/4 13/16 7/8 15/16	○ 463021
4512SR	○ 4335S		○ 463521
	4768-10F, 4251-05, 4572-12		

4012MR / 4512MR

4012SR/4512SR

kg		Metal case size (mm)
3.50	6	445 x 135 x 50 (0.107 cuft)

4024 MR SR
4524 MR SR
4033 MR SR
4533 MR SR

- 24 PC. 1/2" drive socket wrench set

	Contents		
4024MR	○ 4330M		○ 463021
4524MR	○ 4335M	10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 27 30 32	○ 463521
4033MR	○ 4330M		○ 463021
4533MR	○ 4335M		○ 463521
4024SR	○ 4330S	3/8 7/16 15/32 1/2 9/16 19/32 5/8 11/16 3/4 25/32 13/16 7/8 15/16 1 1-1/16 1-1/8 1-3/16 1-1/4	○ 463021
4524SR	○ 4335S		○ 463521
4033SR	○ 4330S	5/16 3/8 7/16 15/32 1/2 9/16 19/32 5/8 11/16 3/4 25/32 13/16 7/8 15/16 1 1-1/16 1-3/16 1-1/4	○ 463021
4533SR	○ 4335S		○ 463521
	4725-12B, 4779-10B		4121-11GR, 4223-02, 4573-10, 4583-12

4033MR / 4533MR

4024SR / 4524SR

kg		Metal case size (mm)
5.7	4	445 x 187 x 50 (0.147 cuft)

Socket Set

4044 CR
4544 CR

- 43 PC. 1/2" drive socket wrench set

Contents			
4044CR	○ 4330M	8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 30 32	4779-10B, 4121-11G, 4223-02, 4573-10, 4583-12, 4791
	○ 4330S	3/8 7/16 1/2 9/16 5/8 11/16 3/4 13/16 7/8 15/16 1 1-1/8 1-3/16 1-1/4	
4544CR	○ 4335M	8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 30 32	
	○ 4335S	3/8 7/16 1/2 9/16 5/8 11/16 3/4 13/16 7/8 15/16 1 1-1/8 1-3/16 1-1/4	

4044CR / 4544CR

kg		Metal case size (mm)
8.5	2	476 x 282 x 57 (0.27 cuft)

4026 MR SR
4026 MR 03
4026 SR 03
4026 MR 04
4526 MR SR
4526 MR 03
4526 SR 03
4526 MR 04

- 24 PC. 1/2" drive socket wrench set

Contents				
4026MR 4526MR	○ 4330M ○ 4335M	10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 27 30 32	○ 463021 ○ 463521	4768-10F
4026MR03 4526MR03 4026MR04 4526MR04	○ 4330M ○ 4335M ○ 4330M ○ 4335M	8 10 11 13 14 15 16 17 18 19 20 21 22 23 24 27 30 32	4791 4791 4791 4791	4779-10G 4755-10G 4572-12 4452-15F
4026SR 4526SR 4026SR03 4526SR03	○ 4330S ○ 4335S ○ 4330S ○ 4335S	5/16 3/8 7/16 15/32 1/2 9/16 19/32 5/8 11/16 3/4 25/32 13/16 7/8 15/16 1 1-1/16 1-3/16 1-1/4	○ 463021 ○ 463521 4791 4791	4768-10F 4779-10G 4251-05 4251-10

4026MR / 4526MR

4026SR / 4526SR

4026MR03 / 4526MR03

4026MR04 / 4526MR04

kg		Metal case size (mm)
5.95	4	445 x 187 x 50 (0.147 cuft)

Socket Set

4032 MR SR
4532 MR SR

- 24 PC. 1/2" drive socket wrench set

Contents				
4032MR	4330M	10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 27 30 32	463021	4779-10F 4452-15F 4251-05 4251-10 4791
4532MR	4335M		463521	
4032SR	4330S	5/16 3/8 7/16 15/32 1/2 9/16 19/32 5/8 11/16 3/4 25/32 13/16 7/8 15/16 1 1-1/16 1-3/16 1-1/4	463021	
4532SR	4335S		463521	

4032MR / 4532MR

4032SR / 4532SR

kg		Metal case size (mm)
5.6	4	445 x 187 x 50 (0.147 cuft)

4028 MR SR
4528 MR SR
4028 MR 02
4528 MR 02

- 24 PC. 1/2" drive socket wrench set

Contents					
4028MR	4330M	10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 27 30 32	463021	4779-10G	4572-10 4251-05 4251-10 4791
4528MR	4335M		463521		
4028MR02	4330M		463021	4755-10G	
4528MR02	4335M		463521		
4028SR	4330S	3/8 7/16 15/32 1/2 9/16 19/32 5/8 11/16 3/4 25/32 13/16 7/8 15/16 1 1-1/16 1-1/8 1-3/16 1-1/4	463021	4779-10G	
4528SR	4335S		463521		

4028MR / 4528MR

4028SR / 4528SR

kg		Metal case size (mm)
5.3	4	445 x 187 x 50 (0.147 cuft)

Socket Set

4042 CR / CR02
4542 CR / CR02

- 42 PC. 1/2" drive socket wrench set

Contents				
4042CR	○ 4330M ○ 4330S 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 27 30 32	○ 463021	4768-10F	4452-18F
4542CR	○ 4335M ○ 4335S	○ 463521		4572-12
4042CR02	○ 4330M ○ 4330S 5/16 3/8 7/16 1/2 9/16 19/32 5/8 11/16 3/4 25/32 13/16 7/8 15/16 1 1-1/16 1-1/8 1-3/16 1-1/4		4779-10G 4791	4251-05 4251-10
4542CR02	○ 4335M ○ 4335S			

4042CR / 4542CR

4042CR02 / 4542CR02

kg		Metal case size (mm)
8.5	2	476 x 282 x 57 (0.27 cuft)

4034 MR
4534 MR

- 33 PC. 1/2" drive socket wrench set

Contents				
4034MR	○ 4330M 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 32	○ 463021	○ 463516 4791 4251-03 4251-05 4251-10	4779-10F 4452-18F 4572-12
4534MR	○ 4335M	○ 463521		

4034MR / 4534MR

kg		Metal case size (mm)
8.2	2	476 x 282 x 57 (0.27 cuft)

41026 MR (25 PC.) SR (25 PC.)
41526 MR (25 PC.) SR (25 PC.)

- 25 PC. 1/2" drive socket wrench set

Contents			
41026MR	○ 4330M 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 27 30 32	○ 463021	4768-10F 4452-15F 4251-05 4251-10 4572-12 4791
41526MR	○ 4335M	○ 463521	
41026SR	○ 4330S 5/16 3/8 7/16 15/32 1/2 9/16 19/32 5/8 11/16 3/4 25/32 13/16 7/8 15/16 1 1-1/16 1-3/16 1-1/4	○ 463021	
41526SR	○ 4335S	○ 463521	

41026MR / 41026SR

41526MR / 41526SR

kg		Plastic case size (mm)
5.7	1	445 x 240 x 206 (0.79 cuft)

Impact Driver Set

4108 FR
4111 FR
4112 FR

- 1/2" drive impact driver set

	PC	Contents
4108FR	8	⊖ 1836S 9 11 ⊕ 1836P 2 3 ⊕ 1880P 2 3
4111FR	6	⊖ 1880S 8 10 ⊕ 1880P 2 3
4112FR	6	⊖ 1836S 9 11 ⊕ 1836P 2 3

4112

414810S

4112

414810S

4108FR

4112FR

	kg		Metal case size (mm)
4108FR	1.04	24	190 x 60 x 48 (0.019 cuft)
4111FR	1.00		
4112FR	1.00		

4505 MR
4505 SR

- 10 PC. 1/2" drive impact driver & socket set

	Contents		
4505MR	○ 4335M 8 10 12 14	⊖ 1836S 9 11	4112
4505SR	○ 4335S 5/16 3/8 1/2 9/16	⊕ 1836P 2 3	414810S

4505MR

4505SR

	kg		Metal case size (mm)
4505MR	1.56	12	246 x 103 x 38 (0.034 cuft)
4505SR			

Standard Socket

- Chrome vanadium alloy steel, polished, chrome plated.
- 4 ball retaining grooves.

6330 M

- 3/4" drive
- 12 points
- Metric size
- Thin walled design on square driving side
- DIN 3124, ISO 2725-1



KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
633017M	17	26.0	32.7	14	51	187	8 / 96
633019M	19	30.0	32.7	14	51	207	8 / 96
633021M	21	32.0	32.7	16	51	210	8 / 96
633022M	22	33.0	35.7	16	51	209	8 / 96
633023M	23	34.0	35.7	16	51	216	8 / 96
633024M	24	35.0	35.7	17	51	219	8 / 96
633026M	26	35.7	35.0	17	52	243	8 / 96
633027M	27	38.0	36.0	19	52	238	8 / 96
633028M	28	39.0	36.0	19	52	233	8 / 96
633029M	29	40.0	38.0	19	52	261	8 / 96
633030M	30	42.0	38.0	21	54	295	6 / 48
633032M	32	44.0	38.0	23	56	317	6 / 48
633033M	33	46.0	39.0	23	56	351	6 / 48
633034M	34	47.0	42.0	24	57	400	6 / 48
633035M	35	48.0	42.0	25	58	406	6 / 36
633036M	36	50.0	42.0	25	58	434	6 / 36
633038M	38	52.0	45.0	27	60	497	6 / 36
633041M	41	56.0	45.0	29	64	581	4 / 32
633042M	42	57.0	45.0	29	64	591	4 / 32
633046M	46	62.0	48.0	33	68	724	4 / 32
633048M	48	64.0	48.0	34	70	775	2 / 24
633050M	50	68.0	48.0	34	72	889	2 / 24
633054M	54	72.0	50.0	35	75	1070	1 / 20
633055M	55	74.0	50.0	37	76	1115	1 / 20
633058M	58	77.0	50.0	37	78	905	1 / 20
633060M	60	80.0	50.0	40	78	1250	1 / 20
633063M	63	83.0	55.0	40	81	1445	1 / 18
633065M	65	85.0	58.0	43	83	1565	1 / 18
633070M	70	92.0	58.0	46	88	1875	1 / 18

6330 S

- 3/4" drive
- 12 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.1



KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
633022S	11/16	26	35.7	14	50.8	195	8 / 96
633024S	3/4	30	35.7	14	50.8	225	8 / 96
633026S	13/16	32	35.7	16	50.8	228	8 / 96
633028S	7/8	33	35.7	16	51.0	230	8 / 96
633030S	15/16	35	35.7	17	51.0	240	8 / 96
633032S	1	35	35.7	17	52.0	242	8 / 96
633034S	1-1/16	38	36.0	19	52.0	238	8 / 96
633036S	1-1/8	40	38.0	19	52.0	261	8 / 96
633038S	1-3/16	42	38.0	21	54.0	295	6 / 48
633040S	1-1/4	44	38.0	23	56.0	317	6 / 48
633042S	1-5/16	46	39.0	23	56.0	351	6 / 48
633044S	1-3/8	48	42.0	25	58.0	406	6 / 36
633046S	1-7/16	50	42.0	25	58.0	434	6 / 36
633048S	1-1/2	52	45.0	27	60.0	497	6 / 36
633050S	1-9/16	54	45.0	28	62.0	537	4 / 32
633052S	1-5/8	56	45.0	29	64.0	581	4 / 32
633054S	1-11/16	58	45.0	29	65.0	591	4 / 32
633056S	1-3/4	60	48.0	31	66.0	657	4 / 32
633058S	1-13/16	62	48.0	34	68.0	724	4 / 32
633060S	1-7/8	64	48.0	34	70.0	775	2 / 24
633062S	1-15/16	66	48.0	34	70.0	832	2 / 24
633064S	2	68	48.0	34	72.0	889	2 / 24
633066S	2-1/16	70	50.0	35	74.0	950	1 / 20
633068S	2-1/8	72	50.0	35	75.0	1020	1 / 20
633070S	2-3/16	74	50.0	37	76.0	1120	1 / 20
633072S	2-1/4	76	50.0	37	76.0	1120	1 / 20
633074S	2-5/16	78	50.0	37	78.0	1160	1 / 20
633076S	2-3/8	80	50.0	40	78.0	1240	1 / 20
633078S	2-7/16	82	55.0	40	81.0	1366	1 / 12
633080S	2-1/2	84	55.0	40	81.0	1460	1 / 12
633082S	2-9/16	85	58.0	43	83.0	1510	1 / 12
633084S	2-5/8	86	58.0	43	83.0	1510	1 / 12
633086S	2-11/16	90	58.0	43	85.0	1555	1 / 12
633088S	2-3/4	92	58.0	46	88.0	1865	1 / 12

Standard Socket

- Chrome vanadium alloy steel, polished, chrome plated.
- 4 ball retaining grooves.

6335 M

- 3/4" drive
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3124, ISO 2725-1

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
633517M	17	26.0	32.7	14	51	187	8 / 96
633518M	18	28.0	32.7	14	51	196	8 / 96
633519M	19	30.0	32.7	14	51	207	8 / 96
633520M	20	31.0	32.7	16	51	209	8 / 96
633521M	21	32.0	32.7	16	51	210	8 / 96
633522M	22	33.0	35.7	16	51	209	8 / 96
633523M	23	34.0	35.7	16	51	216	8 / 96
633524M	24	35.0	35.7	17	51	219	8 / 96
633525M	25	35.0	35.7	17	52	240	8 / 96
633526M	26	35.7	35.0	17	52	243	8 / 96
633527M	27	38.0	36.0	19	52	238	8 / 96
633528M	28	39.0	36.0	19	52	233	8 / 96
633529M	29	40.0	38.0	19	52	261	8 / 96
633530M	30	42.0	38.0	21	54	295	6 / 48
633531M	31	43.0	38.0	23	55	305	6 / 48
633532M	32	44.0	38.0	23	56	317	6 / 48
633533M	33	46.0	39.0	23	56	351	6 / 48
633534M	34	47.0	42.0	24	57	400	6 / 48
633535M	35	48.0	42.0	25	58	406	6 / 36
633536M	36	50.0	42.0	25	58	434	6 / 36
633537M	37	51.0	45.0	25	59	485	6 / 36
633538M	38	52.0	45.0	27	60	497	6 / 36
633539M	39	53.0	45.0	28	61	520	4 / 32
633540M	40	54.0	45.0	28	62	540	4 / 32
633541M	41	56.0	45.0	29	64	581	4 / 32
633542M	42	57.0	45.0	29	64	591	4 / 32
633543M	43	58.0	45.0	29	65	620	4 / 32
633544M	44	60.0	48.0	31	66	695	4 / 32
633545M	45	61.0	48.0	33	67	715	4 / 32
633546M	46	62.0	48.0	33	68	724	4 / 32
633547M	47	63.0	48.0	33	69	755	4 / 32
633548M	48	64.0	48.0	34	70	775	2 / 24
633549M	49	66.0	48.0	34	70	810	2 / 24
633550M	50	68.0	48.0	34	72	889	2 / 24
633551M	51	69.0	50.0	35	73	895	1 / 20
633552M	52	69.0	50.0	35	73	905	1 / 20
633553M	53	70.0	50.0	35	74	975	1 / 20
633554M	54	72.0	50.0	35	75	1010	1 / 20
633555M	55	74.0	50.0	37	76	1095	1 / 20
633556M	56	75.0	50.0	37	76	1145	1 / 20
633557M	57	76.0	50.0	37	76	1195	1 / 20
633558M	58	77.0	50.0	37	78	1225	1 / 20
633559M	59	78.0	50.0	37	78	1250	1 / 20
633560M	60	80.0	50.0	40	78	1275	1 / 20
633563M	63	83.0	55.0	40	81	1390	1 / 12
633565M	65	85.0	58.0	43	83	1510	1 / 12
633570M	70	92.0	58.0	46	88	1805	1 / 12

6335M



Deep Socket

- Chrome vanadium alloy steel, polished, chrome plated.
- 4 ball retaining grooves.

6235 M

- 3/4" drive
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3124, ISO 2725-1

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
623517M	17	26.0	32.7	20	90	388	2 / 48
623518M	18	28.0	32.7	20	90	411	2 / 48
623519M	19	30.0	32.7	20	90	437	2 / 48
623520M	20	31.0	32.7	22	90	440	2 / 48
623521M	21	32.0	32.7	22	90	444	2 / 48
623522M	22	33.0	35.7	22	90	460	2 / 48
623523M	23	34.0	35.7	24	90	462	2 / 48
623524M	24	35.0	35.7	24	90	477	2 / 48
623525M	25	35.0	35.7	25	90	464	2 / 48
623526M	26	35.7	35.0	25	90	433	1 / 24
623527M	27	38.0	36.0	28	90	431	1 / 24
623528M	28	39.0	36.0	28	90	477	1 / 24
623529M	29	40.0	38.0	28	90	502	1 / 24
623530M	30	42.0	38.0	31	90	584	1 / 24
623531M	31	43.0	38.0	34	90	580	1 / 24
623532M	32	44.0	38.0	34	90	580	1 / 24
623533M	33	46.0	39.0	34	90	646	1 / 24
623534M	34	47.0	42.0	34	90	717	1 / 24
623535M	35	48.0	42.0	37	90	677	1 / 24
623536M	36	50.0	42.0	37	90	724	1 / 24
623537M	37	51.0	45.0	37	90	891	1 / 24
623538M	38	52.0	45.0	41	90	913	1 / 24
623539M	39	53.0	45.0	41	90	935	1 / 24
623540M	40	54.0	45.0	41	90	911	1 / 24
623541M	41	56.0	45.0	41	90	864	1 / 24
623542M	42	57.0	45.0	46	95	913	1 / 24
623543M	43	58.0	45.0	46	95	971	1 / 10
623544M	44	60.0	48.0	46	95	1066	1 / 10
623545M	45	61.0	48.0	46	95	1073	1 / 10
623546M	46	62.0	48.0	46	95	1093	1 / 10
623547M	47	63.0	48.0	46	95	1102	1 / 10
623548M	48	64.0	48.0	50	95	1093	1 / 10
623549M	49	66.0	48.0	50	95	1035	1 / 10
623550M	50	68.0	48.0	50	95	1220	1 / 10
623551M	51	69.0	50.0	50	95	1282	1 / 10
623552M	52	69.0	50.0	50	95	1244	1 / 10
623553M	53	70.0	50.0	50	95	1262	1 / 10
623554M	54	72.0	50.0	50	95	1342	1 / 10
623555M	55	74.0	50.0	50	95	1153	1 / 10
623556M	56	75.0	50.0	50	95	1440	1 / 10
623557M	57	76.0	50.0	52	100	1555	1 / 10
623558M	58	78.0	50.0	52	100	1540	1 / 10
623559M	59	78.0	50.0	52	100	1604	1 / 10
623560M	60	80.0	50.0	53	100	1662	1 / 10



Ratchet & Accessory

- Chrome vanadium alloy steel, polished, chrome plated.
- 4 ball retaining grooves.

6779 DIN 3122

- 3/4" drive reversible ratchet
- 15° gear action degree (24 teeth)

KING TONY	Overall (inch)	Length (mm)	g	/
6779-20F	20	500	2349	1 / 6
6779DK	renewal kits		-	-

6779-20F

6779DK

8781032KT

6251 DIN 3123

- 3/4" drive extension bars

KING TONY	Overall (inch)	Length (mm)	g	/
6251-04	4	110	400	4 / 40
6251-08	8	200	732	2 / 20
6251-16	16	400	1362	1 / 10



6251

8776KT

6452 DIN 3122

- 3/4" drive flexible handle
- Action degree -180°

KING TONY	Overall (inch)	Length (mm)	g	/
6452-18F	18	450	1717	1 / 10
6452-30F	30	750	2813	1 / 8
6452DK	renewal kits		-	-

6452-18F

6452DK

8781032KT

6572 DIN 3122

- 3/4" drive sliding T-handle

KING TONY	Overall (inch)	Length (mm)	g	/
6572-20	20	500	1542	1 / 10
6572DK	renewal kits		-	-

6572-20

6572DK

8781032KT

6581 DIN 3122

- 3/4" drive 90° L-handles

KING TONY	Overall (inch)	Length (mm)	g	
6581-12	12	300	1307	10
6581-18	18	450	1850	12

6581

6791 DIN 3123, ISO 3316

- 3/4" drive universal joint

KING TONY	Overall (inch)	Length (mm)	g	/
6791	4-1/4	108	590	2 / 20

6791

8776KT

6814 6818 DIN 3123, ISO 3316

- 3/4" drive adapters
- Converting to 1/2" drive or 1" drive
- 6814 → Max. torque 620 Nm

KING TONY	SPEC.	g	/
6814	3/4"F x 1/2"M	131	8 / 96
6818	3/4"F x 1"M	304	6 / 60

1/2" drive(M)
1" drive(M)

← 3/4" drive(F)

6814 / 6818

8776KT

Socket Set

6016 MR SR
6316 MR

- 16 PC. 3/4" drive socket wrench set

Contents		
6016MR	6330M: 21 22 23 24 27 30 32 36 38 41 46 50	6779-20F
6316MR	6335M: 6251-08, 6251-16	
6016SR	6330S: 7/8 15/16 1 1-1/16 1-1/8 1-1/4 1-3/8 1-1/2 1-5/8 1-3/4 1-7/8 2	6572-20

kg		Metal case size (mm)
14.0	1	537 x 177 x 78 (0.26 cuft)

6023 MR SR
6323 MR

- 23 PC. 3/4" drive socket wrench set

Contents		
6023MR	6330M: 21 22 23 24 26 27 28 29 30 32 34 35 36 38 41 46 50	6779-20F
6323MR	6335M:	6251-04, 6251-08, 6251-16
6023SR	6330S: 7/8 15/16 1 1-1/16 1-1/8 1-3/16 1-1/4 1-5/16 1-3/8 1-7/16 1-1/2 1-9/16 1-5/8 1-3/4 1-13/16 1-7/8 2	6572-20, 6791

kg		Metal case size (mm)
17.1	1	537 x 177 x 78 (0.26 cuft)

6224 CR

- 24 PC. 3/4" drive socket wrench set

Contents		
6224CR	6330M: 22 24 27 30 32 36 38 41 46 50	6779-20F
	6330S: 1 1-1/8 1-1/4 1-5/16 1-3/8 1-7/16 1-1/2 1-5/8 1-3/4 2	6251-08, 6251-16, 6572-20

kg		Metal case size (mm)
15.5	1	537 x 177 x 78 (0.26 cuft)

6226 CR

- 26 PC. 3/4" drive socket wrench set

Contents		
6226CR	6330M: 22 24 27 30 32 36 38 41 46 50	6452-18F
	6330S: 7/8 15/16 1 1-1/8 1-3/16 1-5/16 1-3/8 1-7/16 1-5/8 1-3/4 1-7/8 2	6251-04, 6251-08, 6572-20

kg		Metal case size (mm)
17.5	1	537 x 177 x 78 (0.26 cuft)

Standard Socket

- Chrome vanadium alloy steel, polished, chrome plated.
- 4 ball retaining grooves.

8330 M

- 1" drive
- 12 points
- Metric size
- Thin walled design on square driving side
- DIN 3124, ISO 2725-1

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
833036M	36	52	48	26	65	449	1 / 24
833038M	38	54	48	26	65	478	1 / 24
833041M	41	58	50	29	70	557	1 / 24
833046M	46	65	54	32	75	849	1 / 10
833050M	50	70	54	34	75	996	1 / 10
833054M	54	74	57	38	80	1145	1 / 10
833055M	55	76	57	42	83	1206	1 / 12
833058M	58	79	57	42	83	1263	1 / 12
833060M	60	82	58	46	87	1470	1 / 12
833063M	63	86	58	46	87	1555	1 / 12
833065M	65	88	65	49	90	1670	1 / 12
833067M	67	91	70	49	91	1670	1 / 12
833070M	70	94	70	50	93	2100	1 / 8
833071M	71	95	70	50	93	2068	1 / 8
833075M	75	100	70	50	95	2310	1 / 8
833077M	77	103	80	52	100	2557	1 / 8
833080M	80	107	80	52	100	2580	1 / 8



8330 S

- 1" drive
- 12 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.1

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
833046S	1-7/16	52	48	26	65	463	1 / 24
833048S	1-1/2	54	48	26	65	489	1 / 24
833054S	1-11/16	60	54	29	70	680	1 / 24
833060S	1-7/8	67	54	34	75	976	1 / 10
833064S	2	71	54	34	75	988	1 / 10
833072S	2-1/4	78	57	42	83	1212	1 / 12
833076S	2-3/8	82	58	46	87	1437	1 / 12
833084S	2-5/8	90	65	49	90	1693	1 / 12
833094S	2-15/16	100	70	52	95	2242	1 / 8
8330A0S	3-1/8	107	80	52	100	2578	1 / 8



Ratchet

8779 DIN 3122

- 1" drive reversible ratchets
- 15° gear action degree (24 teeth)

KING TONY	Total (inch)	Length (mm)	g	
8779-32F	32	800	4400	5
8779DK	renewal kits		-	-

8779-32F

8779DK

Accessory

- Chrome vanadium handle, chrome molybdenum driver
- Chrome plated handle & black phosphate sunk driver

8251 DIN 3123

- 1" drive extension bar

KING TONY	Total (inch)	Length (mm)	g	
8251-08	8	200	1350	1 / 16
8251-16	16	400	2480	1 / 8

8572 DIN 3122

- 1" drive sliding T-handle

KING TONY	Total (inch)	Length (mm)	g	
8572-25	25	630	4200	1 / 6
8572DK	renewal kits		-	-

8572-25

8572DK

8581 DIN 3122

- 1" drive 90° L-handle

KING TONY	Total (inch)	Length (mm)	g	
8581-26	26	650	5120	1/4

8816 DIN 3123, ISO 3316

- 1" drive adapter
- Converting to 3/4" drive
- Max. torque 1800 Nm

KING TONY	SPEC.	g	
8816	1"F x 3/4"M	330	6 / 48

3/4" drive(M)

1" drive(F)

8816

Socket Set

8015 MR SR

- 14 PC. 1" drive socket wrench set

	Contents	
8015MR	○ 8330M: 36 41 46 50 55 60 65 70 75 80	8779-32F 8251-08 8251-16
8015SR	○ 8330S: 1-7/16 1-1/2 1-11/16 1-7/8 2 2-1/4 2-3/8 2-5/8 2-15/16 3-1/8	8572-25

kg		Metal case size (mm)
34.1	1	660 x 205 x 108 (0.52 cuft)

Socket Set

5022 MR SR
5522 MR

- 21 PC. 1/4" + 3/8" drive combination socket set

Contents				
5022MR	3330M: 10 11 12 13 14 17 19	2335M: 4 5 5.5 6 7 8 9	363021	3769-08F, 3221-03, 3221-06, 3812, 363516, 2178AE
5522MR	3335M: 10 11 12 13 14 17 19		363521	
5022SR	2335S: 5/32 3/16 7/32 1/4 9/32 5/16 11/32		363021	
	3330S: 3/8 7/16 15/32 1/2 9/16 11/16 3/4			

5022MR / 5522MR　　5022SR

kg		Metal case size (mm)
1.60	10	285 x 130 x 45 (0.059 cuft)

5039 CR

- 39 PC. 1/4" + 3/8" drive combination socket set

Contents			
5039CR	2335M: 4.5 5 6 7 8 9 10 11 12	2335S: 3/16 7/32 1/4 9/32 5/16 11/32 3/8 7/16 1/2	3330M: 9 10 11 12 13 14 16 17 19	3330S: 3/8 7/16 1/2 9/16 5/8 11/16 3/4	363021, 3769-08F, 3221-03, 3812, 2178AE

kg		Metal case size (mm)
2.60	10	318 x 147 x 46 (0.076 cuft)

7120PR
7120PR01

- 20 PC. 3/8" + 1/2" drive special purpose socket set

Contents			
7120PR	3375: E6 E7 E8 E10	4375: E12 E14 E16 E18 E20	4023: T30 T40 T45 T50 T55	4813
7120PR01	3023: T10 T15 T20 T25 T27		4027: T30 T40 T45 T50 T55	

kg		Metal case size (mm)
2.1	10	296 x 130 x 41 (0.056 cuft)

Socket Set

7558 MR

- 58 PC. 1/4" + 1/2" drive combination socket set

	Contents	
7558MR	2335M: 4 4.5 5 5.5 6 7 8 9 10 11 12 13 14	2792, 4791, 2221-02, 2221-04, 4251-05, 2779-55G, 4779-10G, 2141, 2178AE
	4335M: 8 10 11 12 13 14 15 16 17 18 19 21 22 24	
	1025P: PH1 PH2 PH3	
	1025S: 4 6 8	
	1025Z: PZ1 PZ2 PZ3	
	1025H: H3 H4 H5 H6 H7 H8	
	1025U: T10 T15 T20 T25 T27 T30 T40	

kg		Metal case size (mm)
3.8	1 / 4	445 x 187 x 50 (0.147 cuft)

9033 CR

- 135 PC. 1/4" + 3/8" + 1/2" drive combination socket set

	Contents	
9033CR	2335M: 4 4.5 5 5.5 6 7 8 9 10 11 12 13	463516, 463021, 3769-08F, 4768-10F, 2178AE, 2221-02, 2221-04, 2452-05F, 2571-45, 3221-03, 3221-06, 3792, 3812, 4251-05, 4251-10, 4572-10, 4791
	2335S: 5/32 3/16 7/32 1/4 9/32 5/16 11/32 3/8 7/16 1/2	
	2235M: 4 4.5 5 5.5 6 7 8 9 10 11 12 13	
	2235S: 5/32 3/16 7/32 1/4 9/32 5/16 11/32 3/8 7/16 1/2	
	3330M: 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22	
	4330M: 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 30 32	
	4330S: 3/8 7/16 1/2 9/16 5/8 11/16 3/4 13/16 7/8 15/16 1 1-1/8 1-3/16 1-1/4	
	2015M: 3 4 5 6 8 10	
	2015S: 1/8 3/16 7/32 1/4 5/16 3/8	
	2011: No. 1 2 3 4	
	1115-03: 1.5 2 2.5	
	2561: cross bar. 4-1/2"L	
	3840: 3/8" drive spin disc.	
	4840: 1/2" drive spin disc.	

kg		Metal case size (mm)
12.3	2	450 x 370 x 56 (0.329 cuft)

Socket & Wrench Set

9063 MR / MR01
9563 MR / MR01

- 62 PC. 1/4" + 3/8" + 1/2" drive socket wrench set

Contents					
9063MR	4330M: 12 13 14 15 16 17 18 19 20 21 22 23 24 27 30 32 3330M: 12 13 14 15 16 17 18 19 20 21 22 23 24 27 30 32	363021	4768-10F 3769-08F	2335M: 4 4.5 5 6 7 8 9 10 11 12 3023: T20 T25 T27 T30 T40 3025: 4 5 6 8 10	4251-06 4572-12 4791 3221-06 3571-08 3792 3812 2221-04 2571-45
9563MR	4335M: 12 13 14 15 16 17 18 19 20 21 22 23 24 27 30 32 3335M: 12 13 14 15 16 17 18 19 20 21 22 23 24 27 30 32	363521	3235M: 12 14 17 19		
9063MR01	4330M: 8 9 10 11 12 13 14 15 17 19 3330M: 8 9 10 11 12 13 14 15 17 19	363021	4755-10G 3779-08G		
9563MR01	4335M: 8 9 10 11 12 13 14 15 17 19 3335M: 8 9 10 11 12 13 14 15 17 19	363521	3235M: 10 13 17 19		

9063MR / 9563MR

9063MR01 / 9563MR01

kg		Metal case size (mm)
7.4	2	476 x 282 x 57 (0.27 cuft)

7075 MR
7075 MR01

- 75 PC. 1/4" + 1/2" drive combination socket set

Contents			
7075MR	2235M: 8 10 12 13 2335M: 4 4.5 5 5.5 6 7 8 9 10 11 12 13 4330M: 10 12 13 14 15 17 18 19 22 24 27 30 1060: 8 10 12 13 14 15 17 18 19	463516 463521 4791 2792 4223-05 2141	2571-45
7075MR01	1421: No.1 x 80 No.2 x 100 1422: 4 x 100 6.5 x 100 1025T: T9 T20 T27 T30 T40 1025H: H1.5 H2.5 H7 H8 H10 1145: 1.5 2 2.5 3 4 5 6 7 8	6511-10A 2221-04 4779-10B 6111-06A 2178 4121-11G 7821-30 4583-12	2779-55G

7075MR

7075MR01

	kg		Blow case size (mm)
7075MR	7.9	2	475 x 360 x 90 (0.56 cuft)
7075MR01	7.9		

Socket & Wrench Set

7572 MR

- 72 PC. 1/4" + 1/2" drive combination socket set

Contents		
7572MR	2235M 8 10 12 13	463516
	2335M 4 4.5 5 5.5 6 7 8 9 10	463521
	4335M 10 12 13 14 15 17 18 19 22 24	4791, 2178AE
	1060 8 10 12 13 14 15 17 19	2571-45, 2221-04
	1145 1.5 2 2.5 3 4 5 6 7 8 10	2141, 4251-05
	1025P PH0 PH1 PH2 PH3	4581-10
	1025H 3 4 5 6 7 8	4779-10G
	1025S 4 5.5 7	
	1025T T10 T15 T20 T25 T27 T30 T40	6114-05

kg		Blow case size (mm)
4.96	4	410 x 280 x 60 (0.247 cuft)

7085 MR

- 85 PC. 1/4" + 1/2" drive combination socket set

Contents		
7085MR	2235M 7 8 10 12 13	463516
	2335M 5 5.5 6 7 8 10 11 12 13	463521
	4330M 10 12 13 14 15 17 18 19 22 24 27 30	414810M, 2792
	1060 8 10 12 13 14 15 17 18 19 22	4791, 2211-06
	1130 3 4 5 6 8 10 2.5	
	1147 T10 T15 T20 T25 T27 T30 T40	2452-05F, 2779-55G
	1421 No.1 x 80 No.2 x 100	4779-10G, 4251-05
	1422 4 x 100 5.5 x 100	4452-15F
	1636H H5 H6 H7 H8 H10 H12	6516-10C
	1636M 6 8 10 12	
	1636T T30 T40 T45 T50 T55 T60	6231-07A, 6111-06A
	19961721 17 19 13/16" 1/2" x 300mm	

kg		Blow case size (mm)
9.20	2	475 x 360 x 90 (0.553 cuft)

Socket & Wrench Set

7597 MR

- 97 PC. 1/4" + 1/2" drive combination socket set

Contents		
7597MR	2235M	7 8 10 12 13
	2335M	4 4.5 5 5.5 6 7 8 9 10 11 12 13
	4335M	10 12 13 14 15 16 17 18 19 21 22 24 27 30 32
	1060	6 7 8 10 12 13 14 15 16 17 18 19
	1421	No.2 x 38
	1422	4 x 100 6.5 x 35
	1461	No.2 x 100 No.3 x 150
	1462	6.5 x 150
	1025P	PH0 PH1 PH2 PH3
	1025H	H1.5 H2 H2.5 H3 H4 H5 H6 H7 H8 H10
	1025S	4 5.5 7 8
	1025U	T8 T10 T15 T20 T25 T27 T30 T40
	1025Z	PZ1 PZ2 PZ3
	463516	
	463521	
	2141	
	2792	
	2571-45	
	2221-02 2221-04	
	2452-05F	
	2779-55G	
	4251-10	
	4121-11G	
	4791	
	4223-02	
	4583-12	
	4573-10	
	4779-10B	
	6111-06A	
	6511-10A	

kg		Blow case size (mm)
9.2	2	445 x 440 x 50 (0.147 cuft)

9507 MR

- 107 PC. 1/4" + 3/8" + 1/2" drive combination socket set

Contents		
9507MR	2335M	4 4.5 5 5.5 6 7 8 9 10
	3330M	6 7 8 9 10 12 13 14 15 17
	3375M	E4 E5 E6 E7 E8 E10 E11 E12 E14 E16 E18
	4335M	8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 27 30 32
	1060	8 10 11 12 13 14 15 16 17 18 19 21 22 24
	1930	8 x10 11 x 13 12 x 14 17 x 19
	1422	5.5 x 100
	1461	No.1 x 75 No.2 x 100
	1462	6.5 x 150
	1832H	H3 H4 H5 H6 H7 H8 H10 H12
	1832T	T15 T20 T25 T27 T30 T40 T45 T50
	463516	
	463521	
	2792	
	3792	
	414810S	
	4791	
	2221-03 2221-06	
	3221-03 3221-06	
	4223-02	
	4251-05 4251-10	
	2755-55G	
	3734-10F	
	3611-08R	
	4452-15F	
	4779-10G	
	6111-06A	

kg		Blow case size (mm)
10.7	2	445 x 440 x 50 (0.147 cuft)

Socket Rail Set

7112 PR

- 12 PC. 3/8" + 1/2" drive star socket set
- Socket rail 260mmL
  - Rail with 6 PC. 1/2" drive & 5 PC. 3/8" drive clips

Contents		
7112PR	3375M: E4 E5 E6 E8	3571-08, 3814, 8771011
	4375M: E10 E12 E14 E16 E18 E20	

kg	
0.76	24

7113 PR

- 12 PC. 3/8" + 1/2" drive star socket set
- Socket rail 260mmL
  - Rail with 6 PC. 3/8" drive & 6 PC. 1/2" drive clips

Contents		
7113PR	3375M: E4 E5 E6 E7 E8 E11	8771012
	4375M: E10 E12 E14 E16 E18 E20	

kg	
0.6	1 / 32

Tool Bag

92543 MR

Contents		
92543MR	1421: PH0 x 60 PH1 x 100 PH2 x 38 PH2 x 150	
	1422: 3.2 x 75 6.5 x 38 6.5 x 150	
	1025Z: PZ1 PZ2 PZ3	
	1025T: T10 T15 T20 T25 T27 T30 T40	
	2335M: 4 5 6 7 8 9 10 11 12 13 14	
	2792, 20317MR, 2178DF, 3611-08, 2141, 6111-07, 6511-10A, 7976-65, 79083-03C, 870208, 8720	

kg		Tool bag size (mm)
0.8	8	250 x 400 x 30 mm

Impact Socket &

- Impact Standard Socket
- Deep Socket
- Star Socket
- Bit Socket
- Accessory
- Bit Socket Set
- Thin Wall Socket
- Extra Thin Wall Socket
- Universal Joint Socket
- Rear Wheel Socket
- #5 Spline Drive
- Socket Shelf Set

Accessory

Impact Standard Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

2535 M

- 1/4" drive standard length
- 6 points
- Metric size
- DIN 3129 ,ISO 2725-2

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
253504M	4	7.5	13	4	23	12	20 / 600
253545M	4.5	8.1	13	5	23	12	20 / 600
253505M	5	8.8	13	6	23	12	20 / 600
253555M	5.5	9.4	13	6	23	13	20 / 600
253506M	6	10.0	13	7	23	13	20 / 600
253507M	7	11.3	13	7	23	13	20 / 600
253508M	8	12.5	13	8	23	13	20 / 600
253509M	9	13.8	13	8	23	15	12 / 360
253510M	10	15.0	13	9	23	18	12 / 360
253511M	11	16.3	13	9	23	20	12 / 360
253512M	12	17.5	13	9	23	21	12 / 360
253513M	13	18.8	13	9	23	22	12 / 360
253514M	14	19.8	13	9	23	23	10 / 300



3535 M

- 3/8" drive standard length
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3129 ,ISO 2725-2

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
353506M	6	10.6	19	5	32	31	12 / 360
353507M	7	11.8	19	5	32	33	12 / 360
353508M	8	13.2	19	6	32	34	12 / 360
353509M	9	14.5	19	6	32	39	12 / 360
353510M	10	15.5	19	7	32	38	12 / 360
353511M	11	17.0	19	7	32	38	12/ 360
353512M	12	18.2	19	8	32	41	12 / 360
353513M	13	19.4	22	9	32	53	10 / 200
353514M	14	20.7	22	9	32	54	10 / 200
353515M	15	22.0	22	10	32	55	10 / 200
353516M	16	23.8	22	10	32	57	10 / 200
353517M	17	24.8	22	11	32	60	10 / 200
353518M	18	25.8	22	11	32	63	10 / 200
353519M	19	27.6	22	13	32	64	10 / 160



3535 S

- 3/8" drive standard length
- 6 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.2

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
353508S	1/4	10.8	19	5	32	31	12 / 360
353510S	5/16	13.0	19	6	32	34	12 / 360
353512S	3/8	15.3	19	7	32	38	12 / 360
353514S	7/16	17.0	19	7	32	38	12 / 360
353516S	1/2	18.2	19	9	32	53	10 / 200
353518S	9/16	20.7	22	9	32	53	10 / 200
353520S	5/8	23.8	22	10	32	57	10 / 200
353522S	11/16	24.5	22	11	32	60	10 / 200
353524S	3/4	27.0	22	11	32	64	10 / 160



Impact Deep Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

3435 M

- 3/8" drive deep version
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3121

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
343506M	6	10.6	19	10	65	62	6 / 120
343507M	7	11.8	19	10	65	66	6 / 120
343508M	8	13.2	19	12	65	71	6 / 120
343509M	9	14.5	19	12	65	76	6 / 120
343510M	10	15.5	19	12	65	82	6 / 120
343511M	11	17.0	19	13	65	84	6 / 120
343512M	12	18.2	19	14	65	93	6 / 120
343513M	13	19.4	22	14	65	113	6 / 120
343514M	14	20.7	22	14	65	114	6 / 120
343515M	15	22.0	22	16	65	125	6 / 120
343516M	16	23.8	22	16	65	126	6 / 96
343517M	17	24.8	22	17	65	138	6 / 96
343518M	18	25.8	22	18	65	144	6 / 96
343519M	19	27.6	22	20	65	154	6 / 96
343520M	20	28.3	22	20	65	148	6 / 96
343521M	21	29.5	22	22	65	156	6 / 96
343522M	22	30.8	22	22	65	172	5 / 60
343523M	23	32.0	22	24	65	177	5 / 60
343524M	24	32.5	22	24	65	180	5 / 60



3435 S

- 3/8" drive deep version
- 6 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.2

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
343508S	1/4	10.8	19	10	63.5	62	6 / 120
343510S	5/16	13.0	19	12	63.5	71	6 / 120
343512S	3/8	15.3	19	12	63.5	82	6 / 120
343514S	7/16	17.0	19	13	63.5	84	6 / 120
343516S	1/2	18.2	19	14	63.5	113	6 / 120
343518S	9/16	20.7	22	14	65	114	6 / 120
343520S	5/8	23.8	22	16	65	126	6 / 96
343522S	11/16	24.5	22	17	65	138	6 / 96
343524S	3/4	27.0	22	20	65	154	6 / 96
343526S	13/16	29.5	22	22	65	156	6 / 96
343528S	7/8	30.8	22	22	65	172	5 / 60



Impact Star Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

3575 M

- 3/8" drive impact star socket
- For torx external screws
- DIN 3121

KING TONY	SIZE	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
357505M	E5	9.6	19	4.0	32	31	12 / 360
357506M	E6	10.2	19	5.0	32	31	12 / 360
357507M	E7	10.8	19	6.0	32	33	12 / 360
357508M	E8	11.5	19	6.5	32	33	12 / 360
357510M	E10	12.0	19	7.0	32	34	12 / 360
357512M	E12	14.0	19	9.0	32	34	12 / 360
357514M	E14	17.0	19	9.5	32	40	12 / 360



Impact Bit Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

CAUTION

1. Do not over - load.
2. Control the air pressure under 6.3 bar, adjust the suitable torque from 0.

3053

- 3/8" drive impact bit socket
- For torx internal screws
- DIN 3121

KING TONY	SIZE	L (mm)	Max.Torq (Nm)	g	
305310	T10	55	4.52	30	12 / 360
305315	T15	55	7.69	30	12 / 360
305320	T20	55	12.66	32	12 / 360
305325	T25	55	18.99	32	12 / 360
305327	T27	55	26.90	33	12 / 360
305330	T30	55	37.40	34	12 / 360
305340	T40	55	65.08	37	12 / 360
305345	T45	55	103.50	41	12 / 360
305350	T50	55	158.75	44	12 / 360

3055 M

- 3/8" drive impact bit socket
- For hexagon head screws
- DIN 3121

KING TONY	SIZE (mm)	L (mm)	Max.Torq (Nm)	g	
305504M	4	55	20.80	35	12 / 360
305505M	5	55	36.00	38	12 / 360
305506M	6	55	62.40	40	12 / 360
305508M	8	55	144.00	45	12 / 360
305510M	10	55	264.00	50	12 / 360
305512M	12	55	420.00	60	12 / 360

3055 S

- 3/8" drive impact bit socket
- For hexagon head screws
- DIN 3121

KING TONY	SIZE (inch)	L (mm)	Max.Torq (Nm)	g	
305506S	3/16	55	36.0	35	12 / 360
305507S	7/32	55	62.4	38	12 / 360
305508S	1/4	55	93.6	39	12 / 360
305510S	5/16	55	144.0	46	12 / 360
305512S	3/8	55	264.0	53	12 / 360
305516S	1/2	55	518.0	70	12 / 360

3065

- 3/8" drive impact bit socket
- Hexagon head
- DIN 3121

KING TONY	SIZE (mm)	L (mm)	Max.Torq (Nm)	g	
306504	4	90	20.8	42	8 / 160
306505	5	90	36.0	48	8 / 160
306506	6	90	62.4	55	8 / 160
306508	8	90	144.0	73	8 / 160
306510	10	90	264.0	96	8 / 160

Impact Accessory

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

3147

- 3/8"drive bit holder

KING TONY	SIZE	Total Length (mm)	g	
314708S	1/4"	40	44	12 / 384
314710S	5/16"	40	45	12 / 384
314710M	10mm	40	46	12 / 384

3260

- 3/8"drive extension bar
- DIN 3121

KING TONY	Total Length (inch)	(mm)	g	
3260-03	3	75	96	6 / 120
3260-06	6	150	168	5 / 100

3260-03

3260-06

3260P

- 3/8"drive extension bar - with ball
- DIN 3121

KING TONY	Total Length (inch)	(mm)	g	
3260-03P	3	75	96	6 / 120
3260-06P	6	150	168	5 / 100

3862 NEW

- 3/8"drive adapter
- Converting to 1/4" drive
- DIN 3121

KING TONY	Spec.	g	
3862	3/8"F x 1/4"M	33	24 / 384

3864

- 3/8"drive adapter
- Converting to 1/2" drive
- DIN 3121

KING TONY	Spec.	g	
3864	3/8"F x 1/2"M	51	24 / 384

3864P

- 3/8"drive adapter - with ball
- Converting to 1/2" drive
- DIN 3121

KING TONY	Spec.	g	
3864P	3/8"F x 1/2"M	51	24 / 384

Impact Accessory

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

3796

- 3/8" drive universal joint
- DIN 3121

KING TONY	L (inch)	L (mm)	g	
3796	2	50	83.4	10 / 200



3796P

- 3/8" drive universal joint - with ball
- DIN 3121

KING TONY	L (inch)	L (mm)	g	
3796P	2	50	83.4	10 / 200



90408
90409

- 3/8" drive locking rings
- High tensile rubber material

90608
90609

- 3/8" drive locking pins
- Chrome vanadium steel
- DIN 3129

	Desp.	ø	d / ℓ	Applied to socket sizes
90408	ring	3.5	12	3535M (6~12 mm) 3535S (1/4~1/2 inch) 3435M (6~12 mm) 3435S (1/4~1/2 inch) 3055M (4~12 mm) 3055S (3/16~1/2 inch) 3065M (4~10 mm) 3053 (T10~T15) 3575M (E5~E14) 3053.3055.3065.3147.3862.3864
90608	pin	2.5	14	
90409	ring	3.5	15	3535M (13~19mm) 3535S (9/16~3/4 inch) 3435M (13~24mm) 3435S (9/16~7/8 inch) 3260.3796
90609	pin	2.5	16	



90408
90409

90608
90609

Impact Bit Socket Set

3406 MP

- 6 PC. 3/8" drive bit socket set
- For hex head screws
- 55 mm L, 4 ~ 12 mm

	Contents						
3406MP	3055	4	5	6	8	10	12

kg		Metal case size (mm)
0.723	20	203 x 79 x 41 (0.023 cuft)

3419 PP

- 9 PC. 3/8" drive bit socket set
- For torx internal head
- 55 mm L, T10 ~ T50

	Contents								
3419PP	3053	T10	T15	T20	T25	T27	T30	T40	T 45	T50

kg		Metal case size (mm)
0.62	20	203 x 79 x 41 (0.023 cuft)

Impact Standard Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

4530 M

- 1/2" drive standard length
- 12 points
- Metric size
- Thin walled design on square driving side
- DIN 3129 ,ISO 2725-2



KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
453008M	8	14	25	7	38	67	10 / 200
453009M	9	15	25	7	38	67	10 / 200
453010M	10	17	25	8	38	70	10 / 200
453011M	11	18	25	8	38	71	10 / 200
453012M	12	19	25	9	38	72	10 / 200
453013M	13	20	25	10	38	72	10 / 200
453014M	14	22	25	10	38	77	10 / 200
453015M	15	23	30	11	38	112	10 / 160
453016M	16	24	30	11	38	112	10 / 160
453017M	17	26	30	12	38	115	10 / 160
453018M	18	27	30	13	38	115	10 / 160
453019M	19	28	30	13	38	120	10 / 160
453020M	20	29.2	30	13	38	120	10 / 160
453021M	21	30	30	14	40	125	8 / 160
453022M	22	32	30	14	40	143	8 / 160
453023M	23	33	30	15	40	143	8 / 160
453024M	24	34	30	15	42	152	6 / 120
453025M	25	36	30	15	42	168	6 / 120
453026M	26	37	30	15	42	173	6 / 120
453027M	27	38	30	16	44	176	6 / 120
453028M	28	41	30	16	44	194	6 / 120
453029M	29	41	30	17	44	194	6 / 120
453030M	30	42	30.5	17	44	201	6 / 120
453032M	32	46	30	19	44	205	6 / 120
453033M	33	46	30	19	46	227	6 / 96
453034M	34	46	30	20	46	231	6 / 96
453036M	36	47	30	20	46	248	6 / 96
NEW 453041M	41	52	30	22	52	298	6 / 60

4535 M

- 1/2" drive standard length
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3129 ,ISO 2725-2



KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
453508M	8	14	25	7	38	67	10 / 200
453509M	9	15	25	7	38	67	10 / 200
453510M	10	17	25	8	38	70	10 / 200
453511M	11	18	25	8	38	71	10 / 200
453512M	12	19	25	9	38	72	10 / 200
453513M	13	20	25	10	38	72	10 / 200
453514M	14	22	25	10	38	77	10 / 200
453515M	15	23	30	11	38	112	10 / 160
453516M	16	24	30	11	38	112	10 / 160
453517M	17	26	30	12	38	115	10 / 160
453518M	18	27	30	13	38	115	10 / 160
453519M	19	28	30	13	38	120	10 / 160
453520M	20	29.2	30	13	38	120	10 / 160
453521M	21	30	30	14	40	125	8 / 160
453522M	22	32	30	14	40	143	8 / 160
453523M	23	33	30	15	40	143	8 / 160
453524M	24	34	30	15	42	152	6 / 120
453525M	25	36	30	15	42	168	6 / 120
453526M	26	37	30	15	42	173	6 / 120
453527M	27	38	30	16	44	176	6 / 120
453528M	28	41	30	16	44	194	6 / 120
453529M	29	41	30	17	44	194	6 / 120
453530M	30	42	30.5	17	44	201	6 / 120
453532M	32	46	30	19	44	205	6 / 120
453533M	33	46	30	19	46	227	6 / 96
453534M	34	46	30	20	46	231	6 / 96
453536M	36	47	30	20	46	248	6 / 96
453538M	38	50	30	21	50	241	6 / 60
453539M	39	51	30	22	50	240	6 / 60
453541M	41	52	30	22	52	283	6 / 60
453546M	46	59	30	23	55	408	4 / 32

Impact Standard Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

4535 S

- 1/2" drive standard length
- 6 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.2

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
453510S	5/16	14	25	7	38	67	10 / 200
453512S	3/8	17	25	7	38	70	10 / 200
453514S	7/16	18	25	8	38	71	10 / 200
453516S	1/2	20	25	10	38	72	10 / 200
453518S	9/16	22	25	10	38	77	10 / 200
453520S	5/8	24	25	11	38	112	10 / 160
453522S	11/16	26	30	12	38	115	10 / 160
453524S	3/4	28	30	13	38	120	10 / 160
453526S	13/16	30	30	14	40	125	8 / 160
453528S	7/8	32	30	14	40	143	8 / 160
453530S	15/16	34	30	15	42	152	6 / 120
453532S	1	36	30	15	42	168	6 / 120
453534S	1-1/16	38	30	16	44	176	6 / 120
453536S	1-1/8	41	30	17	44	194	6 / 120
453538S	1-3/16	42	30.5	17	44	201	6 / 120
453540S	1-1/4	46	30	18	44	205	6 / 120

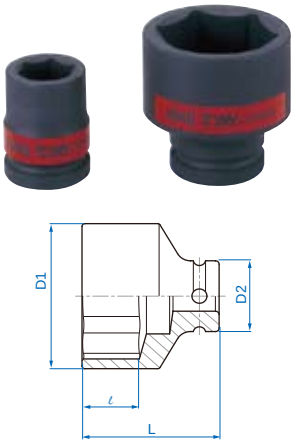

Impact Deep Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

4430 M

- 1/2" drive deep version
- 12 points
- Metric size
- Thin walled design on square driving side
- DIN 3121

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
443008M	8	14	25	12	78	130	6 / 120
443009M	9	15	25	12	78	135	6 / 120
443010M	10	17	25	12	80	150	6 / 120
443011M	11	18	25	13	80	160	6 / 120
443012M	12	19	25	14	80	170	6 / 120
443013M	13	20	25	14	80	165	6 / 120
443014M	14	22	25	14	80	180	6 / 120
443015M	15	23	30	16	80	236	6 / 96
443016M	16	24	30	16	80	243	6 / 96
443017M	17	26	30	16	80	255	6 / 96
443018M	18	27	30	17	80	267	6 / 96
443019M	19	28	30	18	80	260	6 / 96
443020M	20	29.2	30	20	80	252	6 / 96
443021M	21	30	30	20	80	251	6 / 96
443022M	22	32	30	22	80	304	5 / 60
443023M	23	33	30	24	80	310	5 / 60
443024M	24	34	30	24	80	318	5 / 60
443027M	27	38	30	27	80	368	5 / 60
443030M	30	42	30.5	30	80	422	5 / 50
443032M	32	46	30	32	80	460	1 / 24
443036M	36	47	30	36	80	535	1 / 24

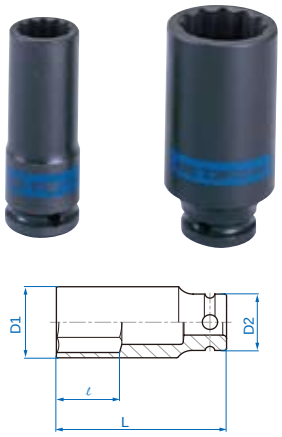

Impact Deep Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

4435 M

- 1/2" drive deep version
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3121

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
443508M	8	14	25	12	78	116	6 / 120
443509M	9	15	25	12	78	125	6 / 120
443510M	10	17	25	12	80	136	6 / 120
443511M	11	18	25	13	80	144	6 / 120
443512M	12	19	25	14	80	157	6 / 120
443513M	13	20	25	14	80	157	6 / 120
443514M	14	22	25	14	80	172	6 / 120
443515M	15	23	30	16	80	223	6 / 96
443516M	16	24	30	16	80	230	6 / 96
443517M	17	26	30	16	80	240	6 / 96
443518M	18	27	30	17	80	255	6 / 96
443519M	19	28	30	18	80	236	6 / 96
443520M	20	29.2	30	20	80	244	6 / 96
443521M	21	30	30	20	80	240	6 / 96
443522M	22	32	30	22	80	296	5 / 60
443523M	23	33	30	24	80	300	5 / 60
443524M	24	34	30	24	80	308	5 / 60
443525M	25	36	30	24	80	342	5 / 60
443526M	26	37	30	27	80	344	5 / 60
443527M	27	38	30	27	80	356	5 / 60
443528M	28	41	30	27	80	424	5 / 50
443529M	29	41	30	27	80	404	5 / 50
443530M	30	42	30.5	30	80	416	5 / 50
443532M	32	46	30	32	80	510	1 / 24
443533M	33	46	30	32	80	521	1 / 24
443534M	34	46	30	33	80	539	1 / 24
443536M	36	47	30	36	80	556	1 / 24
443538M	38	50	30	38	80	617	1 / 24
443541M	41	52	30	38	80	635	1 / 24
443546M	46	59	30	40	80	825	1 / 24



4435 S

- 1/2" drive deep version
- 6 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.2

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
443510S	5/16	14	25	12	78	123	6 / 120
443512S	3/8	17	25	12	80	148	6 / 120
443514S	7/16	18	25	13	80	148	6 / 120
443516S	1/2	20	25	14	80	159	6 / 120
443518S	9/16	22	25	14	80	170	6 / 120
443520S	5/8	24	25	16	80	232	6 / 96
443522S	11/16	26	30	17	80	235	6 / 96
443524S	3/4	28	30	18	80	251	6 / 96
443526S	13/16	30	30	20	80	243	6 / 96
443528S	7/8	32	30	22	80	292	5 / 60
443530S	15/16	34	30	24	80	308	5 / 60
443532S	1	36	30	24	80	336	5 / 60
443534S	1-1/16	38	30	27	80	356	5 / 60
443536S	1-1/8	41	30	27	80	401	5 / 50
443538S	1-3/16	42	30.5	30	80	409	5 / 50
443540S	1-1/4	46	30	32	80	423	1 / 24



Impact Thin Wall Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

4835 M

- 1/2" drive thin wall version
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3121

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
483510M	10	16	25	20	52	92	10 / 180
483511M	11	17	25	20	52	92	10 / 180
483512M	12	18	25	20	52	92	10 / 180
483513M	13	19	25	20	52	95	10 / 180
483514M	14	21	25	20	52	101	10 / 180
483516M	16	23	25	20	52	149	8 / 80
483517M	17	25	25	23	52	152	8 / 80
483519M	19	27	30	23	52	148	8 / 80
483521M	21	29	30	25	52	152	8 / 80
483522M	22	31	30	25	52	164	8 / 80
483523M	23	32	30	26	52	172	8 / 80
483524M	24	33	30	26	52	174	8 / 80
483526M	26	36	30	27	65	241	6 / 60
483527M	27	37	30	27	65	248	6 / 60
483530M	30	41	30.5	27	65	296	5 / 50



4930 M

- 1/2" drive deep thin wall version
- 12 points
- Metric size
- Thin walled design on square driving side
- DIN 3121

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
493008M	8	13.2	25	20	78	130	6 / 120
493009M	9	14.0	25	20	78	135	6 / 120
493010M	10	15.5	25	20	80	150	6 / 120
493011M	11	16.7	25	20	80	160	6 / 120
493012M	12	18.0	25	20	80	170	6 / 120
493013M	13	19.0	25	20	80	165	6 / 120
493014M	14	20.5	25	20	80	180	6 / 120
493015M	15	21.5	30	20	80	236	6 / 96
493016M	16	23.0	30	20	80	243	6 / 96
493017M	17	24.5	30	23	80	255	6 / 96
493018M	18	25.5	30	23	80	267	6 / 96
493019M	19	27.0	30	23	80	260	6 / 96
493020M	20	28.0	30	23	80	252	6 / 96
493021M	21	29.0	30	25	80	251	6 / 96
493022M	22	30.5	30	25	80	304	5 / 60
493023M	23	32.0	30	26	80	310	5 / 60
493024M	24	33.0	30	26	80	318	5 / 60
493027M	27	37.0	30	27	80	368	5 / 60
493030M	30	40.5	30	27	80	422	5 / 50
493032M	32	42.5	30	27	80	460	5 / 50
493036M	36	45.5	30	32	80	535	1 / 24



4935 M

- 1/2" drive deep thin wall version
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3121

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
493510M	10	15.5	25	20	80	132	6 / 120
493511M	11	16.7	25	20	80	151	6 / 120
493512M	12	18.0	25	20	80	148	6 / 120
493513M	13	19.0	25	20	80	148	6 / 120
493514M	14	20.5	25	20	80	156	6 / 120
493516M	16	23.0	30	20	80	213	6 / 96
493517M	17	24.5	30	23	80	230	6 / 96
493519M	19	27.0	30	23	80	238	6 / 96
493521M	21	29.0	30	25	80	234	6 / 96
493522M	22	30.5	30	25	80	294	5 / 60
493523M	23	32.0	30	26	80	300	5 / 60
493524M	24	33.0	30	26	80	285	5 / 60
493526M	26	35.5	30	27	80	341	5 / 60
493527M	27	37.0	30	27	80	358	5 / 60
493530M	30	40.5	30	27	80	413	5 / 60



Impact Thin Wall Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

4935 S

- 1/2" drive deep thin wall version
- 6 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.2

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
493510S	5/16	13.0	25	20	80	129	6 / 120
493512S	3/8	16.0	25	20	80	145	6 / 120
493514S	7/16	16.7	25	20	80	148	6 / 120
493516S	1/2	19.0	25	20	80	159	6 / 120
493518S	9/16	20.5	25	20	80	165	6 / 120
493520S	5/8	23.0	25	20	80	170	6 / 120
493522S	11/16	24.5	30	23	80	235	6 / 96
493524S	3/4	27.0	30	23	80	255	6 / 96
493526S	13/16	29.0	30	25	80	292	5 / 60
493528S	7/8	30.5	30	25	80	308	5 / 60
493530S	15/16	33.0	30	26	80	336	5 / 60
493532S	1	34.0	30	26	80	356	5 / 60
493534S	1-1/16	37.0	30	27	80	405	5 / 60
493536S	1-1/8	39.0	30	27	80	414	5 / 50
493538S	1-3/16	40.5	30	27	80	417	5 / 50
493540S	1-1/4	42.5	30	27	80	422	5 / 50



Impact Extra Thin Wall Socket

- Material - Cr-Mo
- For aluminum alloy wheel
- Finished with phosphate sunk
- Super thin wall version has less strength than standard deep version

4415 M

- 1/2" drive super thin wall version
- 6 points
- Metric size
- DIN 3121

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
441517M	17	23.8	25	17	80	236	6 / 96
441519M	19	25.8	30	20	80	249	6 / 96
441521M	21	27.8	30	22	80	241	6 / 96

Thin walled design (D1)



Impact Star Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

4575 M

- 1/2" drive impact star socket
- For torx external screws
- DIN 3121

KING TONY	SIZE	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
457510M	E10	14.0	25.0	7.5	38	67	10 / 200
457512M	E12	15.9	25.0	9.0	38	69	10 / 200
457514M	E14	17.7	25.0	10.0	38	71	10 / 200
457516M	E16	20.0	25.0	11.0	38	76	10/ 200
457518M	E18	22.0	25.0	12.5	38	79	10 / 200
457520M	E20	24.5	30.0	14.0	38	118	10 / 160



Impact Universal Joint Socket

4A55

- 1/2" drive deep version
- 6 points
- metric size
- special disign for confined spaces
- DIN 3121

Deep Version

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
4A5510	10	17.0	27.5	19	91	195	10 / 80
4A5511	11	19.0	27.5	19	91	207	10 / 80
4A5512	12	19.0	27.5	19	91	202	10 / 80
4A5513	13	21.8	27.5	19	91	207	10 / 80
4A5514	14	22.0	27.5	19	91	217	10 / 80
4A5515	15	22.0	27.5	19	91	228	10 / 80
4A5516	16	23.9	27.5	19	91	234	10 / 80
4A5517	17	26.0	27.5	19	91	256	6 / 60
4A5518	18	26.0	27.5	19	91	248	6 / 60
4A5519	19	27.9	27.5	19	91	259	6 / 60
4A5521	21	30.0	27.5	19	91	272	6 / 60
4A5522	22	31.7	27.5	23.5	91	278	6 / 60
4A5524	24	35.8	27.5	24	91	309	6 / 60



4B55

- 1/2" drive standard length
- 6 points
- metric size
- special disign for confined spaces
- DIN 3121

Standard Length

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
4B5510	10	17.0	27.5	12	64	161	10 / 120
4B5511	11	19.0	27.5	12	64	166	10 / 120
4B5512	12	19.0	27.5	12	64	162	10 / 120
4B5513	13	21.8	27.5	12	64	176	10 / 120
4B5514	14	22.0	27.5	12	64	174	10 / 120
4B5515	15	22.0	27.5	12	64	172	10 / 120
4B5516	16	23.9	27.5	12	64	180	10 / 120
4B5517	17	25.0	27.5	12	64	173	10 / 120
4B5518	18	25.8	27.5	12	64	173	10 / 120
4B5519	19	27.9	27.5	12	64	187	10 / 120
4B5521	21	30.0	27.5	12	64	190	10 / 120
4B5522	22	31.7	27.5	12	64	196	10 / 120
4B5524	24	35.8	27.5	12	64	217	6 / 96



Impact Bit Socket

- Material - chrome molybdenum alloy steel
- Finishing - with phosphate sunk

CAUTION

1. Do not over - load.
2. Control the air pressure under 6.3 bar, adjust the suitable torque from 0.

4053
4063

- 1/2" drive impact bit socket
- For torx internal screws
- DIN 3121

KING TONY	SIZE	L (mm)	Max.Torq (Nm)	g	
405325	T25	60	20.0	73.0	10 / 180
406325	T25	100	20.0	97.0	6 / 120
405327	T27	60	30.0	73.5	10 / 180
406327	T27	100	30.0	97.5	6 / 120
405330	T30	60	40.0	74.0	10 / 180
406330	T30	100	40.0	98.0	6 / 120
405340	T40	60	70.0	85.0	10 / 180
406340	T40	100	70.0	110.0	6 / 120
405345	T45	60	110.0	90.0	10 / 180
406345	T45	100	110.0	130.0	6 / 120
405350	T50	60	165.5	95.0	10 / 180
406350	T50	100	165.5	150.0	6 / 120
405355	T55	60	260.0	100.0	10 / 180
406355	T55	100	260.0	160.0	6 / 120
405360	T60	60	450.0	105.0	10 / 180
406360	T60	100	450.0	170.0	6 / 120

4053

4063

4055 M

- 1/2" drive impact bit socket
- Hexagon head
- DIN 3121

KING TONY	SIZE (mm)	L (mm)	Max.Torq (Nm)	g	
405504M	4	60	20.8	72	10 / 180
405505M	5	60	36.0	73	10 / 180
405506M	6	60	62.4	74	10 / 180
405507M	7	60	93.6	76	10 / 180
405508M	8	60	144.0	78	10 / 180
405510M	10	60	264.0	86	10 / 180
405512M	12	60	420.0	99	10 / 180
405513M	13	60	518.0	105	10 / 180
405514M	14	60	650.0	110	10 / 180

4055 S

- 1/2" drive impact bit socket
- Hexagon head
- ANSI/ASME B107.2

KING TONY	SIZE (inch)	L (mm)	Max.Torq (Nm)	g	
405506S	3/16	60	36.0	66	10 / 180
405508S	1/4	60	93.6	74	10 / 180
405510S	5/16	60	144.0	77	10 / 180
405512S	3/8	60	264.0	80	10 / 180
405514S	7/16	60	420.0	84	10 / 180
405516S	1/2	60	518.0	88	10 / 180

4056 M

- 1/2" drive impact bit socket
- Spline head
- DIN 3121

KING TONY	SIZE	L (mm)	Max.Torq (Nm)	g	
405608M	M 8	60	144.0	73	10 / 180
405610M	M10	60	264.0	81	10 / 180
405612M	M12	60	420.0	88	10 / 180

Impact Bit Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

CAUTION

1. Do not over - load.
2. Control the air pressure under 6.3 bar, adjust the suitable torque from 0.

4015 M

- 1/2" drive impact bit socket
- Hexagon head
- DIN 3121

KING TONY	SIZE (mm)	L (mm)	Max.Torq (Nm)	g	
401505M	5	80	36.0	84	6 / 120
401506M	6	80	62.4	86	6 / 120
401507M	7	80	93.6	89	6 / 120
401508M	8	80	144.0	96	6 / 120
401509M	9	80	229.0	114	6 / 120
401510M	10	80	264.0	136	6 / 120
401512M	12	80	420.0	145	6 / 120
401513M	13	80	518.0	155	6 / 120
401514M	14	80	650.0	164	6 / 120
401517M	17	80	715.0	248	6 / 96
401519M	19	80	786.0	246	6 / 96

4015 S

- 1/2" drive impact bit socket
- Hexagon head
- DIN 3121

KING TONY	SIZE (inch)	L (mm)	Max.Torq (Nm)	g	
401508S	1/4	80	144	87	6 / 120
401512S	3/8	80	420	125	6 / 120
401516S	1/2	80	518	150	6 / 120

4065

- 1/2" drive impact bit socket
- Hexagon head
- DIN 3121

KING TONY	SIZE (mm)	L (mm)	Max.Torq (Nm)	g	
406504	4	100	20.8	96	6 / 120
406505	5	100	36.0	97	6 / 120
406506	6	100	62.4	98	6 / 120
406508	8	100	144.0	110	6 / 120
406510	10	100	264.0	150	6 / 120
406512	12	100	420.0	170	6 / 120
406514	14	100	650.0	190	6 / 120

4075

- 1/2" drive impact bit socket
- Hexagon head
- DIN 3121

KING TONY	SIZE (mm)	L (mm)	Max.Torq (Nm)	g	
407505	5	150	36.0	115	6 / 120
407506	6	150	62.4	125	6 / 120
407508	8	150	144.0	145	6 / 120
407510	10	150	264.0	185	6 / 120
407512	12	150	420.0	225	6 / 120
407514	14	150	650.0	250	6 / 120

Impact Accessory

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

4147

- 1/2" drive bit holder
- DIN 3121

KING TONY	SIZE	Overall Length (mm)	g	
414708S	1/4"	48	69	12 / 216
414710S	5/16"	48	70	12 / 216
414710M	10 mm	48	72	12 / 216

414A08S NEW

- 1/2" drive bit holder
- Quick-release
- DIN 3121

KING TONY	SIZE	Overall Length (mm)	g	
414A08S	1/4"	51.2	93.6	10 / 180

Impact Accessory

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

4260

- 1/2" drive extension bar
- DIN 3121

KING TONY	Total Length (inch)	(mm)	g	
4260-03	3	75	197	4 / 80
4260-04	4	100	255	4 / 80
4260-05	5	125	277	2 / 40
4260-06	6	150	340	4 / 80
4260-10	10	250	452	4 / 48
4260-12	12	300	595	2 / 40

4260P

- 1/2" drive extension bar - with ball
- DIN 3121

KING TONY	Total Length (inch)	(mm)	g	
4260-03P	3	75	197	4 / 80
4260-04P	4	100	255	4 / 80
4260-05P	5	125	277	2 / 40
4260-06P	6	150	340	4 / 80
4260-10P	10	250	452	4 / 48
4260-12P	12	300	595	2 / 40

4796

- 1/2" drive universal joint
- DIN 3121

KING TONY	L (inch)	(mm)	g	
4796	2-3/8	59	121	6 / 96



4796P

- 1/2" drive universal joint - with ball
- DIN 3121

KING TONY	L (inch)	(mm)	g	
4796P	2-3/8	59	121	6 / 96



4797 4798

- 1/2" drive universal joint
- DIN 3121

KING TONY	Total Length (inch)	(mm)	g	
4797	2-1/2	67	172	6 / 96
4798	3	75	222	6 / 96

4797

4798

4797P 4798P 479AP

- 1/2" drive universal joint - with ball
- DIN 3121

NEW

KING TONY	Total Length (inch)	(mm)	g	
479AP	2-3/8	61	161	6 / 96
4797P	2-1/2	65	172	6 / 96
4798P	3	74	222	6 / 96

4797P

4798P

479AP

Impact Accessory

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

4863 4866

- 1/2" drive adapter
- Converting to 3/8", 3/4" drive
- 4863→ Max. torque 380 Nm
- DIN 3121

KING TONY	Spec.	g	
4863	1/2"F x 3/8"M	95	10 / 160
4866	1/2"F x 3/4"M	174	8 / 160

4863P 4866P

- 1/2" drive adapter - with ball
- Converting to 3/8", 3/4" drive
- 4863→ Max. torque 380 Nm
- DIN 3121

KING TONY	Spec.	g	
4863P	1/2"F x 3/8"M	95	10 / 160
4866P	1/2"F x 3/4"M	174	8 / 160

4873

- 1/2" drive adapter
- Converting to 3/8"
- 4873→ Max. torque 380 Nm
- DIN 3121

KING TONY	Spec.	d (mm)	g	
4873	1/2"F x 3/8"M	25	80	10 / 160



4863 4873

4873P

- 1/2" drive adapter - with ball
- Converting to 3/8"
- 4873→ Max. torque 380 Nm
- DIN 3121

KING TONY	Spec.	d (mm)	g	
4873P	1/2"F x 3/8"M	25	80	10 / 160



4863P 4873P

90401
90402

- 1/2" drive locking ring
- High tensile rubber material

90601
90602

- 1/2" drive locking pins
- Chrome vanadium steel
- DIN 3129

KING TONY	Desp.	ø	d / ℓ	Applied to socket sizes
90401	ring	3.5	19	4535M (8~14mm) 4535S (15/16"~9/16") 4435M (8~14mm) 4435S (15/16"~9/16") 4015M (5~14mm) 4015S (1/4"~1/2") 4055M (4~14mm) 4055S (3/16"~1/2") 4935M (10~14mm) 4935S (7/16"~9/16") 4415M (17mm) 4575 (E10~E18) 4835M (10~17mm) 414A08S.4053.4063 4530M (8~14mm) 4065.4075.4873.4015 4147.4055.4056
90601	pin	3.0	20	
90402	ring	3.5	23	4535M (15~46mm) 4535S (11/16"~1-1/4") 4435M (15~46mm) 4435S (5/8"~1-1/4") 4935M (16~30mm) 4935S (11/16"~1-1/4") 4015M (17.19mm) 4260.4796.4797.4863 4415M (19.21mm) 4873.4866 4530M (15~36mm) 4575M (E20) 4835M (19~30mm)
90602	pin	3.0	25	



90401
90402

90601
90602

Impact Socket Set

4408 MP
4408 SP

- 8 PC. 1/2" drive impact socket set
- 6 points, standard length
- 10~24 mm (3/8"~15/16")

	Contents	
4408MP	4535M	10 12 13 14 17 19 21 24
4408SP	4535S	3/8 7/16 1/2 9/16 11/16 3/4 13/16 15/16

4408MP

4408SP

	kg		Metal case size (mm)
4408MP	1.3	20	270 x 73 x 46 (0.032 cuft)
4408SP	1.3		

4412 MP

- 11 PC. 1/2" drive impact socket set
- 6 points, standard length
- 10~21 mm

	Contents
4412MP	4535M 10 11 12 13 14 15 16 17 18 19 21

kg		Metal case size (mm)
1.5	8	224 x 94 x 40 (0.03 cuft)

4414 SP

- 14 PC. 1/2" drive impact socket set
- 6 points, standard length
- 3/8"~1-1/4"

	Contents
4414SP	4535S 3/8 7/16 1/2 9/16 5/8 11/16 3/4 13/16 7/8 15/16 1 1-1/16 1-1/8 1-1/4

kg		Metal case size (mm)
2.4	8	270 x 100 x 49 (0.048 cuft)

4410 MP
4410 SP

- 8 PC. 1/2" drive impact socket set
- 6 points, deep version
- 12~23 mm (1/2"~15/16")

	Contents
4410MP	4435M 12 13 14 17 19 21 22 23
4410SP	4435S 1/2 9/16 5/8 11/16 3/4 13/16 7/8 15/16

4410MP

4410SP

	kg		Metal case size (mm)
4410MP	2.3	12	246 x 103 x 38 (0.034 cuft)
4410SP			

Impact Socket Set

4415 MP

- 15 PC. 1/2" drive impact socket set
- 6 points, deep version
- 10~32 mm

	Contents
4415MP	4435M 10 11 12 13 14 15 16 17 18 19 21 24 26 29 32

4415MP

kg		Metal case size (mm)
4.9	6	445 x 135 x 50 (0.106 cuft)

4415 MP 03

- 15 PC. 1/2" drive impact socket set
- 6 points, deep version
- 10~32 mm

	Contents
4415MP03	4435M 10 11 12 13 14 15 16 17 19 21 22 24 27 30 32

4415MP03

kg		Metal case size (mm)
4.9	6	445 x 135 x 50 (0.106 cuft)

4416 SP

- 14 PC. 1/2" drive impact socket set
- 6 points, deep version
- 3/8"~1-1/4"

	Contents
4416SP	4435S 3/8 7/16 1/2 9/16 5/8 11/16 3/4 13/16 7/8 15/16 1 1-1/16 1-1/8 1-1/4

4416SP

kg		Metal case size (mm)
4.8	6	445 x 135 x 50 (0.106 cuft)

4413 MP

- 8 PC. 1/2" drive impact socket set
- 6 points, thin wall version
- 10~24 mm

	Contents
4413MP	4835M 10 12 13 14 17 19 21 24

4413MP

kg		Metal case size (mm)
1.5	20	270 x 73 x 46 (0.032 cuft)

Impact Bit Socket Set

- Material - chrome molybdenum alloy steel
- Finishing with phosphate sunk

4417 PP

- 7 PC. 1/2" drive impact bit socket set
- For torx internal screws
- 60mm L, T25 ~ T60

	Contents
4417PP	4053 T25 T30 T40 T45 T50 T55 T60

4417PP

kg		Metal case size (mm)
0.94	20	198 x 105 x 32 (0.023 cuft)

4407 MP

- 7 PC. 1/2" drive impact bit socket
- For hex head screws
- 60mm L, 4 ~ 14 mm

	Contents
4407MP	4055 4 5 6 8 10 12 14

4407MP

kg		Metal case size (mm)
0.94	20	198 x 105 x 32 (0.023 cuft)

4467 PP

- 7 PC. 1/2" drive impact bit socket set
- For torx internal screws
- 100mm L, T25 ~T60

	Contents
4467PP	4063 T25 T30 T40 T45 T50 T55 T60

4467PP

kg		Metal case size (mm)
1.31	18	244 x 118 x 37 (0.038 cuft)

4457 MP

- 7 PC. 1/2" drive impact bit socket
- For hex head screws
- 100mm L, 4 ~ 14 mm

	Contents
4457MP	4065 4 5 6 8 10 12 14

4457MP

kg		Metal case size (mm)
1.44	18	244 x 118 x 37 (0.038 cuft)

4476 MP

- 6 PC. 1/2" drive impact bit socket set
- For hex head screws
- 150mm L, 5 ~ 14 mm

	Contents
4476MP	4075 5 6 8 10 12 14

4476MP

kg		Metal case size (mm)
1.47	18	244 x 118 x 37 (0.038 cuft)

Impact Socket Shelf Set

- Material from chrome molybdenum alloy steel
- Finished with phosphate sunk

4472 MP 4472MP : 158 PC.
4472 SP 4472SP : 106 PC.

■ Standard impact socket

		Contents	Each Q'ty
4472MP	4535M	8 9 10 11 12 13 14	8
		15 16 17 18 19 20 21	6
		22 23 24	7
		25 26 27 28	6
		29 30 32	5
4472SP	4535S	5/16 3/8 7/16 1/2 9/16	8
		5/8 11/16 3/4 13/16	6
		7/8 15/16	7
		1 1-1/16 1-1/8	6
		1-3/16 1-1/4	5

4472MP / 4472SP

	SPEC.	kg	CUFT	Metal case size (mm)
4472MP-A	87103	10.3	2.3	257 x 297 x 427 (1.866 cuft)
4472MP-D	158 pcs socket content	19.2	0.6	
4472SP-A	87103	10.3	2.3	
4472SP-D	106 pcs socket content	13	0.6	

4466 MP 4466MP : 166 PC.
4466 SP 4466SP : 102 PC.

■ Deep impact socket

		Contents	Each Q'ty
4466MP	4435M	8 9 10 11 12 13 14	8
		15 16 17 18 19 20 21 22 23 24	7
		25 26 27 28 29	6
		30 32	5
4466SP	4435S	5/16 3/8 7/16 1/2 9/16	8
		5/8 11/16 3/4 13/16 7/8 15/16	7
		1 1-1/16 1-1/8	6
		1-3/16 1-1/4	5

4466MP / 4466SP

	SPEC.	kg	CUFT	Metal case size (mm)
4466MP-A	87103	10.3	2.3	257 x 297 x 427 (1.866 cuft)
4466MP-D	166 pcs socket content	42.3	2.0	
4466SP-A	87103	10.3	2.3	
4466SP-D	102 pcs socket content	27.6	2.0	

Impact Standard Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

6510 M

- 3/4" drive standard length
- Lightweight type
- 12 points
- Metric size
- Thin walled design on square driving side
- DIN 3121

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
651017M	17	29.0	38	10	50	227	8 / 96
651018M	18	30.0	38	10	50	225	8 / 96
651019M	19	32.0	38	10	50	238	8 / 96
651021M	21	35.0	38	13	50	254	8 / 96
651022M	22	36.0	38	13	50	260	8 / 96
651023M	23	37.0	38	15	50	263	8 / 96
651024M	24	38.0	38	15	50	249	8 / 96
651026M	26	38.0	38	15	53	260	6 / 48
651027M	27	42.0	38	18	53	332	6 / 48
651028M	28	44.0	38	18	53	353	6 / 48
651029M	29	45.0	38	18	53	362	6 / 48
651030M	30	46.0	38	20	53	342	6 / 48



6515 M

- 3/4" drive standard length
- Lightweight type
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3121

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
651514M	14	25.0	38	10	50	215	8 / 96
651515M	15	26.0	38	10	50	217	8 / 96
651516M	16	27.5	38	10	50	220	8 / 96
651517M	17	29.0	38	10	50	225	8 / 96
651518M	18	30.0	38	10	50	230	8 / 96
651519M	19	32.0	38	10	50	238	8 / 96
651521M	21	35.0	38	13	50	252	8 / 96
651522M	22	36.0	38	13	50	257	8 / 96
651523M	23	37.0	38	15	50	283	8 / 96
651524M	24	38.0	38	15	50	288	8 / 96
651525M	25	38.0	38	15	53	321	8 / 96
651526M	26	38.0	38	15	53	321	6 / 48
651527M	27	42.0	38	18	53	320	6 / 48
651528M	28	44.0	38	18	53	345	6 / 48
651529M	29	45.0	38	18	53	350	6 / 48
651530M	30	46.0	38	20	53	360	6 / 48



6530 M

- 3/4" drive standard length
- 12 points
- Metric size
- Thin walled design on square driving side
- DIN 3129 ,ISO 2725-2

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
653017M	17	29.0	44	10	50	316	6 / 48
653019M	19	32.0	44	10	50	329	6 / 48
653021M	21	35.0	44	13	50	341	6 / 48
653022M	22	36.0	44	13	50	346	6 / 48
653023M	23	37.0	44	15	50	350	6 / 48
653024M	24	38.0	44	15	50	352	6 / 48
653026M	26	40.0	44	15	53	358	6 / 48
653027M	27	42.0	44	18	53	380	6 / 48
653028M	28	44.0	44	18	53	394	6 / 48
653029M	29	45.0	44	18	53	404	6 / 48
653030M	30	46.0	44	20	53	412	6 / 48
653032M	32	48.0	44	20	57	460	6 / 36
653033M	33	50.0	44	20	57	479	6 / 36
653034M	34	51.0	44	22	57	491	6 / 36
653035M	35	52.0	44	22	57	497	6 / 36
653036M	36	53.0	44	22	57	519	6 / 36
653038M	38	56.0	44	22	57	540	4 / 32
653040M	40	58.0	44	22	58	567	4 / 32
653041M	41	59.0	44	24	58	580	4 / 32
653042M	42	61.0	44	24	58	600	2 / 24
653046M	46	66.0	44	24	62	950	2 / 24
653063M	63	84.5	54	40	80	1343	1 / 12
653065M	65	86.5	54	43	80	1373	1 / 12
653070M	70	92.0	54	45	83	1451	1 / 12



Impact Standard Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

6535 M

- 3/4" drive standard length
- Standard type
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3129 ,ISO 2725-2

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
653517M	17	29.0	44	10	50	316	6 / 48
653518M	18	30.0	44	10	50	324	6 / 48
653519M	19	32.0	44	10	50	329	6 / 48
653521M	21	35.0	44	13	50	341	6 / 48
653522M	22	36.0	44	13	50	346	6 / 48
653523M	23	37.0	44	15	50	350	6 / 48
653524M	24	38.0	44	15	50	352	6 / 48
653526M	26	40.0	44	15	53	358	6 / 48
653527M	27	42.0	44	18	53	380	6 / 48
653528M	28	44.0	44	18	53	394	6 / 48
653529M	29	45.0	44	18	53	404	6 / 48
653530M	30	46.0	44	20	53	412	6 / 48
653532M	32	48.0	44	20	57	460	6 / 36
653533M	33	50.0	44	20	57	479	6 / 36
653534M	34	51.0	44	22	57	491	6 / 36
653535M	35	52.0	44	22	57	497	6 / 36
653536M	36	53.0	44	22	57	519	6 / 36
653538M	38	56.0	44	22	57	540	4 / 32
653540M	40	58.0	44	22	58	567	4 / 32
653541M	41	59.0	44	24	58	580	4 / 32
653542M	42	61.0	44	24	58	616	2 / 24
653543M	43	62.0	44	24	58	636	2 / 24
653544M	44	64.0	44	24	62	676	2 / 24
653546M	46	66.0	44	24	62	717	2 / 24
653548M	48	68.0	44	26	65	925	2 / 24
653550M	50	71.0	44	26	65	955	1 / 20
653552M	52	74.0	54	30	68	1085	1 / 20
653554M	54	76.0	54	30	68	1125	1 / 20
653555M	55	77.0	54	30	70	1160	1 / 20
653557M	57	79.0	54	32	70	1198	1 / 20
653558M	58	81.0	54	32	70	1226	1 / 20
653560M	60	84.0	54	32	70	1313	1 / 20
653563M	63	84.5	54	40	80	1341	1 / 12
653565M	65	86.5	54	43	80	1358	1 / 12



6535 S

- 3/4" drive standard length
- Standard type
- 6 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.2

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
653522S	11/16	29	38	10	50	225	8 / 96
653524S	3/4	32	38	10	50	238	8 / 96
653526S	13/16	35	38	13	50	252	8 / 96
653528S	7/8	36	38	13	50	257	8 / 96
653530S	15/16	37	38	15	50	288	8 / 96
653532S	1	38	38	15	53	320	6 / 48
653534S	1-1/16	42	40	18	53	325	6 / 48
653536S	1-1/8	45	44.7	18	53	355	6 / 48
653538S	1-3/16	46	40	20	53	365	6 / 48
653540S	1-1/4	48	44	20	57	460	6 / 36
653542S	1-5/16	50	44	20	57	479	6 / 36
653544S	1-3/8	52	44	22	57	497	6 / 36
653546S	1-7/16	54	44	22	57	529	6 / 36
653548S	1-1/2	56	44	22	57	540	4 / 32
653550S	1-9/16	58	44	22	58	567	4 / 32
653552S	1-5/8	59	44	24	58	580	4 / 32
653554S	1-11/16	63.5	44	25	58	636	2 / 24
653556S	1-3/4	64	44	25	62	676	2 / 24
653558S	1-13/16	66	44	25.5	62	717	2 / 24
653560S	1-7/8	68	54	27	65	925	2 / 24
653562S	1-15/16	70	54	27	65	955	1 / 20
653564S	2	72	54	28	68	1035	1 / 20
653566S	2-1/16	74	54	30	68	1078	1 / 20
653568S	2-1/8	76	54	30	68	1122	1 / 20
653570S	2-3/16	77	54	30.5	70	1151	1 / 20
653572S	2-1/4	79	54	32.5	70	1208	1 / 20
653574S	2-5/16	81	54	32.5	70	1245	1 / 20
653576S	2-3/8	84	54	33.5	70	1349	1 / 20



Impact Deep Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

6435 M

- 3/4" drive deep version
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3121

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
643519M	19	32	44	16	90	558	1 / 24
643521M	21	35	44	18	90	592	1 / 24
643522M	22	36	44	18	90	607	1 / 24
643523M	23	37	44	23	90	607	1 / 24
643524M	24	38	44	23	90	626	1 / 24
643525M	25	40	44	25	90	661	1 / 24
643526M	26	40	44	25	90	623	1 / 24
643527M	27	42	44	27	90	623	1 / 24
643528M	28	44	44	27	90	670	1 / 24
643529M	29	45	44	27	90	670	1 / 24
643530M	30	46	44	27	90	691	1 / 24
643532M	32	48	44	30	90	728	1 / 24
643533M	33	50	44	30	90	790	1 / 24
643534M	34	51	44	32	90	794	1 / 24
643535M	35	52	44	32	90	803	1 / 24
643536M	36	53	44	32	90	809	1 / 24
643538M	38	56	44	34	90	882	1 / 24
643540M	40	58	44	34	90	928	1 / 24
643541M	41	59	44	34	90	938	1 / 24
643542M	42	61	44	36	95	1074	1 / 24
643543M	43	62	44	38	95	1103	1 / 10
643544M	44	64	44	38	95	1180	1 / 10
643546M	46	66	44	38	95	1210	1 / 10
643548M	48	68	44	40	95	1391	1 / 10
643550M	50	71	44	40	95	1479	1 / 10
643555M	55	77	54	45	100	1810	1 / 10
NEW 643560M	60	84.5	54	50	100	2010	1 / 6
NEW 643565M	65	86.5	54	54	100	1990	1 / 6



6435 S

- 3/4" drive deep version
- 6 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.2

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
643524S	3/4	32	38	16	90	455	1 / 24
643526S	13/16	35	38	18	90	490	1 / 24
643528S	7/8	36	38	18	90	495	1 / 24
643530S	15/16	37	38	23	90	495	1 / 24
643532S	1	38	38	25	90	500	1 / 24
643534S	1-1/16	42	44	27	90	624	1 / 24
643536S	1-1/8	44.7	44	27	90	680	1 / 24
643538S	1-3/16	46	44	27	90	684	1 / 24
643540S	1-1/4	48	44	30	90	733	1 / 24
643542S	1-5/16	50	44	30	90	789	1 / 24
643544S	1-3/8	52	44	32	90	804	1 / 24
643546S	1-7/16	54	44	32	90	844	1 / 24
643548S	1-1/2	56	44	34	90	871	1 / 24
643550S	1-9/16	58	44	34	90	928	1 / 24
643552S	1-5/8	59	44	34	90	941	1 / 24
643554S	1-11/16	63.5	44	38	95	1111	1 / 10
643556S	1-3/4	64	44	38	95	1168	1 / 10
643558S	1-13/16	66	44	38	95	1241	1 / 10
643560S	1-7/8	68	54	40	95	1397	1 / 10
643562S	1-15/16	70	54	40	95	1448	1 / 10
643564S	2	72	54	40	95	1521	1 / 10



Impact Thin Wall Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

6835 M

- 3/4" drive thin wall version
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3121

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
683517M	17	28.0	44	16	60	320	6 / 48
683519M	19	30.0	44	16	60	348	6 / 48
683521M	21	33.0	44	18	60	355	6 / 48
683522M	22	34.0	44	18	60	362	6 / 48
683523M	23	35.0	44	23	60	370	6 / 48
683524M	24	36.5	44	23	60	378	6 / 48
683526M	26	39.0	44	25	80	400	1 / 24
683527M	27	40.0	44	26	80	424	1 / 24
683529M	29	43.0	44	26	80	460	1 / 24
683530M	30	44.0	44	26	80	478	1 / 24
683532M	32	46.5	44	26	80	512	1 / 24

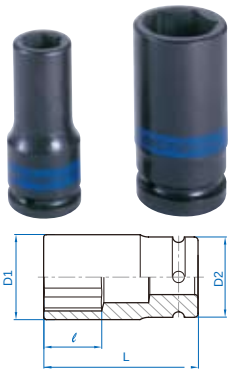

6935 M

- 3/4" drive deep thin wall version
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3121

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
693519M	19	30.0	44	16	90	562	1 / 24
693521M	21	33.0	44	18	90	597	1 / 24
693522M	22	34.0	44	18	90	612	1 / 24
693523M	23	35.0	44	23	90	614	1 / 24
693524M	24	36.5	44	23	90	619	1 / 24
693526M	26	39.0	44	25	90	629	1 / 24
693527M	27	40.0	44	27	90	631	1 / 24
693529M	29	43.0	44	27	90	672	1 / 24
693530M	30	44.0	44	27	90	693	1 / 24
693532M	32	46.5	44	30	90	733	1 / 24

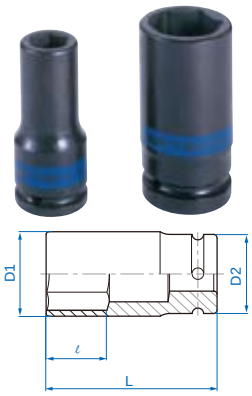

6935 S

- 3/4" drive deep thin wall version
- 6 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.2

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
693524S	3/4	30.0	38	16	90	370	1 / 24
693526S	13/16	33.0	38	18	90	380	1 / 24
693528S	7/8	34.0	38	18	90	385	1 / 24
693530S	15/16	36.5	38	23	90	415	1 / 24
693532S	1	38.0	38	23	90	500	1 / 24
693534S	1-1/16	40.0	44	25	90	654	1 / 24
693536S	1-1/8	43.0	44	25	90	680	1 / 24
693538S	1-3/16	44.0	44	27	90	684	1 / 24
693540S	1-1/4	46.5	44	30	90	733	1 / 24

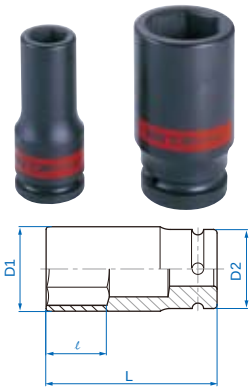

Rear Wheel Socket

- Chrome molybdenum steel, phosphate sunk.

6514 M

- 3/4" drive
- 4 points
- Metric size
- DIN 3121

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
651417M	17	39.8	34	28	53	350	1 / 24
651419M	19	39.8	34	28	53	332	1 / 24
651420M	20	41.8	36	28	53	377	1 / 24
651421M	21	41.8	36	28	53	370	1 / 24

Impact Bit Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

6015 M

- 3/4" impact hex bit socket
- DIN 3121

KING TONY	SIZE	L (mm)	g	
601514M	14	87	325	2/48
601517M	17	87	343	2/48
601519M	19	87	365	2/48
601521M	21	87	490	1/24
601522M	22	87	522	1/24
601524M	24	87	555	1/24
601527M	27	87	604	1/24

1740
609616 M

- Hex bit & bit holder
- DIN 3121

KING TONY	S (mm)	L (mm)	g	
174010H	10	40	46	20 / 400
174012H	12	40	52	20 / 400
174014H	14	40	60	20 / 200
174017H	17	40	73	20 / 200
174019H	19	40	80	20 / 200
174022H	22	40	97	12 / 120
609616M	16	52	370	6 / 48

1740

609616M

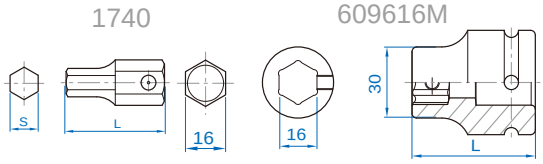

6085 M

- 3/4" impact hex bit socket
- DIN 3121

KING TONY	S (mm)	L (mm)	g	
608510	10	77	416	4 / 40
608512	12	77	422	4 / 40
608514	14	77	430	4 / 40
608517	17	77	443	4 / 40
608519	19	77	450	4 / 40
608522	22	77	473	4 / 40



1954
609622 M

- Hex bit & bit holder
- DIN 3121

KING TONY	S (mm)	L (mm)	g	
195419H	19	54.5	140	12 / 120
195422H	22	54.5	162	12 / 120
195424H	24	54.5	176	10 / 100
195427H	27	54.5	200	10 / 100
195432H	32	54.5	243	6 / 60
609622M	22	60.0	530	6 / 48

1954

609622M



6095

- 3/4" impact hex bit socket
- DIN 3121

KING TONY	S (mm)	L (mm)	g	
609519	19	93	670	1 / 24
609522	22	93	692	1 / 24
609524	24	93	706	1 / 24
609527	27	93	730	1 / 24
609532	32	93	783	1 / 24



Impact Accessory

- Chrome molybdenum alloy steel, phosphate sunk.

6260

- 3/4" drive extension bar
- DIN 3121

KING TONY	Overall Length (inch)	(mm)	g	
6260-04	4	100	577	2 / 20
6260-07	7	175	867	2 / 20
6260-10	10	250	1155	1 / 16
6260-13	13	330	1423	1 / 10

6260P

- 3/4" drive extension bars - with ball
- DIN 3121

KING TONY	Overall Length (inch)	(mm)	g	
6260-04P	4	100	577	2 / 20
6260-07P	7	175	867	2 / 20
6260-10P	10	250	1155	1 / 16
6260-13P	13	330	1423	1 / 10

6797 6798

- 3/4" drive universal joint
- DIN 3121

KING TONY	Overall Length (inch)	(mm)	g	
6797	4-1/2	114	742	2 / 20
6798	4-1/4	108	736	2 / 20

6797

6798

6797P 6798P

- 3/4" drive universal joint - with ball
- DIN 3121

KING TONY	Overall Length (inch)	(mm)	g	
6797P	4-1/2	114	742	2 / 20
6798P	4-1/4	108	736	2 / 20

6797P

6798P

6864 6868

- 3/4" drive adapter
- Converting to 1/2" drive
- 6864→ Max. torque 660 Nm
- DIN 3121

KING TONY	Spec.	g	
6864	3/4"F x 1/2"M	313	6 / 48
6868	3/4"F x 1"M	413	6 / 48

6864
6868

6864P 6868P

- 3/4" drive adapter - with ball
- Converting to1/2" drive
- 6864→ Max. torque 660 Nm
- DIN 3121

KING TONY	Spec.	g	
6864P	3/4"F x 1/2"M	313	6 / 48
6868P	3/4"F x 1"M	413	6 / 48

6864P
6868P

Impact Accessory

6874

- 3/4" drive adapter
- Converting to 1/2" drive
- 6874 → Max. torque 660 Nm
- DIN 3121

KING TONY	Spec.	d (mm)	g	
6874	3/4"F x 1/2"M	38	255	6 / 48

6874



6864 6874

6874P

- 3/4" drive adapter - with ball
- Converting to 1/2" drive
- 6874 → Max. torque 660 Nm
- DIN 3121

KING TONY	Spec.	d (mm)	g	
6874P	3/4"F x 1/2"M	38	255	6 / 48

6874P



6864P 6874P

90403
90404
90405

- 3/4" drive locking ring
- High tensile rubber material

90603
90604
90607

- 3/4" drive locking pins
- Chrome vanadium steel
- DIN 3129

	Desp.	ø	d / ℓ	Applied to socket sizes
90403	ring	3.5	33	6015M (14~19mm) 6435S (3/4"~1") 6510M (17~30mm) 6535S (11/16"~1-3/16") 6515M (17~30mm) 6935S (3/4"~1") 6874
90607	pin	3.0	30	
90404	ring	5.5	37	6535M (17~46mm) 6535S (1-1/4" ~ 1-13/16") 6435M (19~46mm) 6435S (1-1/16"~1-13/16") 6935M (19~32mm) 6935S (1-1/16"~1-1/4") 6015M (21~27mm) 6260.6797.6798.6864 6530M (17~46mm) 6868 6835M (17~32mm) 609616M.609622M
90603	pin	4.0	35	
90405	ring	5.5	44	6535M (48~65mm) 6535S (1-7/8" ~ 2-3/8") 6435M (48~50mm) 6435S (1-7/8" ~ 2")
90604	pin	4.0	45	



90403
90404
90405

90603
90604
90607

Impact Socket Set

6408 MP
6408 MP 10
6408 SP 10

- 8 PC. 3/4" drive impact socket set
- 6 points, standard / lightweight type
- 19~38 mm (3/4"~1-1/2")

	Contents
6408MP	6535M 19 22 24 27 30 32 36 38
6408MP10	6515M 19 22 24 27 30 6535M 32 36 38
6408SP10	6535S 3/4 7/8 15/16 1-1/16 1-3/16 1-1/4 1-7/16 1-1/2

6408MP / 6408MP10

6408SP10

	kg		Metal case size (mm)
6408MP	3.9	6	241 x 124 x 68 (0.07 cuft)
6408MP10	3.5		
6408SP10	3.5		

6409 MP
6409 MP 10
6409 SP 10

- 8 PC. 3/4" drive impact socket set
- 6 points, standard / lightweight type
- 26~38 mm (1"~1-1/2")

	Contents
6409MP	6535M 26 29 30 32 34 35 36 38
6409MP10	6515M 26 29 30 6535M 32 34 35 36 38
6409SP10	6535S 1 1-1/16 1-1/8 1-1/4 1-5/16 1-3/8 1-7/16 1-1/2

6409MP / 6409MP10

6409SP10

	kg		Metal case size (mm)
6409MP	4.7	2	445 x 100 x 65 (0.10 cuft)
6409MP10	4.6		
6409SP10	4.6		

6410 MP
6410 SP

- 8 PC. 3/4" drive impact socket set
- 6 points, deep version
- 26~38 mm (1"~1-1/2")

	Contents
6410MP	6435M 26 29 30 32 34 35 36 38
6410SP	6435S 1 1-1/16 1-1/8 1-1/4 1-5/16 1-3/8 1-7/16 1-1/2

6410MP

6410SP

	kg		Metal case size (mm)
6410MP	7.1	2	445 x 100 x 65 (0.10 cuft)
6410SP			

Impact Bit Socket Set

6411 MP

- 11 PC. 3/4" drive impact bit socket set

Contents		
6411MP	16 22 6096M	10 12 14 17 1740 19 22 24 27 32 1954

kg		Metal case size (mm)
1.5	8	270 x 100 x 49 (0.048 cuft)

Impact Standard Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

8535 M

- 1" drive standard length
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3129 ,ISO2725-2

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
853519M	19	35	54	15	58	508	1 / 24
853521M	21	37	54	15	58	529	1 / 24
853522M	22	38	54	15	58	520	1 / 24
853523M	23	39	54	17	58	542	1 / 24
853524M	24	41	54	17	58	529	1 / 24
853525M	25	42	54	17	58	567	1 / 24
853526M	26	43	54	19	58	558	1 / 24
853527M	27	44	54	19	58	538	1 / 24
853528M	28	45	54	19	58	538	1 / 24
853529M	29	47	54	19	58	600	1 / 24
853530M	30	48	54	20	60	592	1 / 24
853532M	32	51	54	20	62	679	1 / 24
853533M	33	52	54	20	62	700	1 / 24
853534M	34	53	54	20	62	766	1 / 24
853535M	35	54	54	20	62	779	1 / 24
853536M	36	56	54	20	65	729	1 / 24
853538M	38	58	54	22	65	742	1 / 24
853540M	40	60	54	22	65	800	1 / 24
853541M	41	61	54	22	70	846	1 / 24
853542M	42	64	54	22	70	890	1 / 20
853544M	44	67	54	26	70	1000	1 / 20
853546M	46	68	54	26	75	1075	1 / 20
853548M	48	70	54	26	75	1085	1 / 20
853550M	50	73	54	26	75	1170	1 / 20
853552M	52	75	54	30	80	1300	1 / 12
853553M	53	76	54	30	80	1300	1 / 12
853554M	54	78	54	30	80	1400	1 / 12
853555M	55	79	54	32	83	1433	1 / 12
853558M	58	83	54	32	83	1542	1 / 12
853560M	60	86	54	32	87	1758	1 / 12
853563M	63	90	54	34	87	1750	1 / 12
853565M	65	92	54	34	90	1758	1 / 12
853566M	66	94	54	34	90	1966	1 / 12
853568M	68	95	54	34	90	1966	1 / 12
853570M	70	97	54	34	93	2112	1 / 8
853571M	71	99	86	36	93	2925	1 / 8
853575M	75	104	86	36	95	3188	1 / 8
853580M	80	110	86	43	95	3350	1 / 4
853585M	85	115	86	43	95	3250	1 / 4
853590M	90	122	86	43	100	3950	1 / 4
853595M	95	130	95	52	105	-	1 / 2
8535A0M	100	136	95	55	105	-	1 / 2



Impact Standard Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

8535 S

- 1" drive standard length
- 6 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.2

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
853524S	3/4	35	54	15	58	508	1 / 24
853526S	13/16	37	54	15	58	529	1 / 24
853528S	7/8	38	54	15	58	520	1 / 24
853530S	15/16	41	54	17	58	529	1 / 24
853532S	1	42	54	17	58	567	1 / 24
853534S	1-1/16	44	54	19	58	538	1 / 24
853536S	1-1/8	47	54	19	58	600	1 / 24
853538S	1-3/16	48	54	20	60	592	1 / 24
853540S	1-1/4	51	54	20	62	679	1 / 24
853542S	1-5/16	52	54	20	62	700	1 / 24
853544S	1-3/8	54	54	20	62	779	1 / 24
853546S	1-7/16	56	54	20	65	729	1 / 24
853548S	1-1/2	58	54	22	65	742	1 / 24
853550S	1-9/16	60	54	22	65	800	1 / 24
853552S	1-5/8	61	54	22	70	846	1 / 24
853554S	1-11/16	64	54	22	70	890	1 / 20
853556S	1-3/4	67	54	26	70	1000	1 / 20
853558S	1-13/16	68	54	26	75	1075	1 / 20
853560S	1-7/8	70	54	26	75	1085	1 / 20
853562S	1-15/16	72	54	26	75	1140	1 / 20
853564S	2	74	54	30	75	1235	1 / 20
853566S	2-1/16	75	54	30	80	1300	1 / 12
853568S	2-1/8	78	54	30	80	1400	1 / 12
853570S	2-3/16	79	54	32	83	1433	1 / 12
853572S	2-1/4	82	54	32	83	1500	1 / 12
853574S	2-5/16	83	54	32	83	1542	1 / 12
853576S	2-3/8	86	54	32	87	1758	1 / 12
853578S	2-7/16	88	54	34	87	1760	1 / 12
853580S	2-1/2	90	54	34	87	1750	1 / 12
853582S	2-9/16	92	54	34	90	1758	1 / 12
853584S	2-5/8	94	54	34	90	1966	1 / 12
853586S	2-11/16	95	54	34	90	1966	1 / 12
853588S	2-3/4	97	54	34	93	2112	1 / 8
853590S	2-13/16	99	86	36	93	2925	1 / 8
853592S	2-7/8	102	86	36	93	3050	1 / 8
853594S	2-15/16	104	86	36	95	3188	1 / 8
853596S	3	106	86	36	95	3205	1 / 8
8535A0S	3-1/8	110	86	43	95	3350	1 / 4
8535A4S	3-1/4	112	86	43	95	3300	1 / 4
8535A8S	3-3/8	117	86	43	100	3550	1 / 4
8535B2S	3-1/2	122	86	43	100	3950	1 / 4

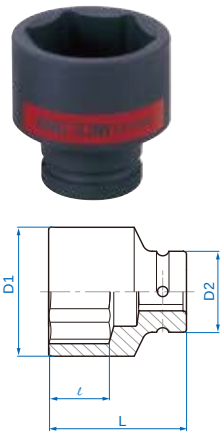

Impact Deep Socket

- Chrome molybdenum alloy steel, phosphate sunk.

8435 M

- 1" drive deep version
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3121

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
843524M	24	41	54	25	90	850	1 / 24
843527M	27	44	54	25	90	879	1 / 24
843528M	28	45	54	25	90	892	1 / 24
843530M	30	48	54	28	90	916	1 / 24
843532M	32	51	54	28	90	979	1 / 24
843533M	33	52	54	28	92	1016	1 / 24
843534M	34	53	54	28	92	1029	1 / 24
843535M	35	54	54	28	92	1016	1 / 24
843536M	36	56	54	32	92	1033	1 / 24
843538M	38	58	54	32	92	1025	1 / 24
843540M	40	60	54	32	92	1075	1 / 24
843541M	41	61	54	32	92	1083	1 / 24
843542M	42	64	54	32	92	1100	1 / 24
843546M	46	68	54	35	95	1137	1 / 12
843548M	48	70	54	35	95	1400	1 / 12
843550M	50	73	54	35	95	1518	1 / 6
843552M	52	75	54	40	100	1637	1 / 6
843554M	54	78	54	40	100	1750	1 / 6
843555M	55	79	54	40	100	1862	1 / 6
843558M	58	83	54	42	100	1925	1 / 6
843560M	60	86	54	42	100	2050	1 / 6
843565M	65	92	54	50	110	-	1 / 6
843570M	70	97	54	50	110	-	1 / 4

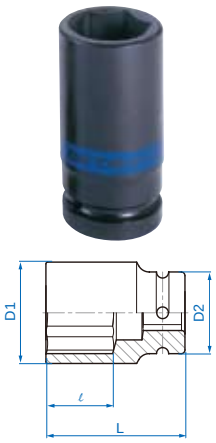

8435 S

- 1" drive deep version
- 6 points
- Inch size
- Thin walled design on square driving side
- ANSI/ASME B107.1

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
843530S	15/16	40.8	54	25	90	850	1 / 24
843532S	1	42	54	25	90	860	1 / 24
843534S	1-1/16	44	54	25	90	879	1 / 24
843536S	1-1/8	46.3	54	25	90	900	1 / 24
843538S	1-3/16	48	54	28	90	916	1 / 24
843540S	1-1/4	51	54	28	90	979	1 / 24
843542S	1-5/16	52	54	28	92	1016	1 / 24
843544S	1-3/8	54	54	28	92	1016	1 / 24
843546S	1-7/16	56	54	32	92	1033	1 / 24
843548S	1-1/2	58	54	32	92	1025	1 / 24
843550S	1-9/16	60	54	32	92	1075	1 / 24
843552S	1-5/8	61	54	32	92	1083	1 / 24
843554S	1-11/16	64	54	32	92	1100	1 / 24
843556S	1-3/4	67	54	32	92	1120	1 / 12
843558S	1-13/16	68	54	35	95	1137	1 / 12
843560S	1-7/8	70	54	35	95	1400	1 / 6
843562S	1-15/16	72	54	35	95	1480	1 / 6
843564S	2	74	54	35	95	1577	1 / 6
843566S	2-1/16	75	54	40	100	1637	1 / 6
843568S	2-1/8	78	54	40	100	1750	1 / 6
843570S	2-3/16	79	54	40	100	1862	1 / 6
843572S	2-1/4	82	54	42	100	1900	1 / 6

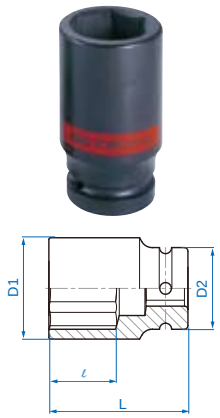

Impact Thin Wall Socket

- Chrome molybdenum steel, phosphate sunk.

8835 M

- 1" drive deep version
- Thin wall version
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3121

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
883524M	24	38.0	54	26	80	626	1 / 24
883527M	27	42.0	54	26	80	643	1 / 24
883529M	29	44.0	54	26	80	700	1 / 24
883530M	30	46.0	54	30	80	696	1 / 24
883532M	32	48.0	54	30	80	714	1 / 24
883533M	33	49.0	54	30	80	748	1 / 24
883534M	34	50.0	54	30	80	764	1 / 24
883535M	35	52.0	54	32	80	776	1 / 24
883536M	36	53.0	54	32	80	779	1 / 24
883538M	38	56.0	54	32	80	810	1 / 24
883541M	41	59.5	54	32	80	866	1 / 24



Rear Wheel Socket

- Chrome molybdenum steel, phosphate sunk.

8514 M
8514 S
8534 M

- 1" drive
- 4 points
- Metric size
- DIN 3121

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
851417M	17	40.0	54	30.0	60	618	1 / 24
851419M	19	42.0	54	30.0	60	618	1 / 24
851420M	20	43.0	54	30.0	60	621	1 / 24
851421M	21	44.0	54	30.0	60	621	1 / 24
851422M	22	45.5	54	30.0	60	621	1 / 24
853417M	17	38.0	54	23.5	76	628	1 / 24
853419M	19	43.0	54	23.5	76	682	1 / 24
853421M	21	47.0	54	23.5	76	733	1 / 24
851426S	13/16	44	54	30.0	60	625	1 / 24

8514M

deep version



8534M



Impact Accessory

- Chrome molybdenum alloy steel, phosphate sunk.

8260

- 1" drive extension bars
- DIN 3121

KING TONY	Overall Length (inch)	(mm)	g	
8260-07	7	175	1393	1 / 16
8260-10	10	250	1891	1 / 12
8260-13	13	330	2455	1 / 9

8260P

- 1" drive extension bars - with ball
- DIN 3121

KING TONY	Overall Length (inch)	(mm)	g	
8260-07P	7	175	1393	1 / 16
8260-10P	10	250	1891	1 / 12
8260-13P	13	330	2455	1 / 9

8797

- 1" drive universal joint
- DIN 3121

KING TONY	Overall Length (inch)	(mm)	g	
8797	5	128	1530	1 /18

8797P

- 1" drive universal joint - with ball
- DIN 3121

KING TONY	Overall Length (inch)	(mm)	g	
8797P	5	128	1530	1 /18

Impact Accessory

- Chrome molybdenum alloy steel, phosphate sunk.

8866

- 1" drive adapters
- Converting to 3/4" drive
- Max. → torque 1412 Nm
- DIN 3121

KING TONY	Spec.	g	
8866	1"F x 3/4"M	562	4 / 32

8866P

- 1" drive adapters - with ball
- Converting to 3/4" drive
- Max. → torque 1412 Nm
- DIN 3121

KING TONY	Spec.	g	
8866P	1"F x 3/4"M	562	4 / 32

8869

- 1" drive adapter
- Converting to 1-1/2" drive
- DIN 3121

KING TONY	Spec.	g	
8869	1" F x 1-1/2"M	963	1 / 24

8869P

- 1" drive adapter - with ball
- Converting to 1-1/2" drive
- DIN 3121

KING TONY	Spec.	g	
8869P	1" F x 1-1/2"M	963	1 / 24

90405 90406

- 1" drive locking ring
- High tensile rubber material

90605 90606

- 1" drive locking pin
- Chrome vanadium steel
- DIN 3129

KING TONY	Desp.	ø	d / ℓ	Applied to socket sizes
90405	ring	5.5	44	8535M (19~70mm) 8535S (3/4"~2-3/4") 8435M (24~60mm) 8435S (15/16"~2-1/4") 8835M (24~60mm) 8514M.8514S.8534M.806519M 8260.8797.8866.8869
90605	pin	5.0	45	
90406	ring	10	75	8535M (71~90mm) 8535S (2-13/16"~3-1/2")
90606	pin	5.0	75	



90405
90406

90605
90606

Impact Socket Set

8408 MP

- 8 PC. 1" drive impact socket set
- 6 PC. thin wall version, 24 ~ 41 mm
- 2 pcs budd wheel,17 & 21 mm

	Contents
8408MP	8835M: 24 27 32 36 38 41
	8534M: 17 21

8408MP

kg		Metal case size (mm)
6.9	2	445 x 120 x 68 (0.128 cuft)

8409 MP

- 8 PC. 1" drive impact socket set
- 6 points, deep version
- 24 ~ 41mm

	Contents
8409MP	8435M: 24 27 30 32 33 36 38 41

8409MP

kg		Metal case size (mm)
7.82	2	445 x 100 x 65 (0.104 cuft)

8410 MP
8410 SP

- 8 PC. 1" drive impact socket set
- 6 points, standard length
- 24 ~ 41 mm (15/16" ~ 1-5/8")

	Contents
8410MP	8535M: 24 27 30 32 33 36 38 41
8410SP	8535S: 15/16 1-1/16 1-3/16 1-1/4 1-5/16 1-7/16 1-1/2 1-5/8

8410MP

8410SP

	kg		Metal case size (mm)
8410MP	6.4	4	280 x 130 x 74 (0.095 cuft)
8410SP			

Impact Standard Socket

- Material - chrome molybdenum alloy steel
- Finished with phosphate sunk

9535 M

- 1-1/2" drive standard length
- 6 points
- Metric size
- Thin walled design on square driving side
- DIN 3129

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
NEW 953532M	32	56	86	23	80	-	1/6
NEW 953533M	33	57	86	23	80	-	1/6
NEW 953534M	34	58	86	24	80	-	1/6
NEW 953536M	36	62	86	26	80	-	1/6
NEW 953538M	38	64	86	26	80	-	1/6
NEW 953541M	41	68	86	28	80	-	1/6
NEW 953542M	42	70	86	28	80	-	1/6
953546M	46	73	86	30	85	2233	1/6
953550M	50	78	86	32	85	2300	1/6
953555M	55	85	86	36	93	2660	1/6
953560M	60	90	86	40	95	2840	1/6
953565M	65	96	86	42	100	3150	1/6
953570M	70	103	86	46	103	3460	1/6
953575M	75	108	86	48	105	3700	1/4
953580M	80	115	86	52	105	3900	1/4
953585M	85	121	86	55	110	4175	1/4
953590M	90	127	86	58	110	4600	1/4
953595M	95	134	127	50	110	7570	1/1
9535A0M	100	140	127	53	115	8104	1/1
9535A5M	105	146	127	53	115	8340	1/1
9535B0M	110	152	127	56	125	9400	1/1
9530B5M	115	160	127	60	125	9766	1/1
9535C0M	120	166	127	62	130	10460	1/1
9535C5M	125	172	127	65	135	11148	1/1
9535D0M	130	180	127	68	140	12423	1/1
9535D5M	135	185	127	70	145	13090	1/1
9535E0M	140	190	127	75	150	13570	1/1
9535F0M	150	200	127	80	155	14270	1/1



Impact Accessory

- Chrome molybdenum alloy steel, phosphate sunk.

9868

- 1-1/2" drive adapter
- Converting to 1" drive
- Max. → torque 2515Nm
- DIN 3121

KING TONY	Spec.	g	
9868	1-1/2" F x 1"M	2360	1 / 6

9868P

- 1-1/2" drive adapter - with ball
- Converting to 1" drive
- Max. → torque 2515Nm
- DIN 3121

KING TONY	Spec.	g	
9868P	1-1/2" F x 1"M	2360	1 / 6

#5 Spline Drive Impact Socket

- Chrome molybdenum alloy steel, phosphate sunk

5535 M

14-teeth spline drive
- 6 points
- Metric size
- Thin walled design on spline drive side

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
553533M	33	52	60	20	100	-	-
553535M	35	54	60	20	100	-	-
553538M	38	58	60	22	100	-	-
553541M	41	61	60	22	100	-	-

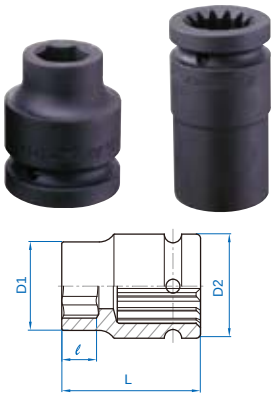

5535 S

14-teeth spline drive
- 6 points
- Inch size
- Thin walled design on spline drive side

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
553534S	1-1/16	44	60	19	80	-	-
553536S	1-1 / 8	47	60	19	80	-	-
553540S	1-1 / 4	51	60	20	80	-	-
553542S	1-5/16	52	60	20	100	-	-
553546S	1-7/16	56	60	20	100	-	-

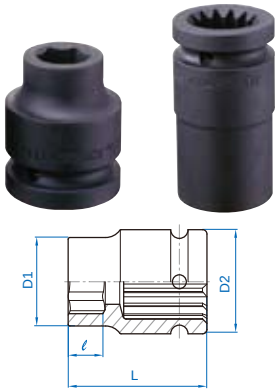

5534 M

14-teeth spline drive
- 4 points
- Metric size
- Thin walled design on spline drive side

KING TONY	mm	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
553417M	17	37	60	25	75	-	-
553421M	21	44	60	25	75	-	-

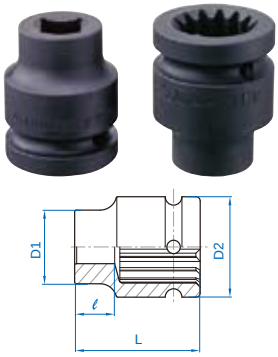

5534 S

14-teeth spline drive
- 4 points
- Inch size
- Thin walled design on spline drive side

KING TONY	inch	D1 (mm)	D2 (mm)	ℓ (mm)	L (mm)	g	
553426S	13/16	44	60	25	75	-	-
553430S	15/16	48	60	25	75	-	-

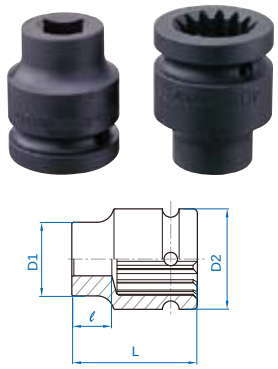

Notes

Pneumatic Tools

- Impact Wrench
- Composite Impact Wrench
- Impact Socket & Wrench Set
- Impact Screwdriver
- Cordless Impact Wrench Set

Motorcycle Auto Truck Agriculture Construction Factory

KING TONY

Impact Wrench Series Instruction List

KING TONY	Drive	Maximum Torque ft.lb	Maximum Torque Nm	Motorcycle	Auto	Truck	Agriculture	Construction	Factory	Page
33311-020	3/8"	200	271	●	●				●	P01
33351-030	3/8" (Composite)	300	407	●	●				●	P08
33451-030	1/2" (Composite)	300	407	●	●				●	P08
33421-040	1/2"	500	678	●	●	●			●	P01
33411-020	1/2"	200	271	●	●	●			●	P02
33411-040	1/2"	500	678	●	●	●			●	P02
33411-050	1/2"	650	881	●	●	●			●	P02
33412-040	1/2"	500	678	●	●	●			●	P02
33412-050	1/2"	650	881	●	●	●			●	P02
33461-060	1/2" (Composite)	600	813	●	●	●			●	P08
33462-060	1/2" (Composite)	600	813	●	●	●			●	P08
33611-055	3/4"	700	949			●	●		●	P03
33612-055	3/4"	700	949			●	●		●	P03
33621-075	3/4"	800	1085			●	●		●	P03
33622-075	3/4"	800	1085			●	●		●	P03
33631-110	3/4"	1100	1491			●	●		●	P03
33632-110	3/4"	1100	1491			●	●		●	P03
33841-180	1"	1800	2440			●	●	●		P04
33842-180	1"	1800	2440			●	●	●		P04
33851-120	1"	1200	1626			●	●	●		P04
33852-120	1"	1200	1626			●	●	●		P04
33811-150	1"	1500	2033			●	●	●		P05
33812-150	1"	1500	2033			●	●	●		P05
33831-180	1"	1800	2440			●	●	●		P05
33832-180	1"	1800	2440			●	●	●		P05
33851-250	1"	2500	3388			●	●	●		P05
33852-250	1"	2500	3388			●	●	●		P05
33911-250	1-1/2"	2500	3388			●		●		P06
33912-250	1-1/2"	2500	3388			●		●		P06
33921-300	1-1/2"	3000	4065			●		●		P06
33922-300	1-1/2"	3000	4065			●		●		P06

Impact Wrench

33311

- 3/8" drive super duty impact wrench
- Aluminum alloy housing
- Nickel chrome molybdenum square driver
- Variable speed trigger
- Muffled on handle exhaust
- Standard anvil is available
- General specification
  - Rotary speed : 10000RPM
  - Air pressure : 90PSI recommended
  - Air inlet thread size : 1/4"
  - Air hose size : 3/8" ID
  - For an assembly line use

20% More Power Less Vibration

Mechanism-Jumbo Hammer

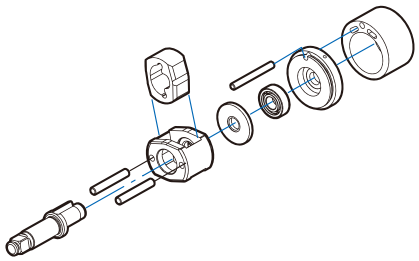

KING TONY	Type	Maximum Torque ft.lb	Maximum Torque Nm	Average Air Consumption (CFM)	Std. Bolt Size inch	Std. Bolt Size mm	Overall Length inch	Sound DBA Pressure (Power) DB (Power)	kg	
33311-020	Standard anvil	200	271	2.5	7/16"	M11	5-1/2"	94	1.35	1 / 8

33421

- 1/2" drive super duty impact wrench
- Aluminum alloy housing
- Nickel chrome molybdenum square driver
- Variable speed trigger
- Muffled on front exhaust
- Standard anvil is available
- General specification
  - Rotary speed : 8000RPM
  - Air Pressure : 90PSI recommended
  - Air inlet thread size : 1/4"
  - Air hose size : 3/8" ID

20% More Power Less Vibration

Twin Hammer

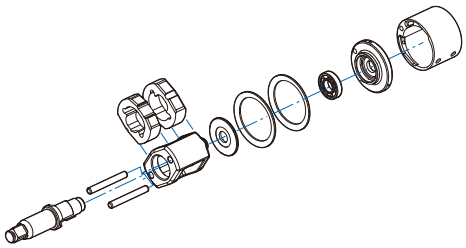

KING TONY	Type	Maximum Torque ft.lb	Maximum Torque Nm	Average Air Consumption (CFM)	Std. Bolt Size inch	Std. Bolt Size mm	Overall Length inch	Sound DBA Pressure (Power) DB (Power)	kg	
33421-040	Standard anvil	500	678	4.0	5/8"	M16	6-3/4"	85	2.56	1 / 8

Impact Wrench

33411 & 33412

- 1/2" drive impact wrench
- Aluminum alloy housing
- Nickel chrome molybdenum square driver
- Variable speed trigger
- Muffled on handle exhaust
- Standard & 2" extension anvil is available
- General specification
  - Free speed : 8000 RPM (33411&33412)
  - Rotary speed : 10000RPM (33411-020)
  - Air pressure : 90 PSI recommended
  - Air inlet : 1/4"
  - Air hose size : 3/8" ID
  - For an assembly line use (33411-020)

20% *More Power Less Vibration*

33411-020

Mechanism - Jumbo Hammer

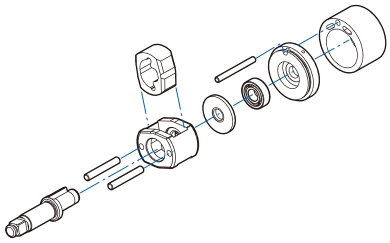

New Twin Hammer

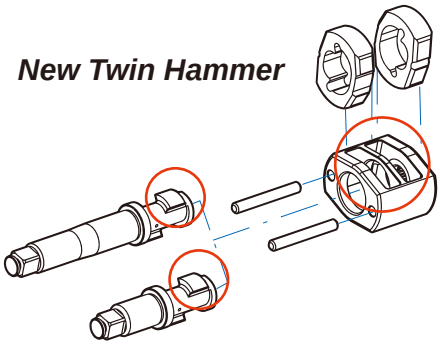

33411-040

33412-040

14103GP

33411-050

33412-050

KING TONY	Type	Maximum Torque ft.lb	Nm	Average Air Consumption (CFM)	Std. Bolt Size inch	mm	Overall Length inch	Sound DBA Pressure (Power) DB (Power)	Vib M/S2	kg	
33411-020	Standard anvil	200	271	2.5	7/16"	M11	5-1/2"	94	-	1.35	1 / 10
33411-040	Standard anvil	500	678	4.0	5/8"	M16	7-23/64"	91	4.85	2.6	1 / 8
33411-050	Standard anvil	650	881	4.4	3/4"	M19	7-41/64"	75	8.13	2.8	1 / 8
33412-040	Long anvil	500	678	4.0	5/8"	M16	9-23/64"	91	4.80	2.8	1 / 8
33412-050	Long anvil	650	881	4.4	3/4"	M19	9-23/64"	75	6.84	3.2	1 / 8
14103GP	3 pcs repair tools										

Impact Wrench

33611 & 33612
33621 & 33622

- 3/4" drive impact wrench
- Aluminum alloy housing
- Nickel chrome molybdenum square driver
- Variable speed trigger
- Muffled on handle exhaust
- Standard & 6" extension anvil is available
- General specification
  - Free speed : 6500 RPM
  - Air pressure : 90 PSI recommended
  - Air inlet : 1/4"
  - Air hose size : 3/8" ID

20% More Power Less Vibration

33611-055

33612-055

33621-075

33622-075

33012

33011

33013

14103GP

New Twin Hammer !!

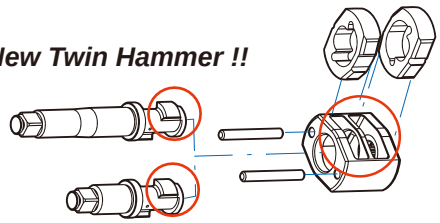

KING TONY	Type	Maximum Torque ft.lb	Maximum Torque Nm	Average Air Consumption (CFM)	Std. Bolt Size inch	Std. Bolt Size mm	Overall Length inch	Sound DBA Pressure (Power) DB (Power)	Vib M/S2	kg	
33611-055	Standard anvil	700	949	4.4	7/8"	M20	7-13/32"	79	8.64	3.00	1 / 8
33612-055	Long anvil	700	949	4.4	7/8"	M20	11-13/32"	79	-	3.00	1 / 8
33621-075	Standard anvil	800	1085	7.0	1"	M24	8-63/64"	86	6.89	4.50	1 / 4
33622-075	Long anvil	800	1085	7.0	1"	M24	12-63/64"	86	6.46	4.50	1 / 4
14103GP	3 pcs repair tools									0.58	1 / 20

33631 & 33632

- 3/4" drive impact wrench
- Nickel chrome molybdenum square driver
- Variable speed trigger
- Muffled on handle exhaust
- Standard & 6" extension anvil is available
- General specification
  - Free speed : 5500 RPM
  - Air pressure : 90 PSI recommended
  - Air inlet : 3/8"
  - Air hose size : 1/2" ID

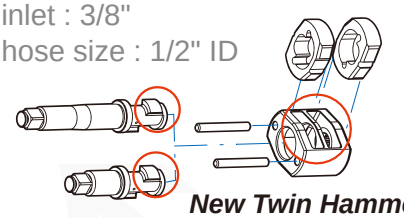

New Twin Hammer !!

33631-110

33632-110

KING TONY	Type	Maximum Torque ft.lb	Maximum Torque Nm	Average Air Consumption (CFM)	Std. Bolt Size inch	Std. Bolt Size mm	Overall Length inch	Sound DBA Pressure (Power) DB (Power)	Vib M/S2	kg	
33631-110	Standard anvil	1100	1491	9.5	1-3/16"	M30	8-43/64"	87	5.31	5.60	1/4
33632-110	long anvil	1100	1491	9.5	1-3/16"	M30	14-55/64"	87	-	6.04	1/4

Impact Wrench

33841 & 33842

- 1" drive impact wrench
- Nickel chrome molybdenum square driver
- Variable speed trigger
- Muffled on handle exhaust
- Standard & 6" extension anvil are available
- General specification
  - Free speed : 4000 RPM
  - Air pressure : 90 PSI recommended
  - Air inlet : 1/2"
  - Air hose size : 3/4" ID

New Twin Hammer !!

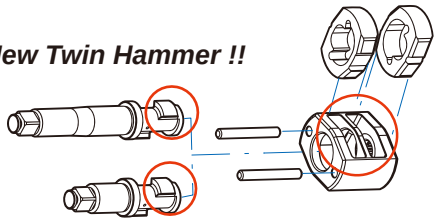

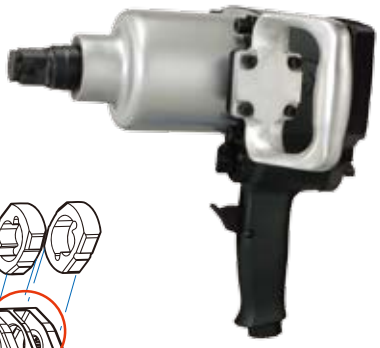

33841-180

33842-180

KING TONY	Type	Maximum Torque ft.lb	Nm	Average Air Consumption (CFM)	Std. Bolt Size inch	mm	Overall Length inch	Sound DBA Pressure (Power) DB (Power)	Vib M/S2	kg	
33841-180	Standard anvil	1800	2440	9.0	1-27/64"	M36	12-3/32"	83	4.37	10.62	1 / 2
33842-180	Long anvil	1800	2440	9.0	1-27/64"	M36	20-5/64"	83	-	12.52	1 / 2

33851 & 33852

- 1" drive impact wrench
- Nickel chrome molybdenum square driver
- Variable speed trigger
- Muffled on handle exhaust
- Standard & 6" extension anvil are available
- General specification
  - Free speed : 5500 RPM
  - Air pressure : 90 PSI recommended
  - Air inlet : 3/8"
  - Air hose size : 1/2" ID

New Twin Hammer !!

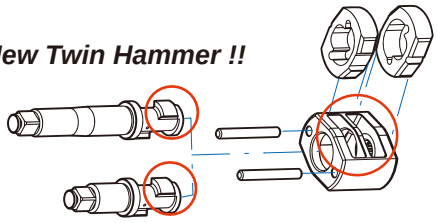

33851-120

33852-120

KING TONY	Type	Maximum Torque ft.lb	Nm	Average Air Consumption (CFM)	Std. Bolt Size inch	mm	Overall Length inch	Sound DBA Pressure (Power) DB (Power)	kg	
33851-120	Standard anvil	1200	1626	9.5	1-17/64"	M32	8-53/64"	86	5.64	1 / 4
33852-120	Long anvil	1200	1626	9.5	1-17/64"	M32	14-1/64"	86	6.04	1 / 4

Impact Wrench

33811 & 33812
33831 & 33832

- 1" drive impact wrench
- Aluminum alloy housing
- Nickel chrome molybdenum square driver
- Variable speed trigger
- Side exhaust
- 6" extension & short anvil are available
- General specification
  - Free speed : 4000 RPM
  - Air pressure : 90 PSI recommended
  - Air inlet : 1/2"
  - Air hose size : 3/4" ID

20% More Power Less Vibration

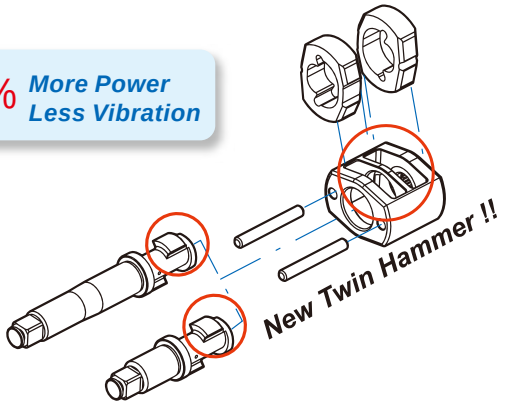

33811-150

33812-150

33831-180

33832-180

KING TONY	Type	Maximum Torque ft.lb	Maximum Torque Nm	Average Air Consumption (CFM)	Std. Bolt Size inch	Std. Bolt Size mm	Overall Length inch	Sound DBA Pressure (Power) DB (Power)	Vib M/S2	kg	
33811-150	Standard anvil	1500	2033	9.0	1-1/4"	M36	14-19/32"	83	10.77	10.3	1 / 1
33812-150	Long anvil	1500	2033	9.0	1-1/4"	M36	20-19/32"	83	6.13	11.3	1 / 1
33831-180	Standard anvil	1800	2440	9.0	1-1/2"	M38	14-19/32"	88	8.84	11.5	1 / 1
33832-180	Long anvil	1800	2440	9.0	1-1/2"	M38	20-19/32"	88	6.6	12.5	1 / 1

33851-250 & 33852-250

- 1" drive impact wrench
- Nickel chrome molybdenum square driver
- Variable speed trigger
- Standard & 8" extension anvil are available
- General specification
  - Free speed : 3000 RPM
  - Air pressure : 90 PSI recommended
  - Air inlet : 1/2"
  - Air hose size : 3/4" ID

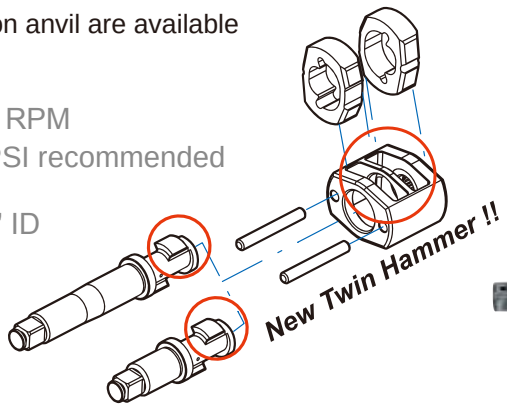

33851-250

33852-250

KING TONY	Type	Maximum Torque ft.lb	Maximum Torque Nm	Average Air Consumption (CFM)	Std. Bolt Size inch	Std. Bolt Size mm	Overall Length inch	Sound DBA Pressure (Power) DB (Power)	Vib M/S2	kg	
33851-250	Standard anvil	2500	3388	14.5	1-25/32"	M45	17-11/64"	89	6.30	15.8	1 / 1
33852-250	Long anvil	2500	3388	14.5	1-25/32"	M45	24-7/8"	87	-	18.7	1 / 1

Impact Wrench

33911 & 33912
33921 & 33922

- 1-1/2" drive impact wrench
- Nickel chrome molybdenum square driver
- Variable speed trigger
- Standard & 8" extension anvil are available
- General specification

  - Free speed : 3000 RPM
  - Air pressure : 90 PSI recommended
  - Air inlet : 1/2"
  - Air hose size : 3/4" ID

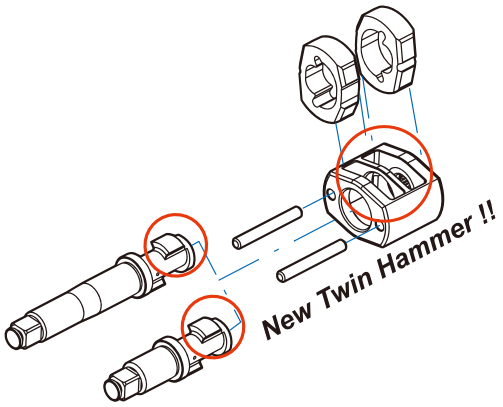

33911-250
33921-300

33912-250
33922-300

KING TONY	Type	Maximum Torque ft.lb	Maximum Torque Nm	Average Air Consumption (CFM)	Std. Bolt Size inch	Std. Bolt Size mm	Overall Length inch	Sound DBA Pressure (Power) DB (Power)	Vib M/S2	kg	
33911-250	Standard anvil	2500	3388	14.5	1-25/32"	M45	17-53/64"	85	6.32	15.8	1 / 1
33912-250	long anvil	2500	3388	14.5	1-25/32"	M45	23-53/64"	85	6.53	18.7	1 / 1
33921-300	Standard anvil	3000	4065	16.0	2"	M50	17-3/4"	90	8.86	19.7	1 / 1
33922-300	long anvil	3000	4065	16.0	2"	M50	25-15/32"	90	7.12	22.8	1 / 1

Composite Impact Wrench

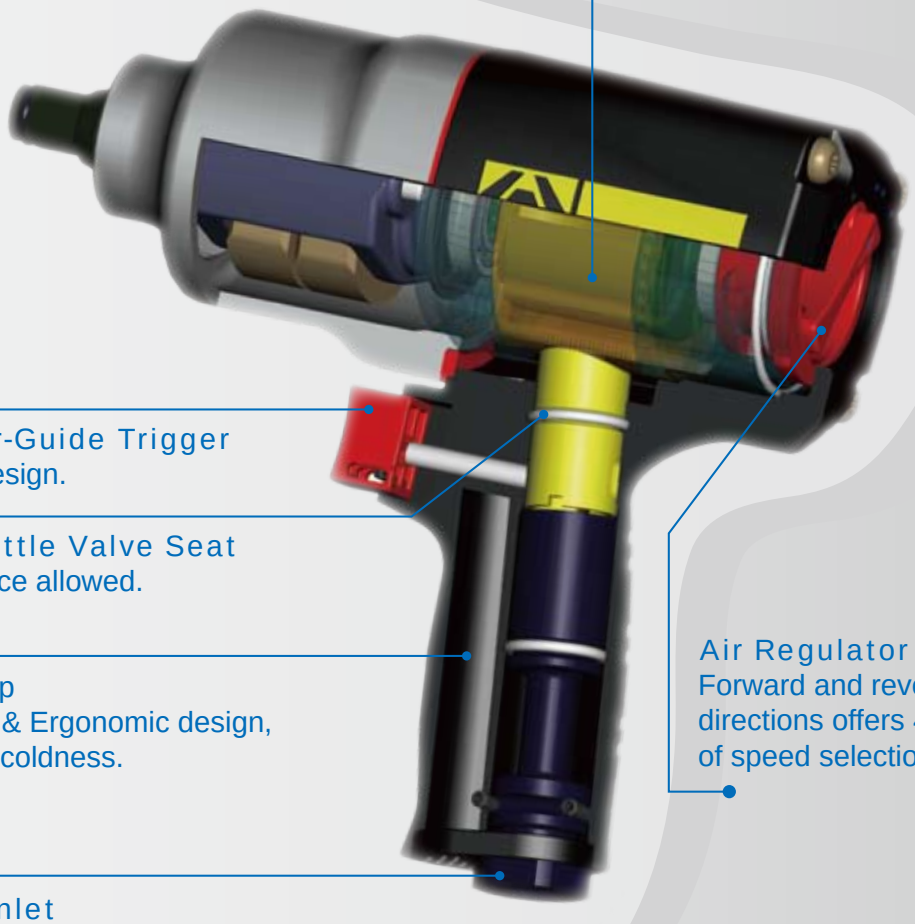

Patented Three-way Air inlet Function
Increases 10% and more at horsepower delivery than same level tools.

End Cap Slider-Guide Trigger
Easy operation design.

Improved Throttle Valve Seat
Easier maintenance allowed.

Composite Grip
Super lightweight & Ergonomic design, isolating from the coldness.

Air Regulator
Forward and reverse directions offers 4 section of speed selection.

Improved Air Inlet
Effectively reduces the damage of thread.

33351-030
33451-030

33461-060

33462-060

Composite Impact Wrench

33351 & 33451

- 3/8" & 1/2" drive impact wrench
  (3/8" drive 33351)
  (1/2" drive 33451)
- Light weight durable composite housing.
- Nickel chrome molybdenum square driver
- Variable speed trigger
- Muffler on handle exhaust
- General specification
  - Free speed : 10000 RPM
  - Air pressure : 90 PSI recommended
  - Air inlet : 1/4"
  - Air hose size : 3/8" ID

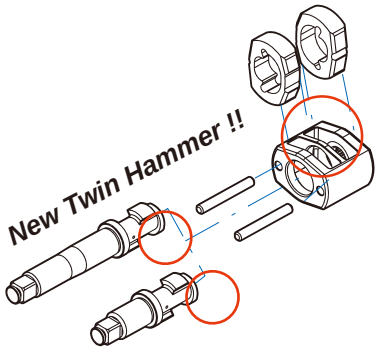

KING TONY	Type	Maximum Torque ft.lb	Maximum Torque Nm	Average Air Consumption (CFM)	Std. Bolt Size inch	Std. Bolt Size mm	Overall Length inch	Sound DBA Pressure (Power) DB (Power)	Vib M/S2	kg	
33351-030	Standard anvil	300	407	4.2	3/8"	M10	5-1/2"	92	2.07	1.3	1 / 12
33451-030	Standard anvil	300	407	4.2	3/8"	M10	5-1/2"	92	2.66	1.3	1 / 12

33461 & 33462

- 1/2" drive impact wrench
- Light weight durable composite housing.
- Nickel chrome molybdenum square driver
- Variable speed trigger
- Muffler on handle exhaust
- Standard & 6" extension anvil is available
- General specification
  - Free speed : 8000 RPM
  - Air pressure :
    90 PSI recommended
  - Air inlet : 1/4"
  - Air hose size : 3/8" ID

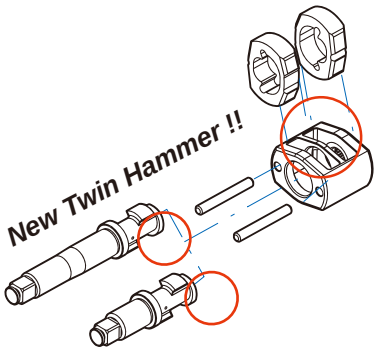

33461-060

33462-060

KING TONY	Type	Maximum Torque ft.lb	Maximum Torque Nm	Average Air Consumption (CFM)	Std. Bolt Size inch	Std. Bolt Size mm	Overall Length inch	Sound DBA Pressure (Power) DB (Power)	Vib M/S2	kg	
33461-060	Standard anvil	600	813	4.9	3/4"	M19	7-1/32"	92	4.23	2.1	1 / 8
33462-060	Long anvil	600	813	4.9	3/4"	M19	9-5/8"	92	-	2.5	1 / 8

Air Ratchet Wrench

360° exhaust rotation direct air away from working area.

The ergonomically enhanced composite handle grip with professional and super touch.

KING TONY

1.Dust-free design

2.Prevents deformation and triples the life of the parts.

Regular

Air Ratchet Wrench

37221 & 37321

- 1/4" & 3/8" drive air ratchet wrench
  (1/4" drive 37221)
  (3/8" drive 37321)
- 360° exhaust rotation direct air away from working area.
- Dust-free design of ratchet housing keeps away the dirt and other objects.
- General specification
  - Free speed :
    250 RPM (37221)
    270 RPM (37321)
  - Air pressure : 90 PSI recommended
  - Air inlet : 1/4"
  - Air hose size : 3/8" ID

KING TONY	Maximum Torque ft.lb	Nm	Average Air Consumption (CFM)	Std. Bolt Size inch	mm	Overall Length inch	Sound DBA Pressure (Power) DB (Power)	Vib M/S2	kg	
37221-030	20	27	2.8	1/4"	M6	8-1/16"	98	2.32	0.67	1 / 30
37321-050	40	54	2.8	5/16"	M8	8-1/16"	98	2.26	0.67	1 / 30

37323

- 3/8" drive air ratchet wrench
- 360° exhaust rotation direct air away from working area.
- Dust-free design of ratchet housing keeps away the dirt and other objects.
- General specification
  - Free speed : 280 RPM
  - Air pressure : 90 PSI recommended
  - Air inlet : 1/4"
  - Air hose size : 3/8" ID

KING TONY	Maximum Torque ft.lb	Nm	Average Air Consumption (CFM)	Std. Bolt Size inch	mm	Overall Length inch	Sound DBA Pressure (Power) DB (Power)	Vib M/S2	kg	
37323-080	80	108	4.0	3/8"	M10	11"	107	2.52	1.25	1 / 12

37423

- 1/2" drive air ratchet wrench
- 360° exhaust rotation direct air away from working area.
- Dust-free design of ratchet housing keeps away the dirt and other objects.
- General specification
  - Free speed : 280 RPM
  - Air pressure : 90 PSI recommended
  - Air inlet : 1/4"
  - Air hose size : 3/8" ID

KING TONY	Maximum Torque ft.lb	Nm	Average Air Consumption (CFM)	Std. Bolt Size inch	mm	Overall Length inch	Sound DBA Pressure (Power) DB (Power)	Vib M/S2	kg	
37423-080	80	108	4.0	3/8"	M10	11"	107	2.07	1.25	1 / 12

Impact Screwdriver

33111

- 1/4" drive impact screwdriver
- General specification

- Free speed : 10000RPM
- Air pressure : 90 PSI recommended
- Air inlet thread size : 1/4"
- Air hose size : 3/8" ID

Mechanism-Hex.Twin Dog

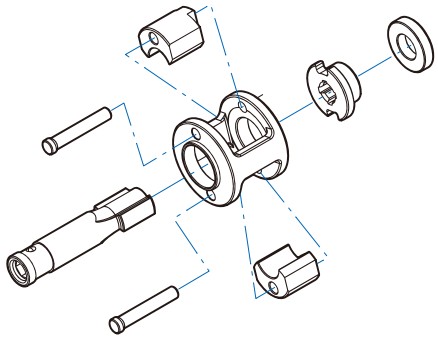

KING TONY	Free Speed	Air Inlet	Average Air Consumption (CFM)	Capacity Screw Size		Overall Length	Max Torque	Sound DBA Pressure (power)	kg	
	RPM	NPT		inch	mm	inch				
33111	10000	1/4	7.5	3/16	M5	7-1/2	26ft-lb	90	0.73	20

Cordless Impact Wrench Set

44504MP

- Voltage : DC 19.2V
- Chuck : 1/2" (13mm) Square Drive
- Dimension : 261×78×270 mm (10.3"×3.1"×10.6")
- Charger : 2.0Ah Ni-Cd

- Body cotain TPR+GF, double injection housing
- Interchangeable motor caron-brush to extend motor's life
- LED light indicator, side handle & ergonomic grip to help you in work
- Impact function - shorten working time
- Safe device - Thermostat controller to make the motor stop automatically when temperature reach 70°C
- Easy realease slide battery pack - quick and safe

Contents:

■ Cordless Impact Wrench

■ 2.0AH Ni-Cd Battery Pack x 2

■ 1HR Charger

■ Auxiliary Handle

■ Safety Instructions & Operation Manual

KING TONY	Unload Speed (rpm)	Max Torque (N-m / in-lb)	Charger Suitable	g	
44504MP	0 ~ 2500	310 / 2742	CE (European) UL (American & Asia)	6833	1 / 3
44504MPB	0 ~ 2500	310 / 2742		6833	1 / 3

Impact Socket & Wrench Set

44116 MP

21 PC. 1/2" drive impact socket wrench set

- **Sockets**
  -10 PC. 6 points, standard length, 9 ~ 27mm
  -3 PC. 6 points thin wall version, 17 ~ 21mm
- **Impact wrench**
  -1 PC impact wrench
- **Accessories**
  -1 PC extension bar
  -1 PC universal joint
  -2 PC. ring Ø 3.5 x 19mm & Ø 3.5 x 23mm
  -2 PC. pin Ø 3 x 20 & Ø 3 x 25 (6150)

Contents		
44116MP	4535M: 9 10 11 13 14 17 19 22 24 27 4415M: 17 19 21	33411-040, 4260-05, 4797, 90401, 90402, 90601, 90602, SY-221M (Japanesque type)

44116MP

kg		Blow case size (mm)
6.1	4	315 x 250 x 120 (0.339 cuft)

44118 MP

23 PC. 1/2" drive impact socket wrench set

- **Sockets**
  -14 PC. 6 points, deep version, 10 ~ 27mm
- **Impact wrench**
  -1 PC impact wrench
- **Accessories**
  -2 PC. extension bar, 3" & 5" L
  -1 PC universal joint
  -2 PC. ring Ø 3.5 x 19mm & Ø 3.5 x 23mm
  -2 PC. pin Ø 3 x 20mm & Ø 3 x 25mm (6150)

Contents		
44118MP	4435M: 10 11 12 13 14 16 17 19 21 22 23 24 26 27	33411-040, 4260-03, 4260-05, 4797, 90401, 90402, 90601, 90602, SY-221M (Japanesque type)

44118MP

kg		Blow case size (mm)
8.4	2	420 x 315 x 100 (0.475 cuft)

Impact Socket & Wrench Set

64111 MP

14 PC. 3/4" drive impact socket wrench set

- **Sockets**
  -8 PC. 6 points, standard length, 26 ~ 38mm
- **Impact wrench**
  -1 PC impact wrench
- **Accessories**
  -1 PC extension bar, 7" L
  -1 PC universal joint
  -1 PC ring Ø 5.5 x 37mm
  -1 PC pin Ø 4 x 35
  -1 PC air adaptor

	Contents	
64111MP	6535M: 26 27 28 30 32 35 36 38	33621-075, 6260-07, 6797, 90404, 90603, SY-221M (Japanesque type)

kg		Blow case size (mm)
10.8	2	420 x 315 x 100 (0.475 cuft)

64115 MP

18 PC. 3/4" drive impact socket wrench set

- **Sockets**
  -12 PC. 6 points, standard length
- **Impact wrench**
  -1 PC impact wrench
- **Accessories**
  -1 PC extension bar, 7" L
  -1 PC universal joint
  -1 PC ring Ø 5.5 x 37mm
  -1 PC pin Ø 4.0 x 35mm
  -1 PC air adaptor

	Contents	
64115MP	6535M: 24 26 27 29 30 32 33 34 35 36 38 41	33621-075, 6260-07, 6797, 90404, 90603, SY-221M (Japanesque type)

kg		Blow case size (mm)
13.3	2	510 x 390 x 115 (0.822 cuft)

Notes

Torque Tools

■ Torque Wrench ■ Interchangeable Torque Wrench Set ■ Insert Tool
■ Digital Torque Wrench ■ Digital Torque Adapter ■ Torque Screwdriver

Difference of torque wrenches

Square driver	Model	Tolerance of torque-KT	Tolerence of torque - international standard	KING TONY	Nm	in-lb	ft-lb	Torque value display type	Torque lock design	Quality application	Page
Industry Quality Adjustable Torque Wrench											
1/4"		±3%	±4%	34262 series	4~20	30~200		laser scale	easy lock / auto lock	Industry level	155
3/8"				34362 series	4~100	30~200	10~80				
1/2"				34462 series	40~340		20~250				
3/4"				34662 series	100~1000		50~750				
1"				34862 series	200~1500		150~1000				
Mini-type Industry Quality Torque Wrench											
1/4"		±3%	±4%	3426C series	3~25			laser scale	easy lock / auto lock	Industry level	156
3/8"				3436C series	3~25						
72 PT Industry Quality Adjustable Torque Wrench											
1/4"		±3%	±4%	3426A series	2~20	20~200		laser scale	easy lock / auto lock	Industry level	157
3/8"				3436A series	20~100		10~80				
1/2"				3446A series	40~400		20~250				
3/4"				3466A series	80~400						
Industry Quality Interchangeable Torque Wrench											
9 x 12 mm		±3%	±4%	34512 series	2~100	20~200	10~80	laser scale	easy lock / auto lock	Industry level	158
14 x 18 mm				34522 series	20~340		10~250				
Professional Quality adjustable Torque Wrench											
1/4"		±4%	±4%	34223 series	5~25	10~250		caved scale	regular lock / screw lock	Professional level	162
3/8"				34323 series	5~110		5~80				
1/2"				34423 series	42~350		30~250				
72 PT Industry Quality Adjustable Torque Wrench											
3/8"		±2%	±4%	34367 & 34387	Nm 27~135 kg.cm 275~1376	in.lb 239~1195 kg.m 2.75~13.76	ft.lb 19.9~99.6	Operation Mode	LCD display	Professional level	163
1/2"				34467 & 34487	Nm 40~200 kg.cm 408~2038	in.lb 354~1170 kg.m 4.08~20.38	ft.lb 29.5~147.5				

Torque Wrench

Industry Quality Adjustable Torque Wrench

Design for easy torque-adjusting
Quality accords to DIN ISO 6789 & ASME B107.14M-2004
Tolerance of torque ±3%
CW/CCW Direction

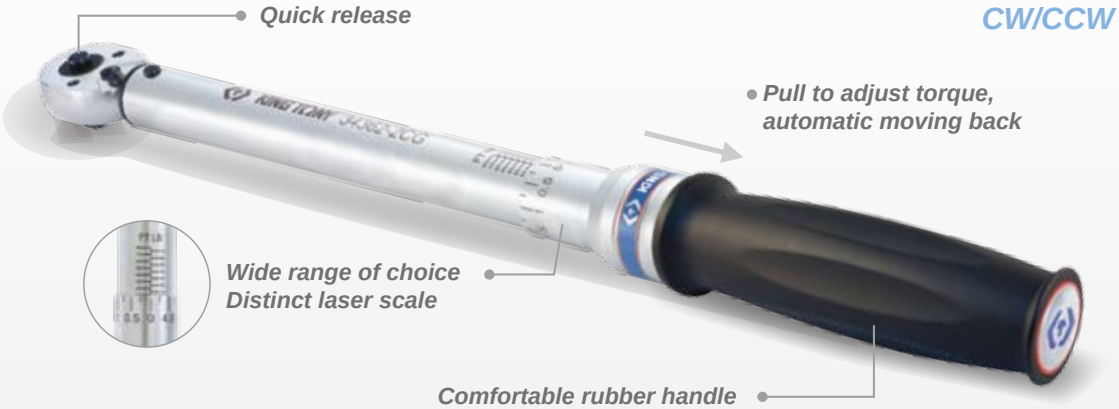

Dual Scale - English & Newton Meter (in. lb. / ft. lb. & Nm)

	Square drive	Torque Range in. lb. / ft. lb.	Incr.	Torque Range Nm	Incr.	Overall Length mm		
34262-1CG	1/4"	30~200 in. lb.	1 in. lb.	4.0~22.0 Nm	0.12 Nm	324	640	1/12
34362-1CG	3/8"	30~200 in. lb.	1 in. lb.	4.0~22.0 Nm	0.12 Nm	324	640	1/12
34362-2CG	3/8"	10~80 ft. lb.	0.5 ft. lb.	16.9~105.1 Nm	0.7 Nm	435	1300	1/12
34462-1CG	1/2"	20~150 ft. lb.	1 ft. lb.	34~197 Nm	1.4 Nm	521	1590	1/12
34462-2CG	1/2"	30~250 ft. lb.	1 ft. lb.	47~332 Nm	1.4 Nm	613	1810	1/12
34662-1CG	3/4"	50~450 ft. lb.	5 ft. lb.	102~576 Nm	6.8 Nm	1048	5500	1/2
34662-2CG	3/4"	100~600 ft. lb.	5 ft. lb.	169~779 Nm	6.8 Nm	1234	5600	1/2
34662-3CG	3/4"	150~750 ft. lb.	5 ft. lb.	237~983 Nm	6.8 Nm	1238	6150	1/2
34862-1CG	1"	150~750 ft. lb.	5 ft. lb.	237~983 Nm	6.8 Nm	1238	6150	1/2

Single scale - Newton Meter (Nm)

	Square drive	Torque Range Nm	Incr.	Overall Length mm		
34262-1DG	1/4"	4~20 Nm	0.1 Nm	324	640	1/12
34262-2DG	1/4"	2~10 Nm	0.1 Nm	281	560	1/12
34262-3DG	1/4"	5~30 Nm	0.5 Nm	325	640	1/12
34362-1DG	3/8"	4~20 Nm	0.1 Nm	324	640	1/12
34362-2DG	3/8"	20~100 Nm	0.5 Nm	435	1300	1/12
34362-3DG	3/8"	10~60 Nm	0.5 Nm	435	1300	1/12
34462-1DG	1/2"	40~200 Nm	1 Nm	521	1590	1/12
34462-2DG	1/2"	60~340 Nm	2 Nm	613	1810	1/12
34662-1DG	3/4"	100~600 Nm	5 Nm	1048	5500	1/2
34662-2DG	3/4"	150~800 Nm	5 Nm	1234	5600	1/2
34662-3DG	3/4"	200~1000 Nm	5 Nm	1238	6150	1/2
34862-1DG	1"	200~1000 Nm	5 Nm	1238	6150	1/2

Single scale - English (in.lb./ft.lb.)

	Square drive	Torque Range in. lb. / ft. lb.	Incr.	Overall Length mm		
34262-1EG	1/4"	30~200 in. lb.	1 in. lb.	324	640	1/12
34362-1EG	3/8"	30~200 in. lb.	1 in. lb.	324	640	1/12
34362-2EG	3/8"	10~80 ft. lb.	0.5 ft. lb.	435	1300	1/12
34462-1EG	1/2"	20~150 ft. lb.	1 ft. lb.	521	1590	1/12
34462-2EG	1/2"	30~250 ft. lb.	1 ft. lb.	613	1810	1/12
34662-1EG	3/4"	50~450 ft. lb.	5 ft. lb.	1048	5500	1/2
34662-2EG	3/4"	100~600 ft. lb.	5 ft. lb.	1234	5600	1/2
34662-3EG	3/4"	150~750 ft. lb.	5 ft. lb.	1238	6150	1/2
34862-1EG	1"	150~750 ft. lb.	5 ft. lb.	1238	6150	1/2

Dual Scale - Newton Meter & English (Nm & ft. lb.)

	Square drive	Torque Range Nm	Incr.	Torque Range ft. lb.	Incr.	Overall Length mm		
34462-1FG	1/2"	40~200 Nm	1 Nm	33.2~143.8 ft. lb.	0.8 ft. lb.	521	1590	1/12
34462-2FG	1/2"	60~340 Nm	2 Nm	51.6~243.4 ft. lb.	1.5 ft. lb.	613	1720	1/12

Dual Scale - Kilogram-force Centimeter & Newton Meter (kgf.cm & Nm)

	Square drive	Torque Range kgf.cm	Incr.	Torque Range Nm	Incr.	Overall Length mm		
34422-3GG	1/2"	200~1000 Kgf.cm	5 Kgf.cm	22.1~95.6 Nm	0.5 Nm	435	1300	1/12
34422-1GG	1/2"	400~2000 Kgf.cm	10 Kgf.cm	44.1~191.2 Nm	1 Nm	521	1590	1/12



Certificate of calibration

Testing is in compliance with International standards with test equipment and reference standards calibrated by a laboratory traceable to International standards.

1 N.M. = 0.738 ft.lb. = 0.102 kgf.m
1 ft.lb. = 1.356 N.M. = 0.138 kgf.m
1 in.lb. = 0.113 N.M. = 1.152 kgf.cm

	RENEWAL KITS
34262-1DK	
34362-1DK 34362-2DK	
34462-1DK 34462-2DK	
34662-1DK 34662-2DK 34662-3DK	
34862-1DK	

CAUTION

1. Do not use this torque wrench over its scale range.
2. Do not use this torque wrench as a normal hand tool.
3. Torque wrench need to be calibrated periodically for accuracy.

Mini-type Industry Quality Torque Wrench

Industrial application
Quality accords to DIN ISO 6789 & ASME B107.14M-2004
Tolerance of torque ±3%
CW/CCW Direction

Single scale - Newton Meter (Nm)

	Square drive	Torque Range Nm	Incr.	Overall Length mm		
3426C-1DF	1/4"	3~15 Nm	0.1 Nm	210	380	24
3426C-2DF	1/4"	5~25 Nm	0.2 Nm	248	417	24
3436C-1DF	3/8"	3~15 Nm	0.1 Nm	205	389	24
3436C-2DF	3/8"	5~25 Nm	0.2 Nm	240	425	24

	RENEWAL KITS
3426C-1DK 3426C-2DK	
3436C-1DK 3436C-2DK	

Industry Quality Adjustable Torque Wrench

Design for easy torque-adjusting
Quality accords to DIN ISO 6789 & ASME B107.14M-2004
Tolerance of torque ±3%
CW/CCW Direction

34862-2CG, 34862-2DF
34862-2EG, 34862-2FF

34862-2CF, 34862-2DG
34862-2EF, 34862-2FG

Dual Scale - English & Newton Meter (in. lb. / ft. lb. & Nm)

	Square drive	Torque Range ft. lb.	Incr.	Torque Range Nm	Incr.	Overall Length mm		
34862-2CG	1"	200~1000 ft. lb.	5 ft. lb.	305~1322 Nm	6.8 Nm	1850	12200	1/2
34862-2CF	1"	200~1000 ft. lb.	5 ft. lb.	305~1322 Nm	6.8 Nm	1850	12200	1/2

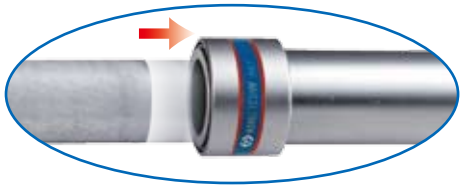

Single scale - Newton Meter (Nm)

	Square drive	Torque Range Nm	Incr.	Overall Length mm		
34862-2DF	1"	300~1500 Nm	10 Nm	1850	12200	1/2
34862-2DG	1"	300~1500 Nm	10 Nm	1850	12200	1/2

Single scale - English (in.lb./ft.lb.)

	Square drive	Torque Range ft. lb.	Incr.	Overall Length mm		
34862-2EG	1"	200~1000 ft. lb.	5 ft. lb.	1850	12200	1/2
34862-2EF	1"	200~1000 ft. lb.	5 ft. lb.	1850	12200	1/2

Dual Scale - Newton Meter & English (Nm & ft. lb.)

	Square drive	Torque Range Nm	Incr.	Torque Range ft. lb.	Incr.	Overall Length mm		
34862-2FF	1"	300~1500 Nm	10 Nm	258~1070 ft. lb.	7.4 ft. lb.	1850	12200	1/2
34862-2FG	1"	300~1500 Nm	10 Nm	258~1070 ft. lb.	7.4 ft. lb.	1850	12200	1/2

	RENEWAL KITS
34862-2DK	

CAUTION

1. Do not use this torque wrench over its scale range.
2. Do not use this torque wrench as a normal hand tool.
3. Torque wrench need to be calibrated periodically for accuracy.

Torque Wrench

72 Teeth Industry Quality Adjustable Torque Wrench

Colorful quick release button design
Fixed head version allows using in narrow spaces
Quality accords to DIN ISO 6789 & ASME B107.14M-2004
Tolerance of torque ±3%
CW/CCW Direction

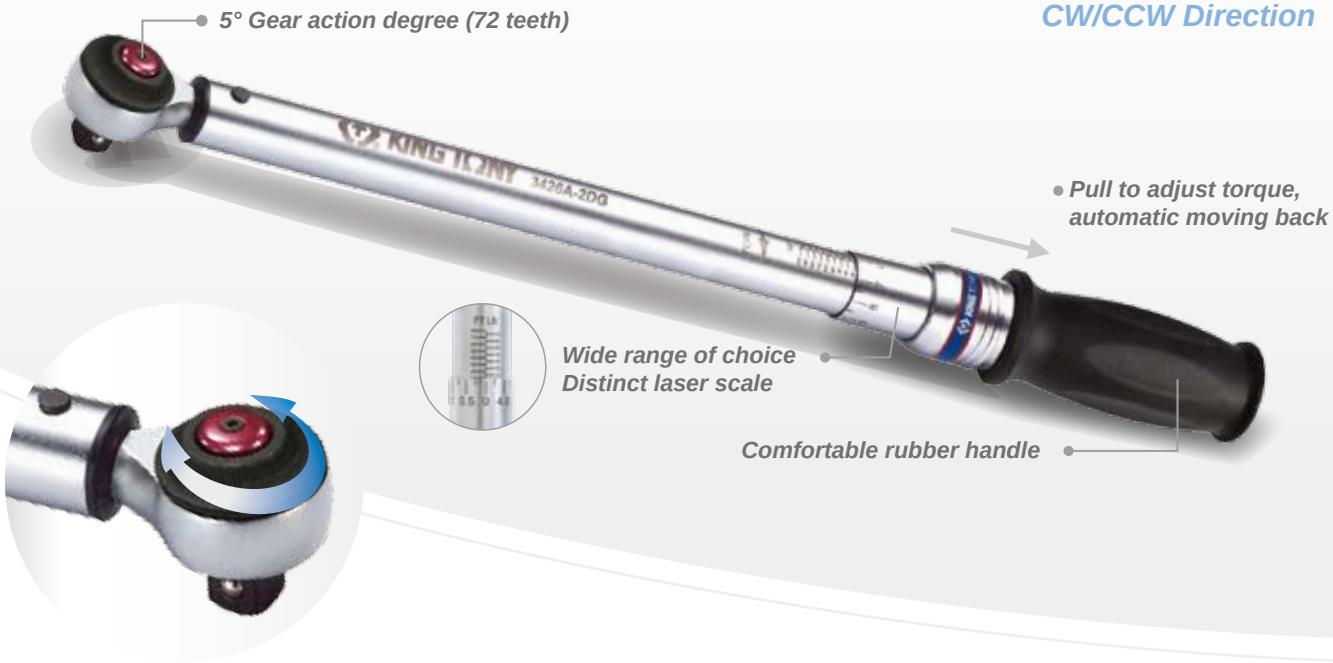

Single scale - Newton Meter (Nm)

	Square drive	Torque Range Nm	Incr.	Total Length mm		
3426A-1DG	1/4"	2~10 Nm	0.1 Nm	285	560	1/24
3426A-2DG	1/4"	4~20 Nm	0.1 Nm	325	640	1/24
3436A-2DG	3/8"	20~100 Nm	0.5 Nm	430	1300	1/24
3446A-1DG	1/2"	40~200 Nm	1 Nm	490	1460	1/12
3446A-2DG	1/2"	60~340 Nm	2 Nm	590	1750	1/12

Single scale - English (in.lb./ft.lb.)

	Square drive	Torque Range in. lb. / ft. lb.	Incr.	Total Length mm		
3426A-1EG	1/4"	20~100 in. lb.	1 in. lb.	285	560	560
3426A-2EG	1/4"	30~200 in. lb.	1 in. lb.	325	640	640
3436A-2EG	3/8"	10~80 ft. lb.	0.5 ft. lb.	430	1300	1300
3446A-1EG	1/2"	20~150 ft. lb.	1 ft. lb.	490	1460	1460
3446A-2EG	1/2"	30~250 ft. lb.	1 ft. lb.	590	1750	1750

	RENEWAL KITS
3426A-1DK 3426A-2DK	
3436A-2DK	
3446A-1DK 3446A-2DK	

CAUTION

1. Do not use this torque wrench over its scale range.
2. Do not use this torque wrench as a normal hand tool.
3. Torque wrench need to be calibrated periodically for accuracy.

Industry Quality Interchangeable Torque Wrench

Using standard insert head

Quality accords to DIN ISO 6789 & ASME B107.14M-2004

Positive button design which removes the insert head easily

Tolerance of torque ±3%

CW/CCW Direction

Dual Scale - English & Newton Meter (in. lb. / ft. lb. & Nm)

KING TONY	Size mm	Torque Range in.lb. / ft.lb.	Incr.	Torque Range Nm	Incr.	Total Length (mm)	kg	/
34512-1CG	9x12	20~100 in.lb.	1 in.lb	2.8~10.7 Nm	0.12 Nm	261	510	1 / 12
34512-2CG	9x12	30~200 in.lb.	1 in.lb	4.0~22.0 Nm	0.12 Nm	306	590	1 / 12
34512-3CG	9x12	10~80 ft.lb.	0.5 ft.lb	16.9~105.1 Nm	0.7 Nm	430	1270	1 / 12
34522-1CG	14x18	10~80 ft.lb.	0.5 ft.lb	16.9~105.1 Nm	0.7 Nm	430	1270	1 / 12
34522-2CG	14x18	20~150 ft.lb.	1 ft.lb	34~197 Nm	1.4 Nm	485	1410	1 / 12
34522-3CG	14x18	30~250 ft.lb.	1 ft.lb	47~332 Nm	1.4 Nm	580	1590	1 / 12

Single scale - English (in.lb./ft.lb.)

KING TONY	Size mm	Torque Range in.lb. / ft.lb.	Incr.	Total Length (mm)	kg	/
34512-1EG	9x12	20~100 in.lb.	1 in.lb	261	510	1 / 12
34512-2EG	9x12	30~200 in.lb.	1 in.lb	306	590	1 / 12
34512-3EG	9x12	10~80 ft.lb.	0.5 ft.lb	430	1270	1 / 12
34522-1EG	14x18	10~80 ft.lb.	0.5 ft.lb	430	1270	1 / 12
34522-2EG	14x18	20~150 ft.lb.	1 ft.lb	485	1410	1 / 12
34522-3EG	14x18	30~250 ft.lb.	1 ft.lb	580	1590	1 / 12

Single scale - Newton Meter (Nm)

KING TONY	Size mm	Torque Range Nm	Incr.	Total Length (mm)	kg	/
34512-1DG	9x12	2~10 Nm	0.1Nm	261	510	1 / 12
34512-2DG	9x12	4~20 Nm	0.1Nm	306	590	1 / 12
34512-4DG	9x12	10~60 Nm	0.5Nm	306	590	1 / 12
34512-3DG	9x12	20~100 Nm	0.5Nm	430	1270	1 / 12
34522-1DG	14x18	20~100 Nm	0.5Nm	430	1270	1 / 12
34522-2DG	14x18	40~200 Nm	1Nm	485	1410	1 / 12
34522-3DG	14x18	60~340 Nm	2Nm	580	1590	1 / 12

Dual Scale - Newton Meter & English (Nm & ft. lb.)

KING TONY	Size mm	Torque Range Nm	Incr.	Torque Range in.lb. / ft.lb.	Incr.	Total Length (mm)	kg	/
34512-1FG	9x12	2~10 Nm	0.1 Nm	22.1~84.1 in.lb.	0.9 in.lb	261	510	1 / 12
34512-2FG	9x12	4~20 Nm	0.1 Nm	39.8~172.6 in.lb.	0.9 in.lb	306	590	1 / 12
34512-3FG	9x12	20~100 Nm	0.5 Nm	16.6~71.9 ft.lb.	0.4 ft.lb	430	1270	1 / 12
34522-1FG	14x18	20~100 Nm	0.5 Nm	16.6~71.9 ft.lb.	0.4 ft.lb	430	1270	1 / 12
34522-2FG	14x18	40~200 Nm	1 Nm	33.2~143.8 ft.lb.	0.8 ft.lb	485	1410	1 / 12
34522-3FG	14x18	60~340 Nm	2 Nm	51.6~243.4 ft.lb.	1.5 ft.lb	580	1590	1 / 12

CAUTION

1. Do not use this torque wrench over its scale range.
2. Do not use this torque wrench as a normal hand tool.
3. Torque wrench need to be calibrated periodically for accuracy.

Insert Tool

- Chrome-plated.

345031 & 345032

- Ratchet Insert tool

KING TONY	Size	mm	Lw* (mm)	L (mm)	g	
34503102R	1/4"DR	9x12	17.5	46.0	71	12 / 192
34503103R	3/8"DR	9x12	26.0	58.5	106	10 / 160
34503203R	3/8"DR	14x18	27.0	70.5	218	6 / 96
34503204R	1/2"DR	14x18	27.0	70.5	256	6 / 96

345031



345032

345011 & 345012

- Open ended Insert Tool

345011



345012

KING TONY	Size mm / inch	mm	Lw* (mm)	L (mm)	g	
34501107M	7	9x12	17.5	37.4	36.9	12 / 192
34501108M	8	9x12	17.5	37.9	37.6	12 / 192
34501109M	9	9x12	17.5	37.9	37.2	12 / 192
34501110M	10	9x12	17.5	38.2	41.5	12 / 192
34501111M	11	9x12	17.5	39.0	39.7	12 / 192
34501112M	12	9x12	17.5	39.0	40.7	12 / 192
34501113M	13	9x12	17.5	39.3	45.6	12 / 192
34501114M	14	9x12	20	43.1	54.9	12 / 192
34501115M	15	9x12	20	43.4	55.5	12 / 192
34501116M	16	9x12	20	43.9	57.9	12 / 192
34501117M	17	9x12	20	44.4	58	12 / 192
34501118M	18	9x12	20	45.3	59.7	12 / 192
34501119M	19	9x12	20	45.0	64	12 / 192
NEW 34501108S	1/4	9x12	17.5	37.4	36.9	12 / 192
NEW 34501110S	5/16	9x12	17.5	37.9	38	12 / 192
NEW 34501112S	3/8	9x12	17.5	38.2	39	12 / 192
NEW 34501114S	7/16	9x12	17.5	39.0	41	12 / 192
NEW 34501116S	1/2	9x12	17.5	39.3	43	12 / 192
NEW 34501118S	9/16	9x12	20	43.1	53	12 / 192
NEW 34501120S	5/8	9x12	20	43.9	57	12 / 192
NEW 34501122S	11/16	9x12	20	44.4	62	12 / 192
NEW 34501124S	3/4	9x12	20	45.0	65	12 / 192

KING TONY	Size	mm	Lw* (mm)	L (mm)	g	
34501213M	13	14x18	25	58.2	117.3	12 / 192
34501214M	14	14x18	25	58.4	120	12 / 192
34501215M	15	14x18	25	58.4	116.4	12 / 192
34501216M	16	14x18	25	59.4	127.5	10 / 160
34501217M	17	14x18	25	60.2	138.2	10 / 160
34501218M	18	14x18	25	60.7	136.2	10 / 160
34501219M	19	14x18	25	61.1	140	10 / 160
34501221M	21	14x18	25	61.0	160.1	6 / 96
34501222M	22	14x18	25	62.5	162.9	6 / 96
34501224M	24	14x18	25	63.7	168.6	6 / 96
34501227M	27	14x18	32.5	69.0	239.4	6 / 96
34501230M	30	14x18	32.5	70.2	249.5	6 / 96
34501232M	32	14x18	32.5	73.0	248.2	6 / 72
34501234M	34	14x18	32.5	74.8	252.5	6 / 72
34501236M	36	14x18	32.5	75.1	244.8	6 / 72
34501238M	38	14x18	32.5	74.4	229.8	6 / 72
34501241M	41	14x18	40	79.0	315.9	6 / 72

Insert Tool

- Chrome-plated.

345021 & 345022

- Ring Insert tool

345021



345022

KING TONY	Size mm / inch	▭ mm	Lw* (mm)	L (mm)	g	/
34502107M	7	9x12	17.5	39.8	37.4	12 / 288
34502108M	8	9x12	17.5	40.5	36.9	12 / 288
34502110M	10	9x12	17.5	41.6	39.4	12 / 288
34502111M	11	9x12	17.5	43.3	42.0	12 / 288
34502112M	12	9x12	17.5	43.8	51.1	12 / 288
34502113M	13	9x12	17.5	44.5	51.3	12 / 288
34502114M	14	9x12	17.5	45.2	52.9	12 / 288
34502115M	15	9x12	17.5	45.9	53.6	12 / 288
34502116M	16	9x12	17.5	46.3	56.2	12 / 288
34502117M	17	9x12	17.5	47.0	55.3	12 / 192
34502118M	18	9x12	17.5	47.4	60.0	12 / 192
34502119M	19	9x12	17.5	49.2	63.4	12 / 192
34502121M	21	9x12	17.5	50.3	68.2	12 / 192
34502122M	22	9x12	17.5	51.2	70.6	12 / 192
NEW 34502108S	1/4	9x12	17.5	39.8	38	12 / 288
NEW 34502110S	5/16	9x12	17.5	40.5	37	12 / 288
NEW 34502112S	3/8	9x12	17.5	41.6	42	12 / 288
NEW 34502114S	7/16	9x12	17.5	43.3	41	12 / 288
NEW 34502116S	1/2	9x12	17.5	43.8	52	12 / 288
NEW 34502118S	9/16	9x12	17.5	45.2	53	12 / 288
NEW 34502120S	5/8	9x12	17.5	46.3	58	12 / 288
NEW 34502122S	11/16	9x12	17.5	47.0	62	12 / 192
NEW 34502124S	3/4	9x12	17.5	49.2	62	12 / 192

KING TONY	Size	▭ mm	Lw* (mm)	L (mm)	g	/
34502213M	13	14x18	25	62.2	129.6	12 / 192
34502214M	14	14x18	25	63.2	132.1	12 / 192
34502215M	15	14x18	25	63.3	132.0	12 / 192
34502216M	16	14x18	25	63.1	137.0	12 / 192
34502217M	17	14x18	25	65.0	141.0	12 / 192
34502218M	18	14x18	25	65.0	138.9	10 / 160
34502219M	19	14x18	25	66.7	144.6	10 / 160
34502221M	21	14x18	25	67.3	151.5	10 / 160
34502222M	22	14x18	25	68.5	156.6	6 / 96
34502224M	24	14x18	25	69.9	161.9	6 / 96
34502227M	27	14x18	32.5	78.0	204.9	6 / 96
34502230M	30	14x18	32.5	79.6	204.1	6 / 96
34502232M	32	14x18	32.5	81.0	213.8	6 / 96
34502234M	34	14x18	32.5	82.4	225.5	6 / 90
34502236M	36	14x18	32.5	83.7	230.0	6 / 90
34502241M	41	14x18	40	86.6	235.2	6 / 90

Interchangeable Torque Wrench Set

34520
34510

KING TONY	mm	Contents										kg	
345201D11MR	14x18		34522-1DG		34503203R	345012	13 14 15 17 19 22 24 27 30					3.7	1 / 6
345202D11MR			34522-2DG		34503204R							3.8	1 / 6
345203D11MR			34522-3DG		34503204R							4	1 / 6
345201E11MR			34522-1EG		34503203R							3.7	1 / 6
345202E11MR			34522-2EG		34503204R							3.8	1 / 6
345203E11MR			34522-3EG		34503204R							4	1 / 6

KING TONY	mm	Contents										kg	
345102D08MR	9X12		34512-2DG		34503102R	345011	10 13 17	345021	10 13 17			1.3	1 / 18
345104D08MR			34512-4DG		34503103R							1.3	1 / 18
345101E08MR			34512-1EG		34503102R							1.2	1 / 18
345102E08MR			34512-2EG		34503102R							1.3	1 / 18

Torque Wrench

Professional Quality Adjustable Torque Wrench

Quality accords to DIN ISO 6789 & ASME B107.14M-2004

Tolerance of torque ±4%

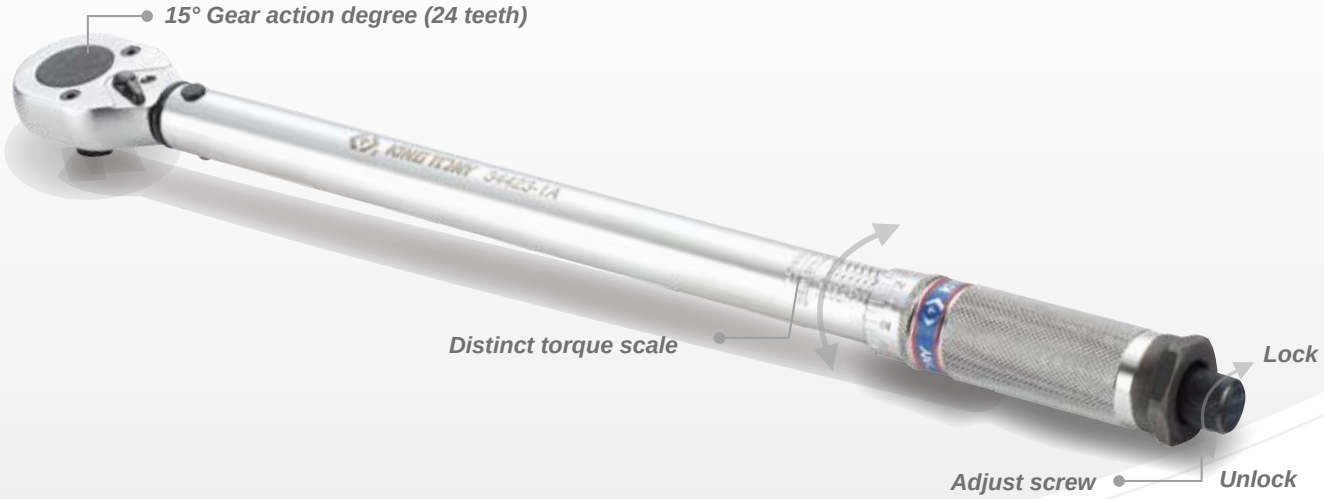

Recyclable cylindrical package



Dual Scale - Newton Meter & Kilogram-force Centimeter / Kilogram-force meter (Nm & kgf.cm / kgf.m)

	Square drive	Torque Range Nm	Incr.	Torque Range kgf.cm / kgf.m	Incr.	Total Length mm		
34223-1A	1/4"	5~25 Nm	0.1 Nm	45~255 kgf.cm	1 kgf.cm	280	595	1/12
34323-1A	3/8"	5~25 Nm	0.1 Nm	45~255 kgf.cm	1 kgf.cm	280	595	1/12
34323-2A	3/8"	20~110 Nm	1 Nm	2.04~11.22 kgf.m	0.1 kgf.m	370	820	1/12
34423-1A	1/2"	42~210 Nm	1 Nm	4.3~21.4 kgf.m	0.41 kgf.m	450	1340	1/12
34423-2A	1/2"	50~350 Nm	1 Nm	5.1~35.7 kgf.m	0.1kgf.m	570	2400	1/12

Dual Scale - English & Kilogram-force Centimeter / Kilogram-force meter (in. lb. / ft. lb. & kgf.cm / kgf.m)

	Square drive	Torque Range in. lb. / ft. lb.	Incr.	Torque Range kgf.cm / kgf.m	Incr.	Total Length mm		
34223-1B	1/4"	25~250 in. lb.	1 in. lb.	29~288 kgf.cm	1.13 kgf.cm	280	595	1/12
34323-1B	3/8"	25~250 in. lb.	1 in. lb.	29~288 kgf.cm	1.13 kgf.cm	280	595	1/12
34323-2B	3/8"	5~80 ft. lb.	0.5 ft. lb.	0.7~11.10 kgf.m	0.07 kgf.m	370	820	1/12
34423-1B	1/2"	10~150 ft. lb.	1 ft. lb.	1.4~20.7 kgf.m	0.14 kgf.m	450	1340	1/12
34423-2B	1/2"	30~250 ft. lb.	2 ft. lb.	4.2~34.6 kgf.m	0.27 kgf.m	570	2400	1/12

Dual Scale - English & Newton Meter (in. lb. / ft. lb. & Nm)

	Square drive	Torque Range in. lb. / ft. lb.	Incr.	Torque Range Nm	Incr.	Total Length mm		
34223-1C	1/4"	25~250 in. lb.	1 in. lb.	2.8~28.3 Nm	0.17 Nm	280	595	1/12
34423-1C	1/2"	10~150 ft. lb.	1 ft. lb.	13.6~203.4 Nm	1.35 Nm	450	1658	1/12

Certificate of calibration

Testing is in compliance with International standards with test equipment and reference standards calibrated by a laboratory traceable to International standards.



1 N.M. = 0.738 ft.lb. = 0.102 kgf.m
1 ft.lb. = 1.356 N.M. = 0.138 kgf.m
1 in.lb. = 0.113 N.M. = 1.152 kgf.cm

	RENEWAL KITS
34223-1DK	
34323-1DK 34323-2DK	
34423-1DK 34423-2DK	

CAUTION

1. Do not use this torque wrench over its scale range.
2. Do not use this torque wrench as a normal hand tool.
3. Torque wrench need to be calibrated periodically for accuracy.

Electronic Torque Wrench

NEW Electronic Torque Wrench

Electronic torque value readout
CW +/- 2% and CCW +/- 3% operation
DIN ISO 6789-2003 & ASME B107.28-2005
Peak hold and track mode selectable
Buzzer and LED indicator for presettable target torque
Engineering units (Nm, ft.lb, in.lb, kgf.cm,kgf.m) adjustable
Auto shut off after about 80 seconds
Angle accuracy (34387/34487)

CE

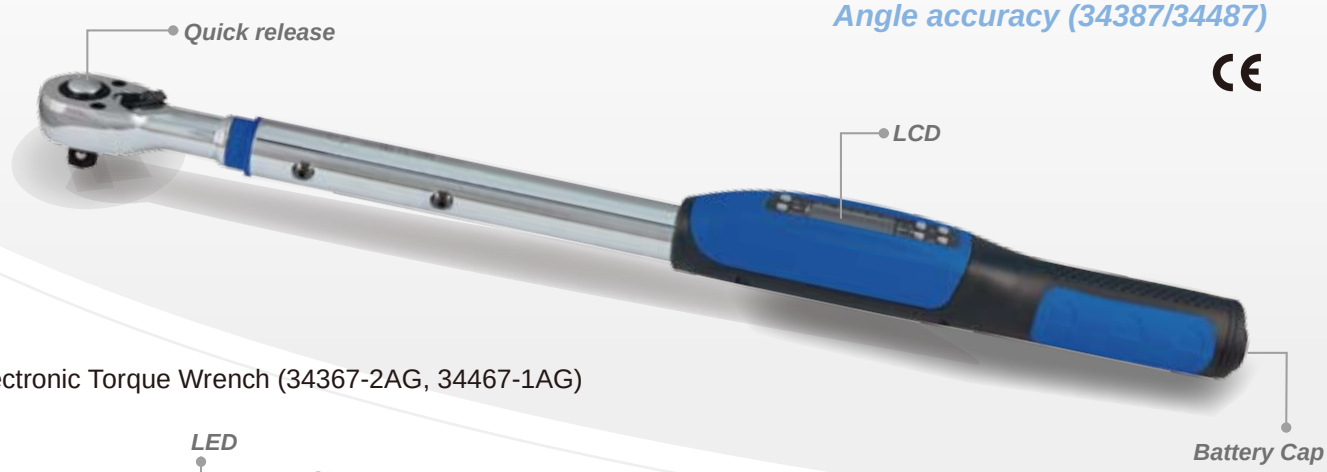

Electronic Torque Wrench (34367-2AG, 34467-1AG)

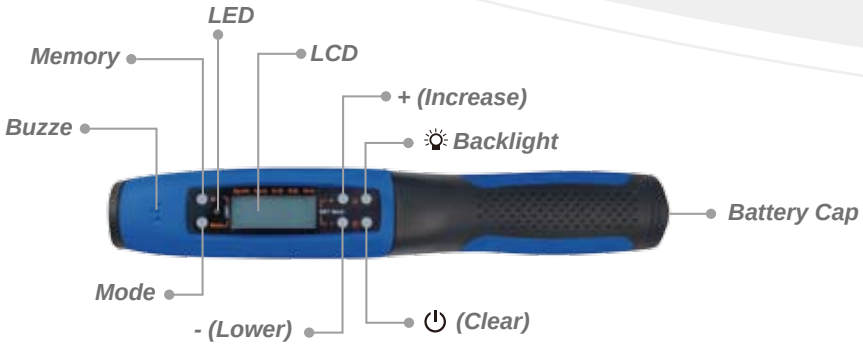

Electronic Torque Angle-controlled Wrench (34387-2AG, 34487-1AG)

	Square drive	Torque Range Nm	ft. lb.	in. lb	kg.cm	kg.m	Total Length mm		
34367-2AG	3/8"	27-135 Nm	19.9-99.6 ft. lb.	239~1195 in. lb.	275~1376 kgf.cm	2.75~13.76 kgf.m	460	1400	1/12
34467-1AG	1/2"	40-200 Nm	29.5-147.5 ft. lb.	354~1770in. lb.	408~2038 kgf.cm	4.08~20.38 kgf.m	530	1500	1/12
34387-2AG	3/8"	27-135 Nm	19.9-99.6 ft. lb.	239~1195 in. lb.	275~1376 kgf.cm	2.75~13.76 kgf.m	460	1400	1/12
34487-1AG	1/2"	40-200 Nm	29.5-147.5 ft. lb.	354~1770in. lb.	408~2038 kgf.cm	4.08~20.38 kgf.m	530	1500	1/12

Torque Accuracy	CW ± 2% CCW ± 3%
Memory	50
Display resolution	0.1 Nm/ft.lb. ,0.01 kgf.m, 1.0 lb.in/ kg.cm
Operation Mode	Peak/Track
Unit Selection	kg.cm, kg.m, lb.in, lb.ft, Nm
Gear Teeth	36
Buttons	6
Battery	AA x 2
Battery Life	110 hrs (continuous operation)
Operating Ambient Temperature	-10ºC- 60ºC (13.9ºF-139.9ºF)
Storage Temperature	-20ºC-70ºC (-4ºF-157.9ºF)
Operating relative humidity	15 to 90% noncondensing
Auto shut off	80 seconds (if do not use ratchet.)
Angle Accuracy	(±1% of reading)+(±1%@angular velocity >10º/sec < 180º/sec)+ (±1% of Text Texture)
Angle	0º~360º (34387-2AG,34487-1AG)

CAUTION

Important Safeguards

1. Do not press "M" and " ⏻ " button together please.
2. The system will enter into Calibration Mode.
3. Tun off power please.

Electronic Torque Adapter

34207-1A &34307-1A & 34407-1A NEW

CE

Product Specifications:

Accuracy	±2%
Memory	50
Display resolution	0.1 Nm /ft.lb. ,0.01 kgf.m
Operation Mode	Peak/Track
Unit Selection	kgf.m , ft.lb. , Nm
Battery	CR2032 x 1 pcs
Battery Life	110hrs (continuous operation)
Operating Ambient Temperature	-10ºC - 60ºC (13.9ºF - 139.9ºF)
Storage Temperature	-20ºC - 70ºC (-4ºF - 157.9ºF)
Operating relative humidity	15 to 90% noncondensing
Auto shut off	80 seconds (if do not use electronic torque adapter.)
LED indicator	Green. Yellow. Red
Overload Alarm	34207-1A: 37.5 Nm (27.6 ft.lb.) 34307-1A: 168.8 Nm(124.5 ft.lb.) 34407-1A: 250 Nm (184.4 ft.lb.)

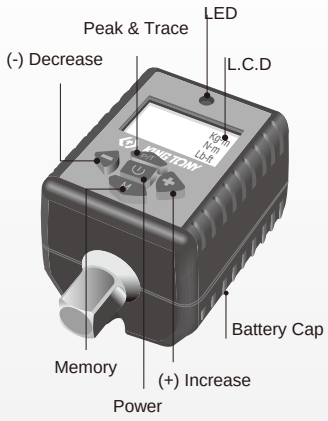

	Square drive	Torque Range Nm	Torque Range ft. lb.	Torque Range kgf.m	Size		
34207-1A	1/4"	6~30 Nm	4.4~22.1ft.lb.	0.61~3.06 kgf.m	L75 x W45mm	124	1 / 48
34307-1A	3/8"	27~135 Nm	19.9~99.6 ft.lb.	2.75~13.76 kgf.m	L75 x W45mm	198	1 / 48
34407-1A	1/2"	40~200 Nm	29.5~147.5 ft.lb.	4.08~20.38 kgf.m	L75 x W45mm	198.5	1 / 48

CAUTION

1. Do not use this torque wrench over its scale range.
2. Do not use this torque wrench as a normal hand tool.
3. Torque wrench need to be calibrated periodically for accuracy.

CE

34607-1A NEW

Product Specifications:

Accuracy	±2%
Memory	50
Display resolution	0.1 Nm /ft.lb. ,0.01 kgf.m
Operation Mode	Peak/Track
Unit Selection	kgf.m , ft.lb. , Nm
Battery	AA x 2 pcs
Battery Life	110hrs (continuous operation)
Operating Ambient Temperature	-10ºC - 60ºC (13.9ºF - 139.9ºF)
Storage Temperature	-20ºC - 70ºC (-4ºF - 157.9ºF)
Operating relative humidity	15 to 90% noncondensing
Auto shut off	80 seconds (if do not use electronic torque adapter.)
LED indicator	Green. Yellow. Red
Overload Alarm	625 Nm (461 ft.lb.)

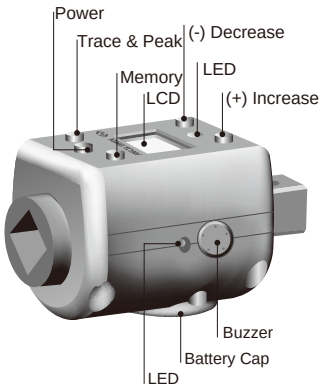

	Square drive	Torque Range Nm	Torque Range ft. lb.	Torque Range kgf.m	Size		
34607-1A	3/4"	100 ~500 Nm	73.8~368.8 .ft.lb.	10.19~50.95 kgf.m	L110 x W56 mm	585	1 / 24

CAUTION

1. Do not use this torque wrench over its scale range.
2. Do not use this torque wrench as a normal hand tool.
3. Torque wrench need to be calibrated periodically for accuracy.

Torque Screwdriver

34111

- Tolerance of torque ±5% quality meets DIN ISO 6789 & ASME B107.14M-2004
- 6.3mm (1/4") Hex driver for bit
- Automatic adjustment knob design
- Easy-to-read laser scale
- Ergonomic comfort rubber grip

Aluminum alloy

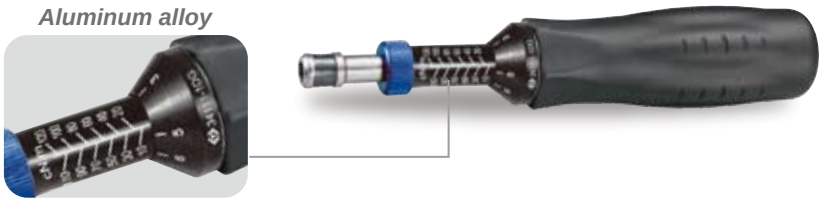

	SIZE	Torque Range cNm / Nm / in-lb	Incr.	Total Length mm	g	
34111-1DG	1/4"	10~120 cNm	1 cNm	180	207	1/24
34111-1EG	1/4"	3~15 in-lb	0.1 in-lb	180	207	1/24
34111-2DG	1/4"	1~6 Nm	0.1 Nm	248	475	1/24
34111-2EG	1/4"	10~50 in-lb	0.5 in-lb	248	475	1/24

Torque Angle Gauge

34440 34660

- Square Drive :
  34440 (1/2" x 1/2")
  34660 (3/4" x 3/4")
- 360° angle scale- clearly marked in 2° increments, and in intervals of 10° and 30°.
- Indicator etched on clear plastic plate-protects angle scale from dirt and grease.
- Adjustable arm keeps angle scale stationary.
- Arm has two lengths for additional flexibility in placement against components.
- Tough composite dial and rotating index allow operator to accurately tighten fixing to manufacturers exact standard.

34440 34660

	spec.	g	
34440	1/2"Fx1/2"M	190	1 / 20
34660	3/4"Fx3/4"M	623	1 / 12

Torque Multiplier

34688

- Torque multiplication with 1:5, accuracy guaranteed better than ±5%.
- Reaction bar supplied in two styles for maximum versatility.
- Ideal construction offers minimal maintenance and extended life.
- Portable package brings convenience for use in different working places.









Set contents:

Multiplier head 1 pc 34688-05A

Reaction bar 2 pc 34688-P01 34688-P02

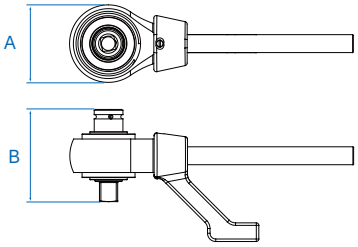

	Ratio	Input Square	Output Square	Max Input Torque Nm / lbf.ft	Max Output Torque Nm / lbf.ft	A mm	B mm	kg	
34688	1:5	3/4"	1"	-	2700 / 2000	108	128.1	7.4	1 / 2

Professional Torque Tester

ZV001

- Features:

Calibration range	40~400 Nm
Display	5 effective digits max.
Accuracy	±1%
Units of measurement	Lb-in, Lb-ft, Kg-cm, Nm
Operating temperature Range	+5°C~+40°C
Storage temperature range	0°C~+50°C
Max. operating humidity	25~85 % RH
Power Supply	90~260 Volts a.c. at 50-60 Hz input.
Power consumption	Less than 1.5 W
Power cable	1800 mm
Base materials/ Finish	Aluminum Alloy/ Anodization
Dimensions	820(L)x435(W)x320(H) mm
PC conection	RS 232

	kg	
ZV001	57	1 / 1

Wrench

- Wrench & Special Purpose Wrench
- T-shaped Driver & T-type Plug Socket
- T-type Universal Joint & Socket Wrench

Combination Wrench

1060
5060

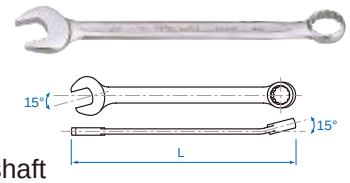

- European slimline type
- 15° open ended angle
- 15° ring end offset from shaft
- Chrome vanadium steel
- Chrome plated
- Metric size - DIN3113 ,ISO 7738
- Inch size -ANSI/ASME B107.6

KING TONY	Size mm / inch	L (mm)	g	
1060-55	5.5	105	16	12 / 504
1060-06	6.0	105	18	12 / 504
1060-07	7.0	115	20	12 / 504
1060-08	8.0	125	25	12 / 504
1060-09	9.0	135	34	12 / 504
1060-10	10.0	145	39	12 / 504
1060-11	11.0	155	46	12 / 504
1060-12	12.0	165	56	12 / 216
1060-13	13.0	175	69	12 / 216
1060-14	14.0	185	80	12 / 216
1060-15	15.0	195	93	12 / 192
1060-16	16.0	205	111	12 / 192
1060-17	17.0	215	119	12 / 192
1060-18	18.0	225	138	12 / 144
1060-19	19.0	235	158	12 / 144
1060-20	20.0	245	182	12 / 144
1060-21	21.0	255	203	12 / 96
1060-22	22.0	265	225	12 / 96
1060-23	23.0	275	251	12 / 96
1060-24	24.0	285	287	6 / 54
1060-25	25.0	295	326	6 / 54
1060-26	26.0	305	344	6 / 54
1060-27	27.0	315	371	6 / 54
1060-28	28.0	325	387	6 / 48
1060-29	29.0	335	456	6 / 48
1060-30	30.0	345	514	6 / 48
1060-32	32.0	365	557	6 / 48
5060-08	1/4	105	18	12 / 504
5060-10	5/16	125	25	12 / 504
5060-12	3/8	145	39	12 / 504
5060-14	7/16	155	46	12 / 504
5060-16	1/2	175	69	12 / 216
5060-18	9/16	185	80	12 / 216
5060-20	5/8	205	111	12 / 192
5060-22	11/16	215	119	12 / 192
5060-24	3/4	235	158	12 / 144
5060-26	13/16	255	203	12 / 96
5060-28	7/8	265	220	12 / 96
5060-30	15/16	285	287	6 / 54
5060-32	1	295	326	6 / 54
5060-34	1-1/16	315	371	6 / 54
5060-36	1-1/8	335	456	6 / 48
5060-40	1-1/4	365	557	6 / 48

8781007KT applied to 1060-55 ~1060-12 , 5060-08 ~ 5060-16

8781013KT applied to 1060-13 ~1060-23 , 5060-18 ~ 5060-28

8781032KT applied to 1060-24 ~1060-32 , 5060-30 ~ 5060-40

1071
5071



- Jumbo type
- 15° open ended angle
- 15° ring end offset from shaft
- Medium carbon steel
- Polished, chrome plated
- Metric size-DIN 3113 ,ISO 7738
- Inch size-ANSI/ASME B107.6

KING TONY	Size mm / inch	L (mm)	g	
1071-33	33	420	765	5 / 20
1071-34	34	420	745	5 / 20
1071-35	35	430	960	5 / 20
1071-36	36	430	960	5 / 20
1071-38	38	455	1155	5 / 20
1071-41	41	495	1402	5 / 15
1071-42	42	500	1394	5 / 15
1071-44	44	500	1479	5 / 15
1071-46	46	495	1515	5 / 15
1071-48	48	565	2550	5 / 10
1071-50	50	565	2550	5 / 10
5071-42	1-5/16	420	760	5 / 20
5071-44	1-3/8	430	970	5 / 20
5071-46	1-7/16	430	950	5 / 20
5071-48	1-1/2	455	1150	5 / 20
5071-50	1-9/16	500	1546	5 / 15
5071-52	1-5/8	500	1402	5 / 15
5071-54	1-11/16	500	1432	5 / 15
5071-56	1-3/4	500	1419	5 / 15
5071-58	1-13/16	500	1478	5 / 15
5071-60	1-7/8	565	2540	5 / 10
5071-62	1-15/16	565	2550	5 / 10
5071-64	2	565	2540	5 / 10

Stubby Combination Wrench

10D0

NEW

- Chrome vanadium alloy steel.
- Short pattern design enables greater access in confined spaces.
- Metric size - DIN3113

short pattern



KING TONY	Size mm	D1	D2	H1	H2	L (mm)	g	
10D0-10	10	20.5	15.5	4.8	6.4	95	27	20 / 360
10D0-11	11	22.7	16.7	5.9	7.9	100	45	20 / 360
10D0-12	12	24.7	18.0	6.2	8.3	105	49	20 / 360
10D0-13	13	27.2	19.1	6.5	8.7	110	59	20 / 360
10D0-14	14	28.8	21.4	7.0	9.2	115	65	15 / 270
10D0-15	15	31.0	22.4	7.4	9.7	120	73	15 / 270
10D0-16	16	33.0	23.8	7.8	10.3	125	85	15 / 270
10D0-17	17	35.0	26.2	8.1	10.7	130	116	15 / 180
10D0-18	18	37.0	27.3	8.6	11.3	135	123	15 / 180
10D0-19	19	39.0	28.6	9.0	11.8	140	135	12 / 144

Combination Wrench Set

1207 MR SR	1212 MR	1218 MR 01
1208 MR	1214 MR SR	1226 MR
1210 MR	1214 MR 01	1214 SR01
1211 MR SR	1215 MR	1216 SR
1211 SR 01	1215 MR 01	

Wallet sets:

KING TONY	PC./SET	Contents	kg	
1207MR	7	10 11 12 13 14 17 19	0.60	30
1207SR	7	3/8 7/16 1/2 9/16 5/8 11/16 3/4		
1208MR	8	10 11 12 13 14 17 19 22	0.65	24
1210MR	10	8 10 12 13 14 17 19 21 22 24	1.38	16
1211MR	11	8 9 10 11 12 13 14 17 19 22 24	1.4	16
1211SR	11	1/4 5/16 3/8 7/16 1/2 9/16 11/16 3/4 13/16 7/8 15/16		
1211SR01	11	1/4 5/16 3/8 7/16 1/2 9/16 5/8 11/16 3/4 7/8 1		
1212MR	12	8 9 10 11 12 13 14 15 16 17 19 22	1.03	16
1214MR	14	10 11 12 13 14 16 17 19 21 22 24 27 30 32	2.70	8
1214SR	14	5/16 3/8 7/16 1/2 9/16 5/8 11/16 3/4 13/16 7/8 15/16 1 1-1/8 1-1/4		
1214MR01	14	10 11 13 14 16 17 18 19 21 22 24 27 30 32		
1215MR	14	8 9 10 11 12 13 14 15 16 17 19 21 22 24	1.63	12
1215MR01	14	8 10 11 12 13 14 15 16 17 18 19 21 22 24		
1214SR01	14	3/8 7/16 1/2 9/16 5/8 11/16 3/4 13/16 7/8 15/16 1 1-1/16 1-1/8 1-1/4	3.23	8
1216SR	16	1/4 5/16 3/8 7/16 1/2 9/16 5/8 11/16 3/4 13/16 7/8 15/16 1 1-1/16 1-1/8 1-1/4	3.44	8
1218MR01	18	6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 24	2.50	9
1226MR	26	6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 32	5.30	4

1207MR / SR

1208MR

1210MR

1211MR / SR / SR01

1212MR

1214MR / MR01 / SR
1215MR / MR01

1214SR 01

1216SR

1226MR

Open End Wrench & Set

1900
5900



- European slimline type
- 15° open ended angle
- Chrome vanadium steel
- Chrome plated
- Metric size - DIN3110
- Inch size -ANSI/ASME B107.6

KING TONY	Size mm / inch	L (mm)	g	
19005507	5.5 x 7	123	28	12 / 576
19000607	6 x 7	123	28	12 / 576
19000708	7 x 8	140	36	12 / 576
19000809	8 x 9	140	39	12 / 576
19000810	8 x 10	140	38	12 / 576
19000911	9 x 11	156	55	12 / 288
19001011	10 x 11	156	65	12 / 288
19001012	10 x 12	156	65	12 / 288
19001113	11 x 13	172	78	12 / 288
19001213	12 x 13	172	86	12 / 288
19001214	12 x 14	172	78	12 / 288
19001314	13 x 14	172	78	12 / 288
19001317	13 x 17	195	124	12 / 192
19001415	14 x 15	188.5	114	12 / 192
19001417	14 x 17	204	146	12 / 192
19001617	16 x 17	204	146	12 / 192
19001618	16 x 18	221	165	12 / 144
19001719	17 x 19	221	177	12 / 144
19001819	18 x 19	221	178	12 / 144
19001921	19 x 21	237	210	12 / 144
19001922	19 x 22	237	210	12 / 144
19002022	20 x 22	237	210	12 / 144
19002123	21 x 23	247	258	6 / 72
19002224	22 x 24	247	258	6 / 72
19002326	23 x 26	263	281	6 / 72
19002426	24 x 26	263	281	6 / 72
19002427	24 x 27	263	326	6 / 72
19002528	25 x 28	279	373	6 / 48
19002632	26 x 32	298	481	6 / 48
19002730	27 x 30	298	481	6 / 48
19002732	27 x 32	298	481	6 / 48
19003032	30 x 32	298	481	6 / 48
59000810	1/4 x 5/16	123	28	12 / 576
59001012	5/16 x 3/8	140	39	12 / 576
59001214	3/8 x 7/16	156	65	12 / 288
59001416	7/16 x 1/2	172	78	12 / 288
59001618	1/2 x 9/16	172	78	12 / 288
59001820	9/16 x 5/8	188.5	114	12 / 192
59002022	5/8 x 11/16	204	146	12 / 192
59002224	11/16 x 3/4	221	177	12 / 144
59002628	13/16 x 7/8	237	210	12 / 144
59003032	15/16 x 1	247	258	6 / 72
59003034	15/16 x 1-1/16	263	281	6 / 72
59003236	1 x 1-1/8	279	373	6 / 48
59003640	1-1/8 x 1-1/4	298	481	6 / 48

1108MR / SR

1110MR / SR

1112MR / SR

KING TONY	PC. / SET	Contents	kg	
1108MR	8	6 x 7 8 x 9 10 x 11 12 x 13 14 x 15 16 x 17 18 x 19 20 x 22	0.91	24
1108SR	8	1/4 x 5/16 5/16 x 3/8 3/8 x 7/16 7/16 x 1/2 9/16 x 5/8 5/8 x 11/16 11/16 x 3/4 13/16 x 7/8		
1110MR	10	6 x 7 8 x 9 10 x 11 12 x 13 14 x 15 16 x 17 18 x 19 20 x 22 24 x 27 25 x 28	1.67	16
1110SR	10	1/4 x 5/16 5/16 x 3/8 3/8 x 7/16 7/16 x 1/2 9/16 x 5/8 5/8 x 11/16 11/16 x 3/4 13/16 x 7/8 15/16 x 1-1/16 1 x 1-1/8		
1112MR	12	6 x 7 8 x 9 10 x 11 12 x 13 14 x 15 16 x 17 18 x 19 20 x 22 21 x 23 24 x 27 25 x 28 30 x 32	2.35	10
1112SR	12	1/4 x 5/16 5/16 x 3/8 3/8 x 7/16 7/16 x 1/2 9/16 x 5/8 5/8 x 11/16 11/16 x 3/4 13/16 x 7/8 15/16 x 1 15/16 x 1-1/16 1 x 1-1/8 1-1/8 x 1-1/4		

8781007KT applied to 1900-5507 ~1900-1213 , 5900-0810 ~ 5900-1416

8781013KT applied to 1900-1214 ~1900-2224 , 5900-1820 ~ 5900-2628

8781032KT applied to 1900-2326 ~1900-3032 , 5900-3032 ~ 5900-3640

45° Offset Ring Wrench

1960
5960

- 45° deep ring offset
- Thin wall rings
- Chrome vanadium steel
- Chrome plated
- Metric size - DIN 838
- INCH size - ANSI/ASME B107.6

KING TONY	Size mm / inch	L (mm)	g	
19600607	6 x 7	165	45	12 / 360
19600809	8 x 9	175	53	12 / 360
19600810	8 x 10	185	53	12 / 360
19601012	10 x 12	185	60	12 / 360
19601113	11 x 13	205	62	12 / 240
19601214	12 x 14	220	100	12 / 240
19601417	14 x 17	235	151	12 / 144
19601719	17 x 19	250	221	6 / 72
19601921	19 x 21	270	340	6 / 72
19602224	22 x 24	320	479	6 / 48
19602326	23 x 26	360	465	6 / 48
19602427	24 x 27	360	479	6 / 48
19602732	27 x 32	380	580	6 / 36
19603032	30 x 32	380	650	6 / 36
59601214	3/8 x 7/16	185	53	12 / 360
59601618	1/2 x 9/16	220	100	12 / 240
59602022	5/8 x 11/16	240	151	12 / 144
59602428	3/4 x 7/8	270	340	6 / 72
59603032	15/16 x 1	360	465	6 / 48

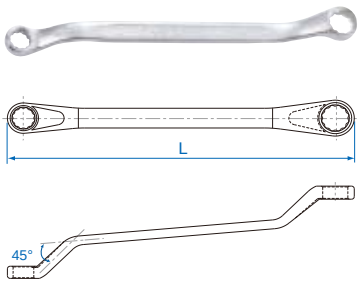

45° Offset Ring Wrench Set

1606 MR
1609 MR

KING TONY	PC./SET	Contents	kg	
1606MR	6	10 x 12 12 x 14 14 x 17 17 x 19 19 x 21 23 x 26	1.6	16
1609MR	9	8 x 9 10 x 12 11 x 13 12 x 14 14 x 17 17 x 19 19 x 21 22 x 24 23 x 26	1.93	8

1609MR

75° Offset Ring Wrench

1970
5970

- European slimline type
- 75° deep ring offset
- Thin wall rings
- Chrome vanadium steel
- Chrome plated
- Metric size - DIN 838
- INCH size - ANSI/ASME B107.6

KING TONY	Size mm / inch	L (mm)	g	
19700607	6 x 7	168	43	12 / 360
19700809	8 x 9	183	62	12 / 360
19700810	8 x 10	183	62	12 / 360
19701011	10 x 11	198	88	12 / 240
19701012	10 x 12	198	88	12 / 240
19701113	11 x 13	217	131	12 / 144
19701213	12 x 13	217	131	12 / 144
19701214	12 x 14	217	131	12 / 144
19701314	13 x 14	217	131	12 / 144
19701415	14 x 15	239	152	12 / 144
19701417	14 x 17	260	189	6 / 96
19701617	16 x 17	260	189	6 / 96
19701719	17 x 19	292	240	6 / 96
19701819	18 x 19	292	240	6 / 96
19701921	19 x 21	318	330	6 / 60
19702022	20 x 22	318	330	6 / 60
19702123	21 x 23	326.5	362	6 / 60
19702224	22 x 24	326	362	6 / 60
19702326	23 x 26	344	436	6 / 48
19702426	24 x 26	329	436	6 / 48
19702427	24 x 27	329	436	6 / 48
19702528	25 x 28	347	488	6 / 48
19703032	30 x 32	362	600	6 / 36
59700810	1/4 x 5/16	168	43	12 / 360
59701012	5/16 x 3/8	183	62	12 / 360
59701214	3/8 x 7/16	198	88	12 / 240
59701416	7/16 x 1/2	217	131	12 / 144
59701618	1/2 x 9/16	217	134	12 / 144
59701820	9/16 x 5/8	260	152	12 / 96
59702022	5/8 x 11/16	260	189	6 / 96
59702224	11/16 x 3/4	292	240	6 / 96
59702428	3/4 x 7/8	318	330	6 / 60
59702628	13/16 x 7/8	326.5	330	6 / 60
59703032	15/16 x 1	329	436	6 / 48
59703436	1-1/16 x 1-1/8	347	488	6 / 48
59703640	1-1/8 x 1-1/4	365	679	6 / 48

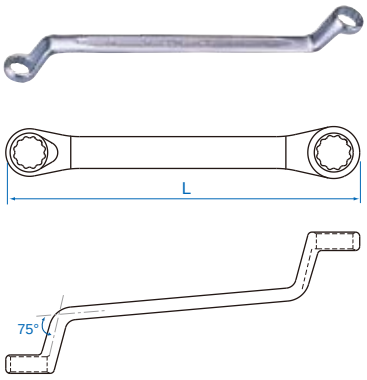

75° Offset Ring Wrench Set

KING TONY	PC. / SET	Contents	kg	
1706MR	6	6 x 7 8 x 9 10 x 11 12 x 13 14 x 15 16 x 17	0.80	24
1707SR	7	1/4 x 5/16 3/8 x 7/16 1/2 x 9/16 5/8 x 11/16 3/4 x 7/8 15/16 x 1 1-1/16 x 1-1/8	2.00	12
1708MR	8	6 x 7 8 x 9 10 x 11 12 x 13 14 x 15 16 x 17 18 x 19 21 x 23	1.43	12
1710MR	10	6 x 7 8 x 9 10 x 11 12 x 13 14 x 15 16 x 17 18 x 19 21 x 23 24 x 27 30 x 32	2.60	8
1712MR	12	6 x 7 8 x 9 10 x 11 12 x 13 14 x 15 16 x 17 18 x 19 20 x 22 21 x 23 24 x 26 25 x 28 30 x 32	3.32	6

1706MR

1707SR

1708MR

1710MR

1712MR

Straight Ring Wrench

19C0 NEW

- Thin wall rings
- Chrome vanadium steel
- Chrome plated
- Metric size - DIN 838

KING TONY	Size mm / inch	L (mm)	g	
19C00607	6 x 7	121	17	20 / 480
19C00809	8 x 9	137	27	20 / 480
19C01011	10 x 11	154	51	20 / 320
19C01213	12 x 13	164	70	20 / 240
19C01415	14 x 15	182	92	20 / 240
19C01617	16 x 17	211	118	12 / 144
19C01819	18 x 19	226	151	12 / 144
19C02022	20 x 22	240	187	10 / 120
19C02123	21 x 23	255	242	10 / 120
19C02426	24 x 26	270	290	6 / 72
19C02528	25 x 28	285	339	6 / 72
19C03032	30 x 32	335	520	5 / 40

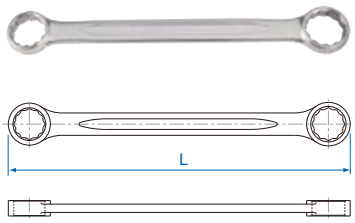

Suitable for narrow space



Straight Ring Wrench Set

1C08MR & 1C12MR NEW

KING TONY	PC/SET	Contents	kg	
1C08MR	8	6 x 7 8 x 9 10 x 11 12 x 13 14 x 15 16 x 17 18 x 19 20 x 22	0.79	1 / 24
1C12MR	12	6 x 7 8 x 9 10 x 11 12 x 13 14 x 15 16 x 17 18 x 19 20 x 22 21 x 23 24 x 26 25 x 28 30 x 32	2.23	1 / 12

1C08MR

1C12MR

Half Moon Ring Wrench

1950

- Chrome vanadium steel
- Chrome plated
- Metric sizes
- Specially designed for starter bolts
- Used mainly in automotive applications for starter motors, inlet and exhaust manifolds

KING TONY	Size mm	L (mm)	g	/
19500810	8 x 10	137	40	12 / 288
19501012	10 x 12	141	55	12 / 288
19501113	11 x 13	166	93	8 / 128
19501214	12 x 14	166	94	8 / 128
19501315	13 x 15	190	126	6 / 72
19501417	14 x 17	190	126	6 / 72
19501618	16 x 18	220	156	5 / 60
19501719	17 x 19	220	174	5 / 60
19501922	19 x 22	256	255	5 / 40

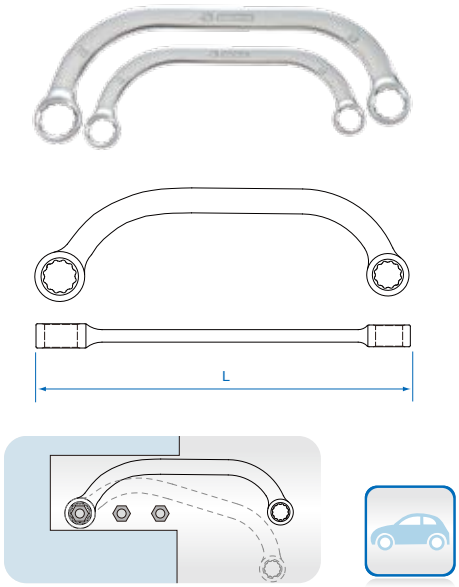

Star Box End Wrench

1920

- Chrome vanadium steel
- Chrome plated
- Metric size
- Inch size -ANSI/ASME B107.6

KING TONY	Size	L (mm)	g	/
19200608	E6 x E8	114.0	18.8	12 / 504
19200711	E7 x E11	126.5	27.4	12 / 504
19201012	E10 x E12	142.5	32.6	12 / 384
19201418	E14 x E18	183.0	86.2	12 / 240
19201622	E16 x E22	205.0	119.0	12 / 192
19202024	E20 x E24	225.0	172.2	12 / 144

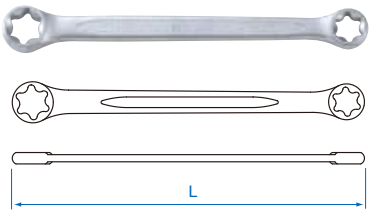

Flare Nut Wrench

1930
5930

- **6** points
- 12° ring offset
- Chrome vanadium steel
- Chrome plated
- DIN 3118

KING TONY	Size mm / inch	L (mm)	g	/
19300810	8 x 10	130	53	12 / 216
19300911	9 x 11	130	55	12 / 216
19301011	10 x 11	150	78	12 / 192
19301012	10 x 12	150	74	12 / 192
19301113	11 x 13	170	106	12 / 144
19301213	12 x 13	170	104	12 / 144
19301214	12 x 14	170	102	12 / 144
19301417	14 x 17	190	132	12 / 144
19301719	17 x 19	210	170	8 / 128
19301922	19 x 22	230	218	9 / 108
59301012	5/16 x 3/8	130	53	12 / 216
59301214	3/8 x 7/16	150	78	12 / 192
59301618	1/2 x 9/16	170	102	12 / 144
59301820	9/16 x 5/8	190	132	12 / 144
59302224	11/16 x 3/4	210	170	6 / 96
59302428	3/4 x 7/8	230	218	6 / 72

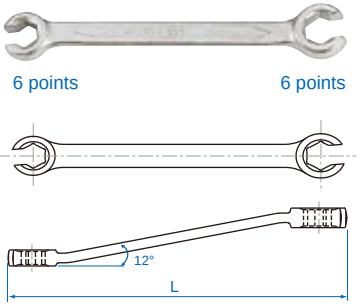

Flare Nut Wrench

1931

- **12** points
- 12° ring offset
- Chrome vanadium steel
- Chrome plated
- DIN 3118

KING TONY	Size mm	L (mm)	g	
19312224	22 x 24	250	310	6 / 72
19312427	24 x 27	270	359	6 / 48
19313032	30 x 32	290	471	5 / 40

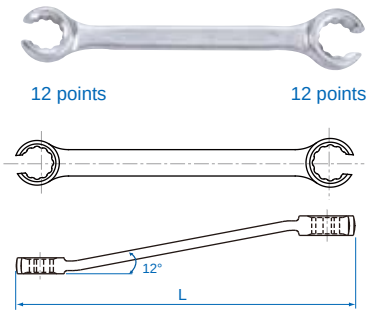

Flare Nut Wrench Set

1306 MR SR

	PC./SET	Contents	g	
1306MR	6	8 x 10 10 x 12 11 x 13 12 x 14 17 x 19 19 x 22	0.90	30
1306SR	6	5/16 x 3/8 3/8 x 7/16 1/2 x 9/16 9/16 x 5/8 11/16 x 3/4 3/4 x 7/8	0.86	30

Combination Swivel Head Socket Wrench

1020

- Slim pattern, with free moving socket wrench
- Sockets can rotate up to 180°
- Metric sizes
- Chrome vanadium steel
- Chrome plated

KING TONY	Size mm	L (mm)	g	
1020-08	8	170	65	10 / 180
1020-09	9	170	65	10 / 180
1020-10	10	180	75	10 / 160
1020-11	11	188	105	10 / 160
1020-12	12	190	114	10 / 120
1020-13	13	206	140	10 / 120
1020-14	14	225	186	10 / 120
1020-15	15	225	195	6 / 72
1020-16	16	234	234	6 / 72
1020-17	17	234	234	4 / 48
1020-18	18	252	307	4 / 48
1020-19	19	250	307	4 / 48

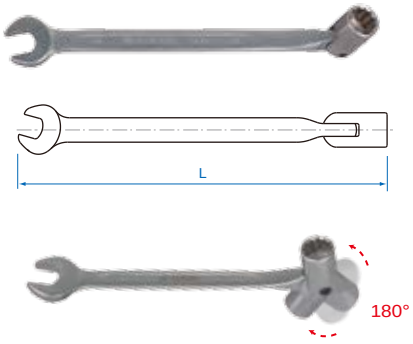

Combination Swivel Head Socket Wrench Set

1B06 MR

	PC./SET	Contents	kg	
1B06MR	6	1020 10 12 13 14 17 19	1.056	1 / 24

Double Swivel End Socket Wrench

1910

- Thin walled heads
- Swivel through a wide radius
- Sockets can rotate up to 180°
- Metric sizes
- Chrome Vanadium Steel
- Chrome plated

KING TONY	Size mm	L (mm)	g	
19100607	6 x 7	182	72	12 / 216
19100809	8 x 9	182	78	12 / 216
NEW 19100810	8 x 10	185	85	10 / 160
19101011	10 x 11	200	115	10 / 160
NEW 19101012	10 x 12	205	119	10 / 120
19101213	12 x 13	220	155	10 / 120
NEW 19101214	12 x 14	225	175	10 / 80
19101415	14 x 15	240	235	10 / 120
19101617	16 x 17	259	330	10 / 80
19101819	18 x 19	275	410	6 / 54
19102022	20 x 22	305	595	4 / 36
19102123	21 x 23	305	640	4 / 32
19102427	24 x 27	335	775	4 / 32

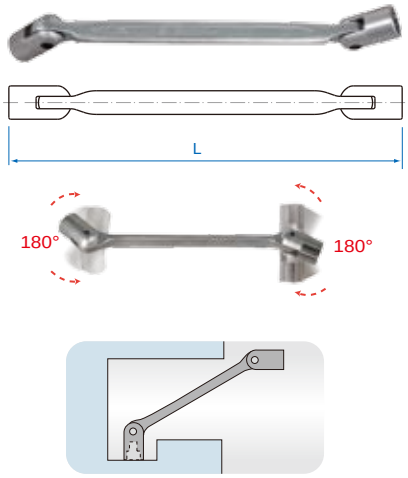

Double Swivel End Socket Wrench Set

1A06 MR

	Contents	kg	
1A06MR	1910 — 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19	1.32	1 / 16

Slogging Wrench

10A0

- Open - ended slogging wrench
- Finished with phosphate sunk
- DIN 133

KING TONY	Size mm	L (mm)	g	
10A0-24	24	178	302	6 / 72
10A0-27	27	180	320	6 / 72
10A0-30	30	190	400	6 / 60
10A0-32	32	190	418	6 / 60
10A0-36	36	215	600	6 / 24
10A0-41	41	233	902	5 / 20
10A0-46	46	255	1122	4 / 16
10A0-50	50	275	1555	2 / 16
10A0-55	55	298	2015	2 / 12
10A0-60	60	320	2515	1 / 10
10A0-65	65	340	3260	1 / 8
10A0-70	70	370	4390	1 / 5
10A0-75	75	372	4140	1 / 5
NEW 10A0-80	80	392	6820	1 / 4
NEW 10A0-85	85	939	6300	1 / 4
NEW 10A0-90	90	439	9270	1 / 2
NEW 10A0-95	95	446	8700	1 / 2
NEW 10A0-A0	100	480	10500	1 / 2
NEW 10A0-A5	105	487	10300	1 / 2
NEW 10A0-B0	110	506	17000	1 / 1
NEW 10A0-B5	115	506	17500	1 / 1
NEW 10A0-C0	120	515	23400	1 / 1

Slogging Wrench

10B0

- Ring slogging wrench
- Finished with phosphate
- sunk
- DIN 7444

KING TONY	Size mm	L (mm)	g	
10B0-24	24	162	239	6 / 72
10B0-27	27	180	247	6 / 72
10B0-30	30	190	354	6 / 72
10B0-32	32	190	404	6 / 60
10B0-36	36	205	499	6 / 36
10B0-41	41	230	658	6 / 24
10B0-46	46	240	886	4 / 16
10B0-50	50	253	1096	4 / 16
10B0-55	55	265	1357	2 / 16
10B0-60	60	280	1654	2 / 12
10B0-65	65	298	1865	2 / 12
10B0-70	70	330	2868	1 / 8
10B0-75	75	330	2984	1 / 8
NEW 10B0-80	80	350	3930	1 / 6
NEW 10B0-85	85	347	3800	1 / 6
NEW 10B0-90	90	392	5340	1 / 4
NEW 10B0-95	95	392	5060	1 / 4
NEW 10B0-A0	100	422	6400	1 / 4
NEW 10B0-A5	105	422	5800	1 / 3
NEW 10B0-B0	110	450	7450	1 / 3
NEW 10B0-B5	115	450	6725	1 / 3
NEW 10B0-C0	120	460	8900	1 / 2

Heavy Duty Offset Ring Wrench

10C0 NEW

- Chrome-plated
- To be used with extension tubes item “11”
- Chrome Vanadium Steel

KING TONY	Size mm	L (mm)	g	
10C0-24	24	179.2	450	6 / 48
10C0-27	27	186.4	500	6 / 48
10C0-30	30	194.9	580	4 / 36
10C0-32	32	229.7	810	4 / 24
10C0-36	36	240.6	870	4 / 24
10C0-41	41	259.4	1100	2 / 16
10C0-46	46	275.3	1400	2 / 16
10C0-50	50	285.1	1600	2 / 16
10C0-55	55	296.4	1800	1 / 12
10C0-60	60	341.4	2800	1 / 9
10C0-65	65	351.2	3200	1 / 4

11 NEW

- Tubes for item 10C0
- Chrome plated

G TONY	Size ø mm	L (mm)	Applied to socket sizes	g	
111946	26 x 19	460	10C0-24 (24mm), 10C0-27 (27mm), 10C0-30 (30mm)	1050	20
112261	28 x 22	610	10C0-32 (32mm), 10C0-36 (36mm), 10C0-41 (41mm)	1450	16
112576	32 x 25	760	10C0-46 (46mm), 10C0-50 (50mm), 10C0-55 (55mm)	2400	6
113086	36 x 30	860	10C0-60 (60mm), 10C0-65 (65mm)	2610	4

Double-Ended Socket Wrench

19A0

NEW

- Chrome vanadium steel
- Chrome plated

KING TONY	mm	D1 (mm)	D2 (mm)	P1 (mm)	P2 (mm)	L (mm)	g	
19A00607	6x7	10	11	7	7	105	44	30 / 180
19A00809	8x9	13	14	8	8	110	60	30 / 180
19A01011	10x11	15	16	9	9	120	79	24 / 144
19A01213	12x13	18	19	11	11	140	142	18 / 144
19A01415	14x15	20	22	13	13	145	138	12 / 96
19A01617	16x17	23	24	14	14	155	190	10 / 90
19A01819	18x19	25	26	17	17	165	243	8 / 72
19A02022	20x22	28	30	18	18	170	288	8 / 72
19A02123	21x23	29	31	18	18	185	318	6 / 54
19A02426	24x26	33	35	20	20	190	396	4 / 36
19A02528	25x28	34	37	22	22	205	511	4 / 24
19A02729	27x29	37	39	23	23	210	595	2 / 12
19A03032	30x32	40	42	27	27	210	671	2 / 12





Double-ended socket wrench for the hollow tube design, a long-type screw may be used.

Bar For Double-ended Socket Wrench

- Chrome vanadium alloy steel
- Chrome plated

KING TONY	L (mm)	ø (mm)	ø1 (mm)	ø2 (mm)	ø3 (mm)	ø4 (mm)
19A0-09	220	12.7	11.75	9.75		
19A0-15	300	7.8	6.75	4.75	5.75	2.8

Speed Wrench

Speed Wrench

Metric size from 8 ~ 24 mm

3731

3732

Flexible Speed Wrench

Metric size from 8 ~ 19 mm

3730

Open-Side Speed Wrench NEW

Metric size from 8 ~ 19 mm

3721

Double - Ended Speed Wrench

Metric size from 8 ~ 19 mm

3737

Metric size from 6 to 24 mm

3736

KING TONY		Apply to speed wrench	Function
373202H		10 mm	1/4” Bit
373202R		10 mm	1/4” drive
373203R		13 mm	3/8” drive
373225H		13 mm	5/16” Bit
373204R		19 mm	1/2” drive

Flexible Speed Wrench

3730

- Flexible head, open - ended and ratchet ring - wrench
- Metric sizes from 8 to 19 mm
- Polished with chrome finish
- 5° gear action (72 teeth)

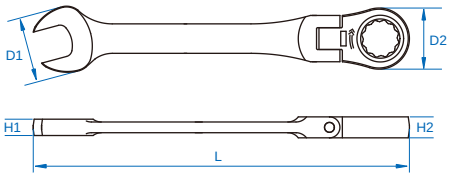

KING TONY	Size mm	D1	D2	H1	H2	L (mm)	g	
373008M	8	16.2	16.7	4.3	6.5	127.0	40	12 / 384
373009M	9	18.2	18.6	4.6	6.9	131.5	40	12 / 384
373010M	10	20.3	20.0	5.0	7.3	136.0	60	12 / 384
373011M	11	22.5	21.8	5.4	7.7	141.0	60	10 / 320
373012M	12	24.3	23.0	5.8	8.2	147.5	80	10 / 320
373013M	13	26.8	25.2	6.1	8.6	154.0	100	6 / 192
373014M	14	28.7	26.8	6.4	9.0	160.0	100	10 / 200
373015M	15	30.5	28.3	6.9	9.4	169.0	120	10 / 160
373016M	16	32.9	29.8	7.2	9.9	179.0	160	10 / 160
373017M	17	34.5	31.8	7.6	10.3	190.0	180	10 / 160
373018M	18	37.0	32.8	8.0	10.7	203.0	200	10 / 160
373019M	19	39.2	33.9	8.6	11.2	215.0	220	12 / 144

Speed Wrench

3731

- Open - ended and ratchet ring -wrench
- Metric sizes from 8 to 24 mm
- Polished with chrome finish
- 5° gear action (72 teeth)

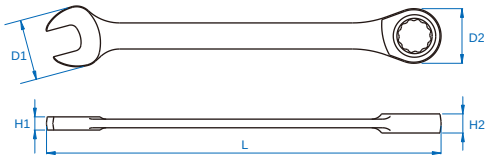

KING TONY	Size mm	D1	D2	H1	H2	L (mm)	g	
373108M	8	16.7	17.0	4.0	6.5	140.0	25	12 / 384
373109M	9	18.7	18.6	4.4	6.9	149.0	35	12 / 384
373110M	10	20.8	20.2	4.8	7.3	158.0	40	12 / 240
373111M	11	23.0	22.0	5.2	7.7	165.0	60	12 / 240
373112M	12	24.6	23.4	5.5	8.2	171.0	75	12 / 240
373113M	13	26.8	25.5	5.8	8.6	178.0	80	10 / 160
373114M	14	29.0	26.9	6.2	9.0	190.0	100	10 / 160
373115M	15	31.0	28.3	6.5	9.4	199.0	115	10 / 160
373116M	16	33.0	29.8	6.8	9.9	208.0	135	10 / 160
373117M	17	35.5	31.8	7.2	10.3	225.0	165	6 / 60
373118M	18	37.5	32.7	7.7	10.7	236.0	195	6 / 60
373119M	19	39.4	34.0	8.2	11.2	247.0	225	6 / 60
373121M	21	45.8	40.1	9.0	13.0	287.8	320	6 / 54
373122M	22	45.8	40.1	9.0	13.0	287.8	340	6 / 54
373124M	24	51.8	46.5	10.0	14.5	321.0	475	6 / 54

Speed Wrench

3732

- Combined with 5° open - ended and ratchet ring - wrench
- Metric sizes from 8 to 24 mm
- Polished with chrome finish
- 5° gear action (72 teeth)
- 2 ways locking design
- Take - up: 13°

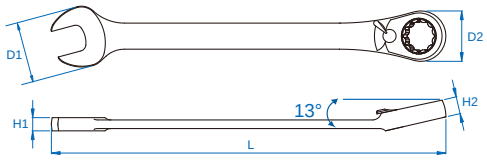

KING TONY	Size mm	D1	D2	H1	H2	L (mm)	g	
373208M	8	16.7	16.6	4.6	6.5	140	20	12 / 384
373209M	9	18.8	18.4	4.9	6.9	150	25	12 / 384
373210M	10	20.8	20.0	5.3	7.3	159	40	12 / 240
373211M	11	23.0	21.8	5.6	7.7	165	60	12 / 240
373212M	12	25.0	22.7	6.0	8.2	172	75	12 / 240
373213M	13	27.1	24.7	6.4	8.6	178	95	10 / 160
373214M	14	29.2	27.0	6.8	9.0	191	110	10 / 160
373215M	15	31.3	28.3	7.0	9.4	200	120	10 / 160
373216M	16	33.4	30.0	7.2	9.9	208	160	10 / 60
373217M	17	35.5	31.8	7.7	10.3	226	175	6 / 60
373218M	18	37.6	32.6	8.2	10.7	237	205	6 / 60
373219M	19	39.7	33.8	8.8	11.2	248	220	6 / 60
373221M	21	46.0	40.0	9.0	13.0	290	320	6 / 54
373222M	22	46.0	40.0	9.0	13.0	290	320	6 / 54
373224M	24	52.2	46.0	10.0	14.5	323	465	6 / 54

3736

- Double - ended wrench
- Metric sizes from 8 to 19 mm
- Polished with chrome finish
- 5° gear action (72 teeth)

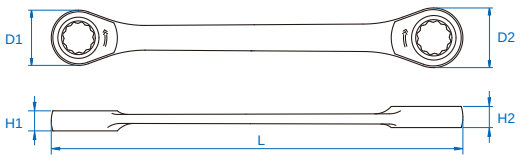

KING TONY	Size mm	D1	D2	H1	H2	L (mm)	g	
37360809M	8x9	16.8	20.2	6.5	6.9	128	45	10 / 320
37361011M	10x11	20.2	21.8	7.3	7.7	150	65	10 / 200
37361213M	12x13	23.0	24.8	8.2	8.6	170	100	10 / 200
37361415M	14x15	26.5	29.5	9.0	9.4	190	120	10 / 160
37361618M	16x18	29.5	33.5	9.9	10.7	210	190	10 / 120
37361719M	17x19	31.5	33.5	10.3	11.2	230	210	10 / 120

3737

- Double - ended speed wrench
- Metric sizes from 6 to 24 mm
- Polished with chrome finish
- 5° gear action (72 teeth)
- 2 ways locking design
- Take - up: 13°

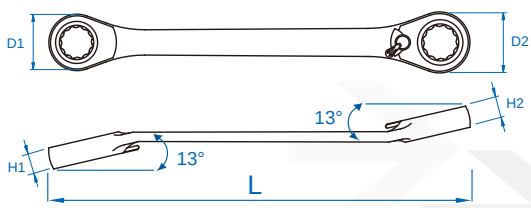

KING TONY	Size mm	D1	D2	H1	H2	L (mm)	g	
37370607M	6x7	14.2	17.2	6.3	6.5	115	36	10 / 320
37370809M	8x9	16.8	20.2	6.5	6.9	128	45	10 / 320
37371011M	10x11	20.2	21.8	7.3	7.7	150	61	10 / 200
37371213M	12x13	23.0	24.8	8.2	8.6	170	90	10 / 200
37371415M	14x15	26.5	29.5	9.0	9.4	190	130	10 / 160
37371618M	16x18	29.5	33.5	9.9	10.7	210	183	10 / 120
37371719M	17x19	31.5	33.5	10.3	11.2	230	209	10 / 120
37372123M	21x23	40.0	46.0	13	14.5	260	408	8 / 64
37372224M	22x24	40.0	46.0	13	14.5	260	397	8 / 64

Open-side Speed Wrench

3721 NEW

- Open-side speed wrench
- Torque rating exceeds ANSI specifications by 30% plus
- Made of the highest quality Chrome Vanadium Steel

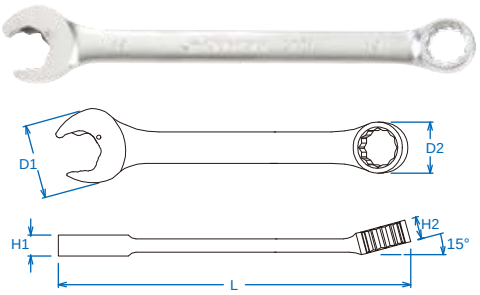



KING TONY	Size mm / inch	D1	D2	H1	H2	L (mm)	g	
372108M	8	17.8	13.3	5.0	6.0	136.0	38	12 / 384
372110M	10	22.2	16.6	6.0	7.2	161.0	60	12 / 240
372111M	11	25.4	17.5	6.6	7.4	168.0	68	12 / 288
372112M	12	26.3	19.2	7.5	7.9	174.0	83	12 / 288
372113M	13	28.2	20.3	7.9	8.6	180.0	100	10 / 240
372114M	14	31.5	21.3	8.5	9.2	193.0	123	10 / 120
372115M	15	32.8	23.6	8.5	9.7	200.0	143	10 / 120
372116M	16	34.9	23.6	9.0	10.8	207.0	171	10 / 120
372117M	17	37.4	28.1	9.5	10.9	227.0	191	10 / 100
372118M	18	39.0	28.0	9.8	11.2	239.0	220	10 / 100
372119M	19	41.2	29.3	9.8	12.2	250.0	250	10 / 100
372110S	5/16	17.8	13.3	5.0	6.0	136.0	38	12 / 384
372112S	3/8	22.2	16.6	6.0	7.2	161.0	59	12 / 288
372114S	7/16	25.4	17.5	6.6	7.4	168.0	68	12 / 288
372116S	1/2	28.2	20.3	7.9	8.6	180.0	97	10 / 240
372118S	9/16	31.5	21.3	8.5	9.2	193.0	120	10 / 120
372120S	5/8	34.9	25.6	9.0	10.8	207.0	163	10 / 120
372122S	11/16	37.4	28.1	9.5	10.9	227.0	184	10 / 100
372124S	3/4	41.2	29.3	9.8	12.2	250.0	246	6 / 60

Speed Wrench Set

12107 MR
12207 MR

- 7 PC. speed wrench set

	Contents	
12107MR	3731	10 11 12 14 15 17 19
12207MR	3732	

12107MR 12207MR

	kg	
12107MR 12207MR	0.91	24

12112 MR
12212 MR

- 12 PC. speed wrench set

	Contents	
12112MR	3731	8 9 10 11 12 13 14 15 17 19 22 24
12212MR	3732	

12112MR 12212MR

	kg	
12112MR 12212MR	1.95	8

Speed Wrench Set

12114 MR
12214 MR

- 14 PC. speed wrench set

	Contents	
12114MR	3731	8 9 10 11 12 13 14 15 16 17 18 19 22 24
12214MR	3732	

12114MR

12214MR

	kg	
12114MR 12214MR	2.50	12

14111 MR NEW
14108 SR NEW

- Open-side speed wrench set

		PC./SET	Contents
14111MR	3721	11	8 10 11 12 13 14 15 16 17 18 19
14108SR		8	5/16 3/8 7/16 1/2 9/16 5/8 11/16 3/4

14111MR

14108SR

	kg	
14111MR	1.590	1 / 12
14108SR	1.108	1 / 16

12709 MR

- 9 PC. speed wrench set

	Contents
12709MR	3737 — 6x7 8x9 10x11 12x13 14x15 16x18 17x19 21x23 22x24

12709MR

	kg	
12709MR	1.50	1 / 16

12706 MR

- 6 PC. speed wrench set

	Contents
12706MR	3737 — 8x9 10x11 12x13 14x15 16x18 17x19

12706MR

	kg	
12706MR	0.72	1 / 16

13012 MR

- 12 PC. flexible speed wrench set

	Contents	kg	
13012MR	3730 — 8 9 10 11 12 13 14 15 16 17 18 19	2.167	6

Speed Wrench Set

13013 MR

- 13 PC. flexible speed wrench set

	Contents	kg	
13013MR	3730: 8 10 12 13 14 16 17 18 19 373202H 373202R 373203R 373204R	1.66	8

13113 MR
13213 MR

- 13 PC. speed wrench set

	Contents				
13113MR	3731	8 10 12 13 14 16 17 18 19	373202H	373202R	373203R	373204R
13213MR	3732					

13113MR

13213MR

	kg	
13113MR 13213MR	1.64	8

91162 MR
91262 MR

- 62 PC. speed wrench set

	Contents						
91162MR	3731: 8 10 12 13 14 16 17 18 19	2375M: E4 E5 E6 E7 E8	3375M: E10 E11 E12	4375M: E10 E12 E14 E16 E18 E20	1636H: H4 H5 H6 H7 H8 H10 H12	1636M: 5 6 8 10 12	1636T 1636U: T10 T15 T20 T25 T27 T30 T40 T45 T50 T55 T60	314810M 414810M 373202R 373203R 373204R
91262MR	3732: 8 10 12 13 14 16 17 18 19							

91162MR

91262MR

	kg	
91162MR 91262MR	12.3	4

91168 MR
91268 MR

- 68 PC. speed wrench set

	Contents						
91168MR	3731: 8 9 10 11 12 13 14 15 16 17 18 19 21 22 24	2375M: E4 E5 E6 E7 E8	3375M: E10 E11 E12	4375M: E10 E12 E14 E16 E18 E20	1636H: H4 H5 H6 H7 H8 H10 H12	1636M: 5 6 8 10 12	1636T 1636U: T10 T15 T20 T25 T27 T30 T40 T45 T50 T55 T60	314810M 414810M 373202R 373203R 373204R
91268MR	3732: 8 9 10 11 12 13 14 15 16 17 18 19 21 22 24							

91168MR

91268MR

	kg	
91168MR 91268MR	12.3	4

Angled Socket Wrench

1080

- Angle and through-hole design
- High quality steel, chrome plated
- Deep recess at one side and open end socket at the other, easily fit over protruding studs
- ISO 2236

KING TONY	mm	B (mm)	P (mm)	H (mm)	C (mm)	L (mm)	g	
1080-06	6	10.0	7.0	15	29	105	55	12 / 240
1080-07	7	11.5	8.0	15	30	110	60	12 / 240
1080-08	8	12.5	10.0	20	32	120	62	12 / 216
1080-09	9	14.0	10.0	20	33	125	65	12 / 216
1080-10	10	15.0	11.0	20	35	130	100	6 / 60
1080-11	11	16.5	12.0	20	37	135	115	6 / 60
1080-12	12	17.5	12.0	25	40	140	155	6 / 60
1080-13	13	19.0	14.0	25	47	150	180	6 / 60
1080-14	14	20.0	14.0	30	48	160	185	6 / 60
1080-15	15	21.5	15.0	35	50	170	210	6 / 60
1080-16	16	22.5	17.0	35	54	185	285	6 / 60
1080-17	17	24.0	18.0	35	56	195	315	6 / 60
1080-18	18	25.0	19.5	40	58	210	370	4 / 40
1080-19	19	26.5	20.5	40	62	215	425	4 / 40
1080-20	20	27.5	21.5	45	63	220	445	2 / 20
1080-21	21	29.0	23.5	45	65	230	495	2 / 20
1080-22	22	30.0	23.5	45	67	245	530	2 / 16
1080-23	23	31.5	24.5	45	74	255	610	2 / 16
1080-24	24	32.5	24.5	45	77	265	670	2 / 16
1080-25	25	34.0	24.5	50	79	275	780	2 / 16
1080-26	26	35.0	25.5	50	80	285	805	2 / 16
1080-27	27	36.5	27.5	55	84	295	975	2 / 16
1080-28	28	37.5	27.5	55	86	315	1005	2 / 16
1080-29	29	39.0	28.5	65	90	320	1060	2 / 16
1080-30	30	40.0	28.5	65	93	330	1290	2 / 12
1080-32	32	42.5	28.5	65	95	355	1410	2 / 12

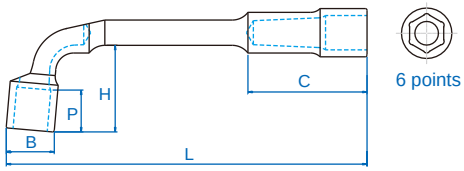

6 points

12 points

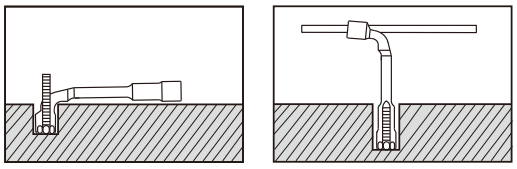

Angled Socket Wrench Set

1805 MR 1808 MR 1812 MR 1826 MR

	Contents	Pack	PC./SET	kg	
1805MR	10 11 13 14 17	Color box	5	1.12	22
1808MR	8 10 11 12 13 14 17 19	Pouch	8	1.73	18
1812MR	8 10 11 12 13 14 16 17 18 19 22 24	Pouch	12	4.75	4
1826MR	6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 32	Color box	26	15.00	2

1805MR

1826MR

1808MR

1812MR

Angled Socket Wrench

1081

- Angle and through-hole design
- High quality steel, chrome plated
- Deep recess at one side and open end socket at the other, easily fit over protruding studs
- ISO 2236

KING TONY	mm	B (mm)	P (mm)	H (mm)	C (mm)	L (mm)	g	
1081-06	6	10.0	7.0	15	29	105	55	12 / 240
1081-07	7	11.5	8.0	15	30	110	60	12 / 240
1081-08	8	12.5	10.0	20	32	120	62	12 / 216
1081-09	9	14.0	10.0	20	33	125	65	12 / 216
1081-10	10	15.0	11.0	20	35	130	100	6 / 60
1081-11	11	16.5	12.0	20	37	135	115	6 / 60
1081-12	12	17.5	12.0	25	40	140	155	6 / 60
1081-13	13	19.0	14.0	25	47	150	180	6 / 60
1081-14	14	20.0	14.0	30	48	160	185	6 / 60
1081-15	15	21.5	15.0	35	50	170	210	6 / 60
1081-16	16	22.5	17.0	35	54	185	285	6 / 60
1081-17	17	24.0	18.0	35	56	195	315	6 / 60
1081-18	18	25.0	19.5	40	58	210	370	4 / 40
1081-19	19	26.5	20.5	40	62	215	425	4 / 40
1081-20	20	27.5	21.5	45	63	220	445	2 / 20
1081-21	21	29.0	23.5	45	65	230	495	2 / 20
1081-22	22	30.0	23.5	45	67	245	530	2 / 16
1081-23	23	31.5	24.5	45	74	255	610	2 / 16
1081-24	24	32.5	24.5	45	77	265	670	2 / 16
1081-25	25	34.0	24.5	50	79	275	780	2 / 16
1081-26	26	35.0	25.5	50	80	285	805	2 / 16
1081-27	27	36.5	27.5	55	84	295	975	2 / 16
1081-28	28	37.5	27.5	55	86	315	1005	2 / 16
1081-29	29	39.0	28.5	65	90	320	1060	2 / 16
1081-30	30	40.0	28.5	65	93	330	1290	2 / 12
1081-32	32	42.5	28.5	65	95	355	1410	2 / 12

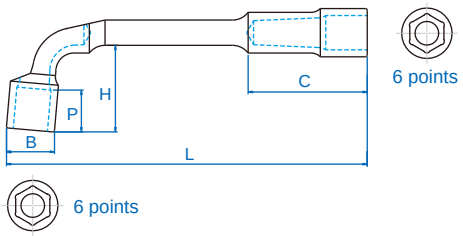

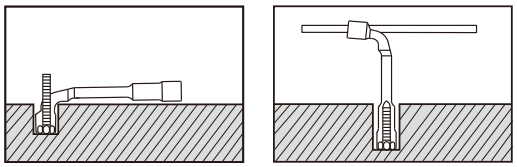

Angled Socket Wrench Set

1912 MR 1926 MR

	Contents	Pack	PC./SET	kg	
1912MR	8 10 11 12 13 14 16 17 18 19 22 24	Pouch	12	4.75	4
1926MR	6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 32	Color box	26	15.00	2

1912MR

1926MR

Angled Socket Wrench

1084 NEW

- High quality steel, chrome plated

KING TONY	mm	D1 (mm)	D2 (mm)	H1 (mm)	L1 (mm)	L (mm)	g	
1084-08	8	12.5	14.0	10	88	230	160	12 / 48
1084-09	9	14.0	15.5	10	88	230	164	12 / 48
1084-10	10	15.0	16.5	10	88	230	202	10 / 40
1084-11	11	16.0	17.5	11	88	230	200	10 / 40
1084-12	12	17.4	19.5	12	98	245	303	6 / 30
1084-13	13	18.9	21.0	12	98	245	320	6 / 30
1084-14	14	19.8	22.0	12	98	260	336	6 / 24
1084-15	15	21.7	24.0	13	98	260	353	6 / 24
1084-16	16	22.2	24.5	13	98	260	356	6 / 24
1084-17	17	24.5	27.0	14	98	260	480	6 / 24
1084-18	18	25.5	28.0	15	98	260	499	6 / 24
1084-19	19	27.1	30.0	15	98	260	590	6 / 24

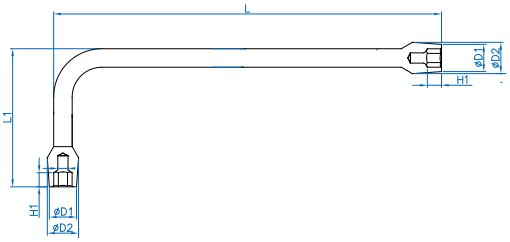

Adjustable Wrench

3611

- Chrome vanadium steel
- Polish, phosphate & chrome plated
- Japanesque type
- Metric size-DIN 3117
- Inch size-ANSI / ASME B107.8

KING TONY	mm	Overall Length (mm)	g	
3611-06	20	150	125	12 / 108
3611-08	25	200	226	12 / 48
3611-10	30	250	430	10 / 60
3611-12	35	300	680	5 / 40
3611-15	45	375	1200	5 / 20
3611-18	55	450	1900	1 / 6
3611-24	65	600	3440	1 / 6

3611P

3611R

3631-10R

- Chrome vanadium steel
- Chrome plated
- Magic button to switch ratchet function on/off
- Metric size-DIN 3117

KING TONY	mm	Overall Length (mm)	g	
3631-10R	32	250	597	6 / 36

3631-10R (TPR + PP)

- Ratchet function
- Can be used in limited space
- Comfortable handle
- Easy to operate and save time

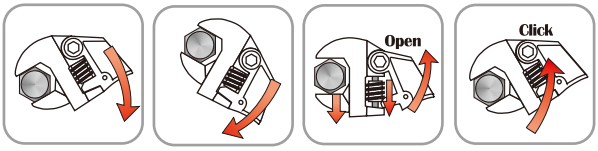

Pipe Wrench

6531

- High quality steel

KING TONY	Size (inch)	A (mm)	L (mm)	kg	
6531-10	10	30	229	0.60	24
6531-12	12	40	272	0.78	24
6531-14	14	50	316	1.05	12
6531-18	18	60	405	1.72	12
6531-24	24	75	541	3.15	6
6531-36	36	85	825	6.28	2
6531-48	48	110	1034	9.75	2

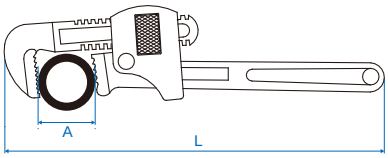

Special Purpose Wrench

3203

- Strap wrench for oil filter

KING TONY	Capacity (mm)	Total Length (mm)	(inch)	g	
3203	Ø 60~140	223	8-3/4	242	50
3203A0	Ø 60~260	223	8-3/4	300	50

3204

- Chain wrench for oil filter

KING TONY	Capacity (mm)	Total Length (mm)	(inch)	g	
3204	Ø 60~140	225	8-3/4	359	50

Assembling Wheel Nut Wrench

1996

PAT. 192461

- Chrome vanadium alloy steel
- For most car wheel nuts in metric
- Polished, chrome plated

KING TONY	(mm)	(inch)	(inch)	L (mm)	kg	
19961721	17 19	13/16"	1/2"	300	1.1	20



Wheel Nut Wrench

1991

- Chrome vanadium alloy steel
- For most car wheel nuts in metric
- Polished, chrome plated
- DIN 3119 ISO 6788

KING TONY	(mm)	(inch)	L (mm)	g	
19911722	17 19 21 22	1/2"	400	1700	6
199104R	19	1/2"	34	84	-

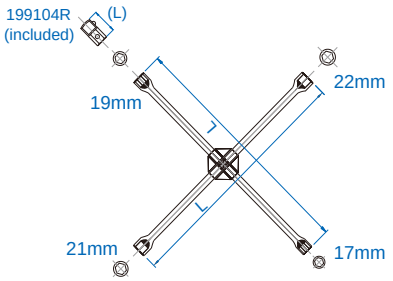

1993

- Chrome vanadium alloy steel
- For most car wheel nuts in metric
- Polished, chrome plated

KING TONY	(mm)	(inch)	L (mm)	g	
19932427	24 27 32	3/4"	700	4333	4





Socket Wrench

1184 M

- Chrome vanadium alloy steel
- T-shaped long arm type
- Deep socket driver
- DIN 475

KING TONY	Size (mm)	ℓ (mm)	L (mm)	g	
118406M	6	120	190	53	10 / 40
118407M	7	120	190	73	10 / 40
118408M	8	200	300	212	10 / 40
118409M	9	200	300	307	10 / 40
118410M	10	200	300	317	10 / 40
118411M	11	200	300	327	10 / 40
NEW 118412M	12	200	300	328	10 / 40
118413M	13	200	300	333	10 / 40
118414M	14	200	300	345	10 / 40
118417M	17	250	300	602	6 / 24

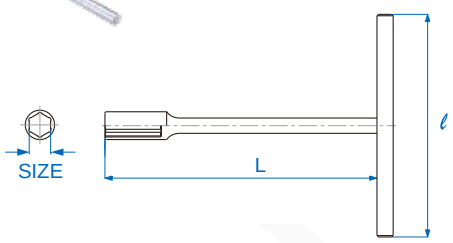

Socket Wrenches

1185 M

- Chrome vanadium alloy steel
- T-shaped long arm type
- Standard socket driver
- DIN 475

KING TONY	Size (mm)	ℓ (mm)	L (mm)	g	
118508M	8	200	250	186	10 / 100
118509M	9	200	250	231	10 / 100
118510M	10	200	250	228	10 / 100
118511M	11	200	250	234	10 / 100
118512M	12	250	250	386	10 / 60
118513M	13	250	300	421	10 / 60
118514M	14	250	300	429	10 / 60
118517M	17	300	360	710	6 / 36
118519M	19	300	360	725	6 / 36

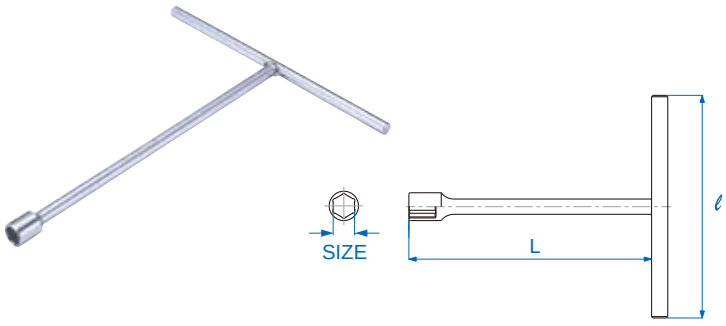

T-shaped Driver

3511

- Chrome vanadium alloy steel
- 3/8" square drive

KING TONY	ℓ (mm)	L (mm)	g	
3511-06	170	268	325	5 / 30
3511-10	250	268	386	6 / 30

4511

- Chrome vanadium alloy steel
- 1/2" square drive

KING TONY	ℓ (mm)	L (mm)	g	
4511-06	170	268	400	5 / 30
4511-10	250	268	468	6 / 30

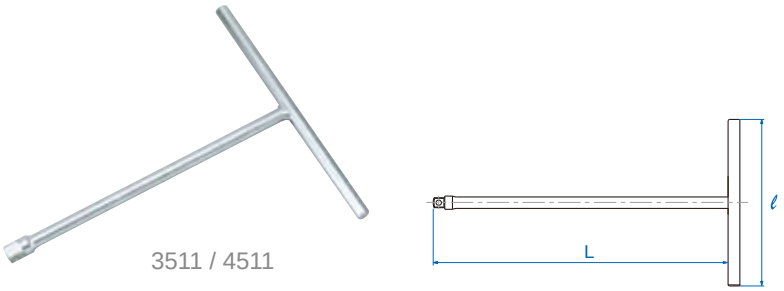

T-type Spark Plug Socket

1563

- Chrome vanadium alloy steel
- T-type spark plug socket

KING TONY	Size (mm)	ℓ (mm)	L (mm)	g	
15631612	16	200	300	363	40
15631615	16	200	385	400	40
15631618	16	200	460	450	40
15632112	21	200	300	388	40
15632115	21	200	385	438	40
15632118	21	200	460	488	40

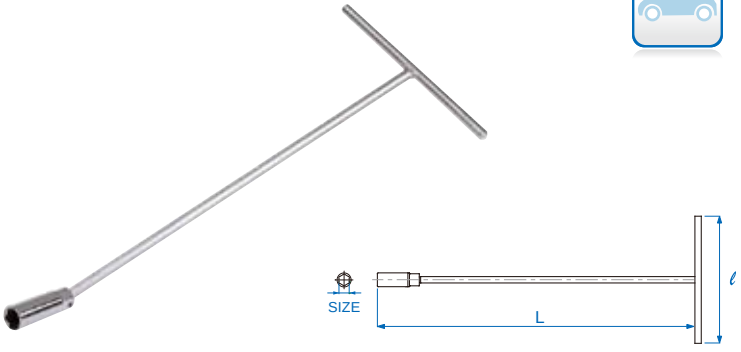

T-type Spark Plug Socket

1566

- Chrome vanadium alloy steel
- T-type universal spark plug socket with magnet

KING TONY	Size (mm)	ℓ (mm)	L (mm)	g	
15661612	16	200	300	400	40
15661615	16	200	385	420	40
15661618	16	200	460	460	40
15662112	21	200	300	420	40
15662115	21	200	385	460	40
15662118	21	200	460	510	40

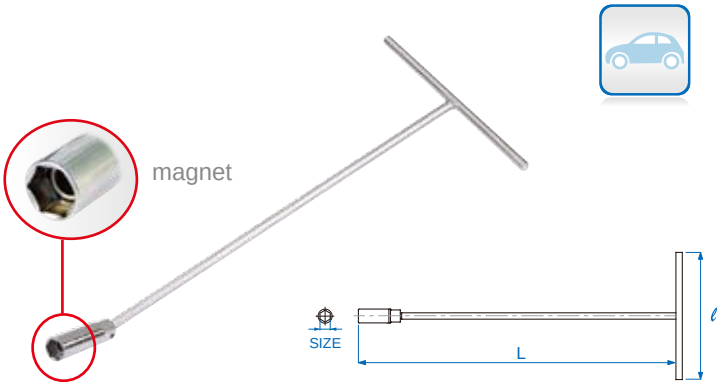

T-type Universal Joint

3795

- Chrome vanadium alloy steel
- 3/8" drive T-type universal joint

KING TONY	ℓ (mm)	L (mm)	g	
3795-15	200	375	375	10 / 40
3795-18	200	455	425	10 / 40
3795-24	200	600	500	10 / 40
3795-30	200	750	600	10 / 30

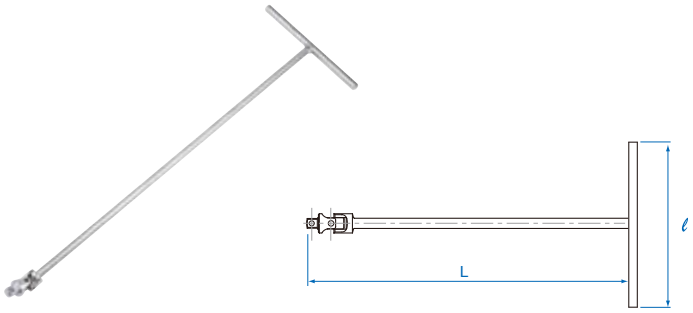

4795

- Chrome vanadium alloy steel
- 1/2" drive T-type universal joint

KING TONY	ℓ (mm)	L (mm)	g	
4795-18	200	460	567	10 / 30
4795-24	200	600	700	10 / 30
4795-30	200	750	850	10 / 20
4795-36	200	900	1000	10 / 20

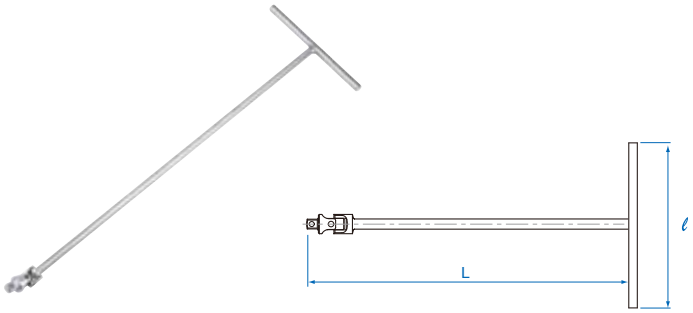

T-type Universal Socket Wrench

5742

- Chrome vanadium alloy steel
- T-type universal socket wrench

KING TONY	SIZE (mm)	ℓ (mm)	L (mm)	g	
574208M	8	200	320	328	40
574210M	10	200	320	330	40
574212M	12	200	320	332	40
574213M	13	200	320	333	40
574214M	14	200	320	335	40
574217M	17	200	320	340	40

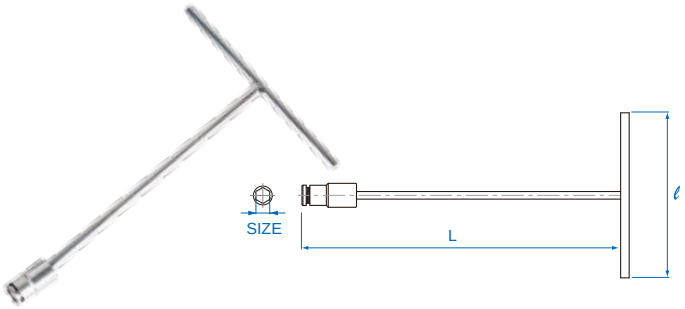

5752

- Chrome vanadium alloy steel
- T-type universal socket wrench

KING TONY	SIZE (mm)	ℓ (mm)	L (mm)	g	
575208M	8	200	450	427	40
575210M	10	200	450	430	40
575212M	12	200	450	432	40
575213M	13	200	450	433	40
575214M	14	200	450	435	40
575217M	17	200	450	440	40

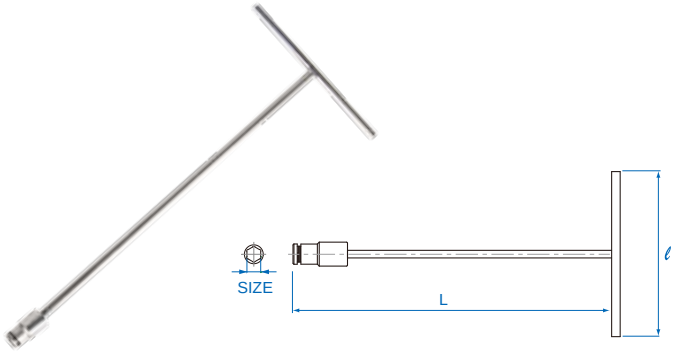

5755

- Chrome vanadium alloy steel
- T-type universal socket wrench

KING TONY	SIZE (mm)	ℓ (mm)	L (mm)	g	
575510M	10	200	396	400	40
575512M	12	200	400	400	40

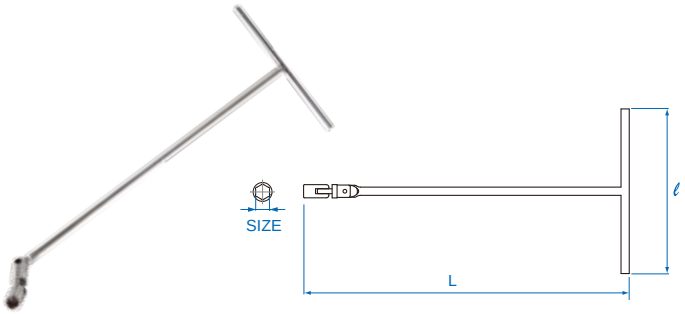

5762

- Chrome vanadium alloy steel
- T-type universal socket wrench

KING TONY	SIZE (mm)	ℓ (mm)	L (mm)	g	
576208M	8	200	600	519	40
576210M	10	200	600	520	40
576212M	12	200	600	522	40
576213M	13	200	600	523	40
576214M	14	200	600	525	40
576217M	17	200	600	540	40

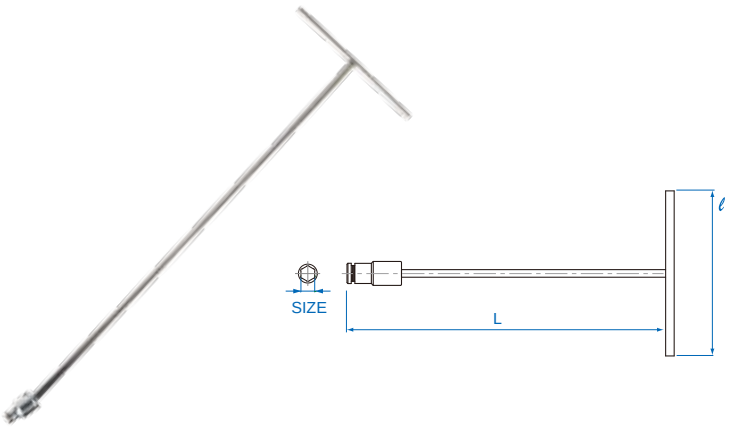

T-type Universal Socket Wrench

5772 NEW

- Chrome vanadium alloy steel
- T-type universal socket wrench

KING TONY	SIZE (mm)	ℓ (mm)	L (mm)	g	
577208M	8	200	400	425	10 / 40
577210M	10	200	400	425	10 / 40
577212M	12	200	400	425	10 / 40
577213M	13	200	450	425	10 / 40
577214M	14	200	450	425	10 / 40
577217M	17	200	450	425	10 / 40

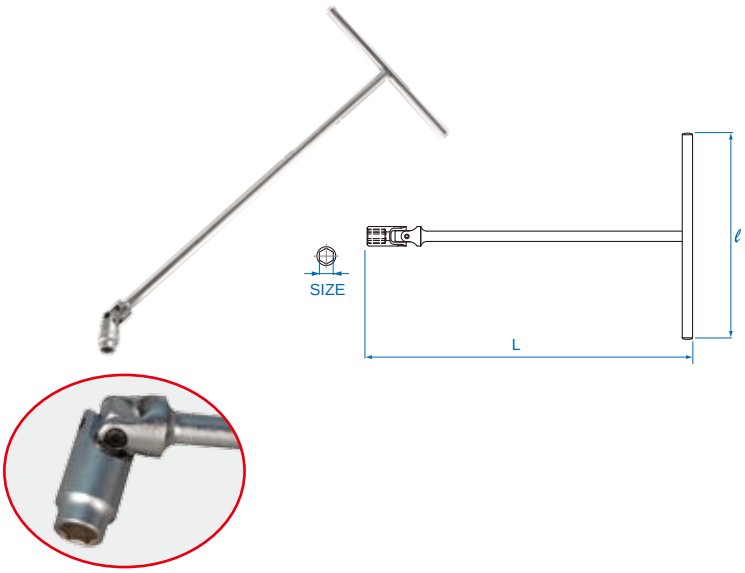

Pliers

KING TONY
KINGTONY
CHROME VAN

KINGTONY
6116-07A

Combination Pliers

6111

- European type
- Polished head
- Grip material - PP + TPR
- DIN ISO 5746

KING TONY	L (mm)	L (inch)	Cutting Capacties(mm) Soft wire	Medium hard wire	Hard wire	Piano wire	g	
6111-06	163	6-1/2	4.0	2.8	1.8	1.6	200	8 / 96
6111-07	188	7-1/2	4.0	3.0	2.0	1.6	260	8 / 80
6111-08	213	8-1/4	4.0	3.0	2.0	1.6	340	8 / 72

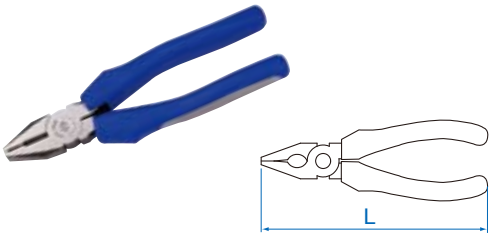

6112

- Hi-leverage type
- Polished heads

KING TONY	L (mm)	L (inch)	Material	Cutting Capacties(mm) Soft wire	Medium hard wire	Hard wire	Piano wire	g	
6112-09A	225	9	PP+TPR	4.0	3.0	2.0	2.2	359	6 / 60
6112-09C	225	9	PVC	4.0	3.0	2.0	2.2	359	6 / 60

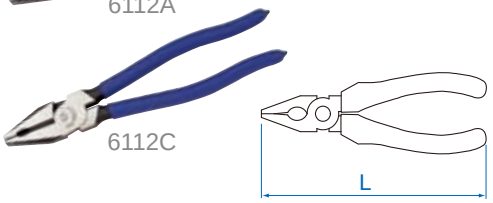

6114

- Mini type
- Grip material - PP + TPR
- DIN ISO 5746

KING TONY	L (mm)	L (inch)	Cutting Capacties(mm) Soft wire	Medium hard wire	Hard wire	g	
6114-05	140	5-1/2	3.0	2.0	1.6	100	8 / 160



Long Nose Pliers

● Grip material - PP +TPR

6311

- European type
- DIN ISO 5745

KING TONY	L (mm)	L (inch)	Cutting Capacties(mm) Soft wire	Medium hard wire	Hard wire	Piano wire	g	
6311-06	163	6-1/2	4.0	2.8	1.8	1.6	150	10 / 120
6311-08	200	8	4.0	3.0	2.0	1.6	220	8 / 80



6313

- Japanesque type
- DIN ISO 5745

KING TONY	L (mm)	L (inch)	Cutting Capacties(mm) Soft wire	Medium hard wire	Hard wire	Piano wire	g	
6313-06	163	6-1/2	4.0	2.8	1.8	1.6	140	10 / 100

6314

- Mini type
- DIN ISO 5745

KING TONY	L (mm)	L (inch)	Cutting Capacties(mm) Soft wire	Medium hard wire	Hard wire	g	
6314-05	134	5-1/4	3.0	2.0	1.6	105	8 / 160



Diagonal Cutting Nippers

- Grip material - PP + TPR
- Polished heads

6211

- European type
- DIN 5749

KING TONY	L (mm)	L (inch)	Cutting Capacties(mm) Soft wire	Medium hard wire	Hard wire	Piano wire	g	
6211-06	163	6-1/2	4.0	2.8	2.0	1.6	180	8 / 96

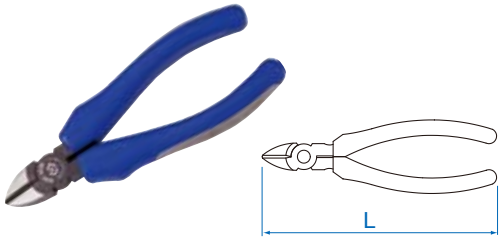

6213

- Japanesque type

KING TONY	L (mm)	L (inch)	Cutting Soft wire	g	
6213-06	163	6-1/2	1.25	140	8 / 96

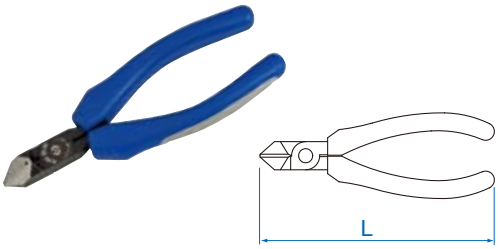

6214

- Mini type

KING TONY	L (mm)	L (inch)	Ø Max.mm Soft wire	g	
6214-45	115	4-1/2	0.6	97	8 / 160
6214-05	127	5	1.25	105	8 / 160

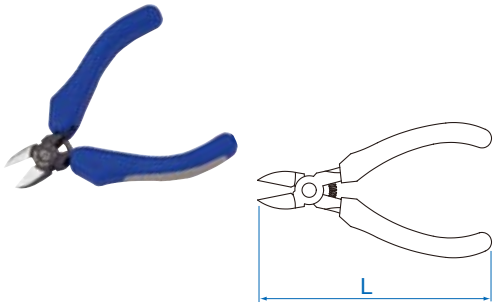

6231

- Heavy duty type
- DIN ISO 5749

KING TONY	L (mm)	L (inch)	Cutting Capacties(mm) Soft wire	Medium hard wire	Hard wire	Piano wire	g	
6231-07	188	7-1/2	5.0	3.5	2.2	2.0	220	8 / 80
6231-08	200	8	4.0	3.0	2.2	2.0	280	8 / 80

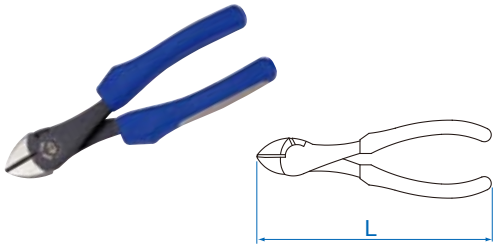

Bent Nose Pliers

- Grip material - PP + TPR

6331

- European type
- DIN ISO 5745

KING TONY	L (mm)	L (inch)	Cutting Capacties(mm) Soft wire	Medium hard wire	Hard wire	Piano wire	g	
6331-06	163	6-1/2	4.0	2.8	1.8	1.6	160	10 / 100
6331-08	200	8	4.0	3.0	2.0	1.6	200	8 / 80

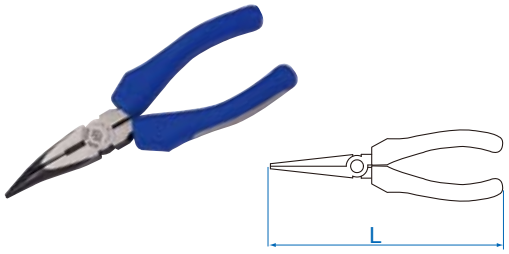

6334

- Mini type
- DIN ISO 5745

KING TONY	L (mm)	L (inch)	Cutting Capacties(mm) Soft wire	Medium hard wire	Hard wire	g	
6334-05	127	5	3.0	2.0	1.6	105	8 / 160

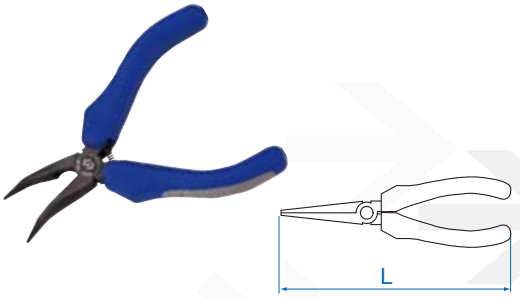

End Cutting Pliers

6411

- European type
- Grip material - PP + TPR
- DIN ISO 5748

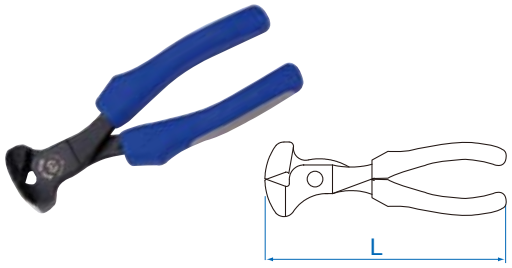

KING TONY	L (mm)	L (inch)	Cutting Capacties(mm) Soft wire	Medium hard wire	Hard wire	Piano wire	g	
6411-06	163	6-1/2	4.0	3.0	1.6	1.6	240	8 / 80

6431

- European type
- Grip material - PVC
- DIN ISO 9242

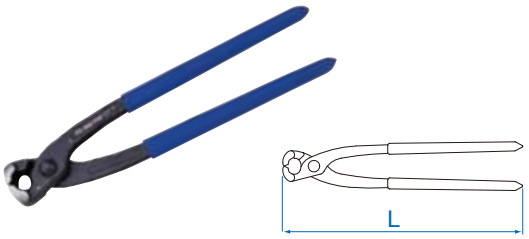

KING TONY	L (mm)	L (inch)	Cutting Capacties(mm) Soft wire	Medium hard wire	Hard wire	g	
6431-10	254	10	3.0	2.0	1.6	445	6 / 48
6431-11	278	11	3.0	2.2	1.8	510	6 / 48

Groove Joint Pliers

6511

- 7 positions opening
- DIN ISO 8976

6511-10A

6511C



KING TONY	A (mm)	B (mm)	L (mm)	L (inch)	(mm)	g	
6511-10A	33	50	253	10	50	400	6 / 48
6511-10C	33	50	253	10	50	400	6 / 48
6511-13C	43	50	325	13	65	808	2 / 16
6511-17C	58	55	425	17	100	1150	2 / 12

6516

- German type
- 7 positions opening
- Grip material - PVC
- DIN ISO 8976

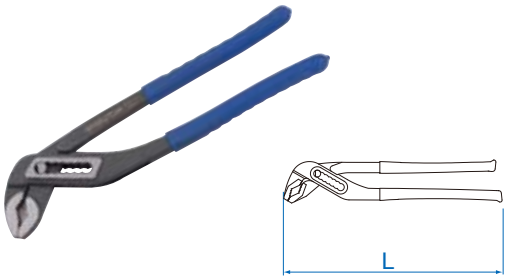

KING TONY	L (mm)	L (inch)	(mm)	g	
6516-10	253	10	36	300	8 / 64

Stripping Pliers

6711

- With spring and adjusting screw

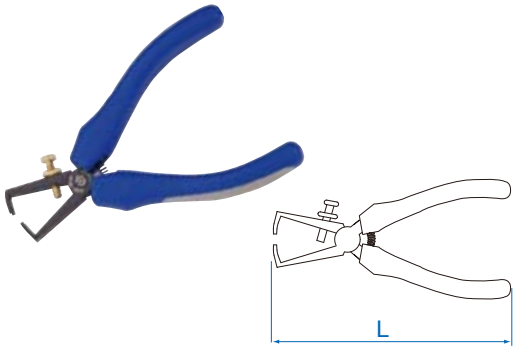

KING TONY	L (mm)	L (inch)	Ø mm	g	
6711-06	155	6	5	160	8 / 80

Circlip Pliers

67HS & 67HB
68HS & 68HB

- For internal retaining rings
- Straight and angled pattern
- DIN 5254 & DIN 5256

KING TONY	Overall Length (mm)	(inch)	Ø- tips	Capacity Ø mm	g	
67HS-07	180	7	1.8	20~62	130	12 / 144
67HB-07	180	7	1.8	20~62	130	12 / 144
68HS-05	125	5	1.3	12~28	126	10 / 80
68HS-07	180	7	1.8	20~62	130	12 / 144
68HS-10	250	10	2.3	40~100	291	8 / 64
68HB-05	125	5	1.3	12~28	119	10 / 80
68HB-07	170	6-3/4	1.8	20~62	130	12 / 144
68HB-10	241	9-1/2	2.3	40~100	291	6 / 48

67HS 67HB 68HS 68HB

Japanesque type European type

67SS & 67SB
68SS & 68SB

- For external retaining rings
- Straight and angled pattern
- DIN 5254 & DIN 5256

KING TONY	Overall Length (mm)	(inch)	Ø- tips	Capacity Ø mm	g	
67SS-07	180	7	1.8	20~62	130	12 / 144
67SB-07	180	7	1.8	20~62	130	12 / 144
68SS-05	125	5	1.3	12~28	126	10 / 80
68SS-07	180	7	1.8	20~62	130	12 / 144
68SS-10	250	10	2.3	40~100	291	8 / 64
68SB-05	125	5	1.3	12~28	119	10 / 80
68SB-07	170	6-3/4	1.8	20~62	130	12/ 144
68SB-10	241	9-1/2	2.3	40~100	291	6 / 48

67SS 67SB 68SS 68SB

Japanesque type European type

Slip Joint Pliers

6463

- 2 position adjustment
- Serrated jaws

KING TONY	L (mm)	(inch)	g	
6463-08C	210	8	290	8 / 80

6463-08C



Plastic Pliers

6921

- European type
- Polished heads
- CAUTION : In order to get normal life of plier, do not cut steel wire.

KING TONY	L (mm)	(inch)	Grip Material	g	
6921-05A	132	5	PP + TPR	89	6 / 120
6921-06A	155	6	PP + TPR	132	8 / 96
6921-07A	178	7	PP + TPR	170	6 / 60
6921-05C	132	5	PVC	89	6 / 120
6921-06C	155	6	PVC	132	6 / 60
6921-07C	178	7	PVC	170	6 / 60

6921A



6921C



Circlip Pliers Set

42114GP

KING TONY	PC./SET	Contents	g	
42114GP	4	68HS-07, 68HB-07, 68SS-07, 68SB-07	0.62	32

42116GP

KING TONY	PC./SET	Contents	g	
42116GP	6	68HS-07, 68HB-07, 68HS-10, 68SS-07, 68SB-07, 68SS-10	1.33	18

European Type Pliers Set

42104GP

KING TONY	PC./SET	Contents	g	
42104GP	4	6111-06, 6211-06, 6311-08, 6511-10A	1.17	18

42104GP01

KING TONY	PC./SET	Contents	g	
42104GP01	4	6111-06, 6211-06, 6311-08, 6516-10	1.17	18

Combination Pliers(European type)

1000V

- Grip material-TPR.
- Polished heads.

6116-07A / 6116-08A

- Chrome vanadium steel
- IEC DIN EN 60900

KING TONY	L (mm)	L (inch)	Cutting Capacties(mm) Soft wire	Medium hard wire	Hard wire	Piano wire	g	
6116-07A	185	7-1/2	4.0	3.0	2.0	1.6	290	10 / 60
6116-08A	200	8	4.0	3.0	2.0	1.6	386	10 / 60

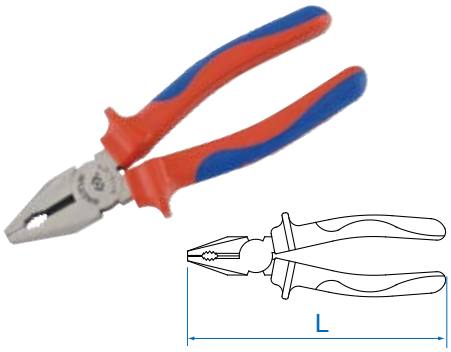

Long Nose Pliers

- Grip material-TPR.
- Polished heads.

6318-08A

- Chrome vanadium steel
- IEC DIN EN 60900

KING TONY	L (mm)	L (inch)	Cutting Capacties(mm) Soft wire	Medium hard wire	Hard wire	Piano wire	g	
6318-08A	210	8-1/4	4.0	3.0	2.0	1.6	250	10 / 60

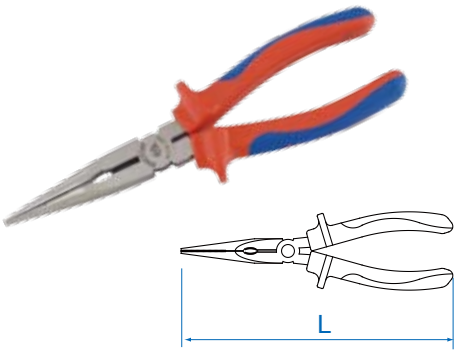

Diagonal Cutting Pliers

- Grip material-TPR.
- Polished heads.

6216-06A

- Chrome vanadium steel
- IEC DIN EN 60900

KING TONY	L (mm)	L (inch)	Cutting Capacties(mm) Soft wire	Medium hard wire	Hard wire	Piano wire	g	
6216-06A	167	6-1/2	4.0	2.8	2.0	1.6	230	10 / 60

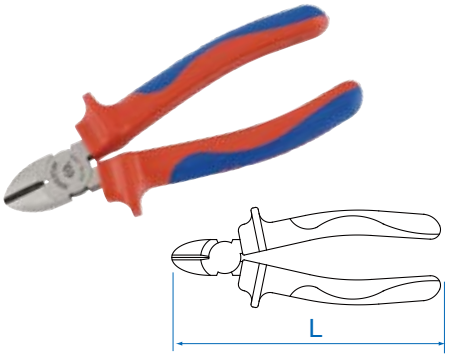

Diagonal Cutting Pliers(Heavy Duty)

- Grip material-TPR.
- Polished heads.

6236-07A

- Chrome vanadium steel
- IEC DIN EN 60900

KING TONY	L (mm)	L (inch)	Cutting Capacties(mm) Soft wire	Medium hard wire	Hard wire	Piano wire	g	
6236-07A	190	7-1/2	5.0	3.5	2.2	2.0	280	10 / 60

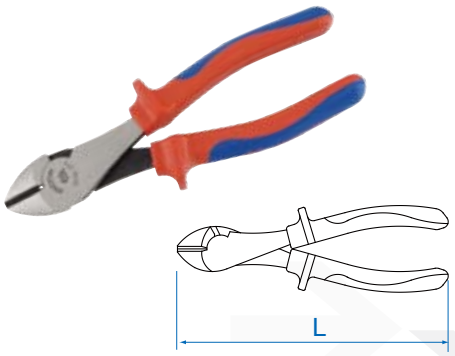

Bent Nose Pliers

1000V

- Grip material-TPR.
- Polished heads.

6336-08A

- Chrome vanadium steel
- IEC DIN EN 60900



KING TONY	L (mm)	L (inch)	Cutting Capacties(mm) Soft wire	Medium hard wire	Hard wire	Piano wire	g	
6336-08A	200	8	4.0	3.0	2.0	1.6	250	10 / 60

Cable Cutting Pliers

- Grip material-TPR.
- Polished heads.

6146-08A

- Chrome vanadium steel
- IEC DIN EN 60900



KING TONY	L (mm)	L (inch)	(mm) Ø mm	g	
6146-08A	214	8-1/4	14	360	10 / 60

Wire Stripping Pliers(With Spring)

- Grip material-TPR.
- Polished heads.

6716-06A

- Chrome vanadium steel
- IEC DIN EN 60900



KING TONY	L (mm)	L (inch)	Ø mm	g	
6716-06A	160	6-1/4	5	205	10 / 60

Water Pump Pliers(Box Joint)

- Grip material-TPR.
- Polished heads.

6516-10A

- Chrome vanadium steel
- IEC DIN EN 60900



KING TONY	L (mm)	L (inch)	(mm)	g	
6516-10A	250	10	36	420	10 / 50

Lock - Grip Pliers

- MATERIAL - chrome molybdenum alloy steel
- FINISHING - option 1 : chrome plated (R)
  option 2 : nickel plated (N)

6011

- Curved jaw with wire cutter
- With adjusting screw and release lever
- Jaw width 10mm, length 30mm
- ASME B107.24

KING TONY	Overall Length (mm)	(inch)	Jaw Capacity (mm)	g	
6011-05R	140	5-1/2	29	166	6 / 48
6011-07R	185	7	38	367	8 / 32
6011-07N	185	7	38	367	8 / 32
6011-10R	225	9	48	542	8 / 32
6011-10N	225	9	48	542	8 / 32

6011R

6011N

6031

- Straight jaw
- With adjusting screw and release lever
- Jaw width 10mm, length 30mm
- ASME B107.24

KING TONY	Overall Length (mm)	(inch)	Jaw Capacity (mm)	g	
6031-07R	185	7	33	392	8 / 32
6031-07N	185	7	33	392	8 / 32
6031-10R	225	9	45	573	8 / 32
6031-10N	225	9	45	573	8 / 32

6031R

6031N

Miniature Long Nose Pliers

6315

- ASME B107.24

KING TONY	Overall Length (mm)	(inch)	Jaw Capacity (mm)	g	
6315-06	165	6	51	205	8 / 64
6315-09	221	9	70	393	36

6315

Lock Sheet Metal Grip Pliers

6605

- Material-chrome molybdenum alloy steel.
- Finishing-nickel plated.
- With adjusting screw and release lever
- Makes bending, forming, and crimping sheet metal easier.

KING TONY	Overall Length (mm)	(inch)	Jaw Capacity (mm)	g	
6605-08	206	8	13	455	1/18

6605

Lock Chain Grip Pliers

6655-09

- Chain can hold around any shape or size.
- Convenient for awkwardly shaped pieces.
- With adjusting screw and release lever.

KING TONY	Total Length (mm)	(inch)	Capacity (mm)	g	
6655-09	225	9	Ø 60~140	733	20

6665-09

- U-shaped jaws allow enhanced visibility and more working space
- Holds work in proper alignment
- For use in welding or holding awkward shapes in place

KING TONY	Total Length (mm)	(inch)	Jaw Capacity (mm)	g	
6665-09	230	9	43	625	20

C-clamp Grip Pliers

6615

KING TONY	Total Length (mm)	(inch)	Jaw Capacity (mm)	g	
6615-06	170	6-3/4	50	230	6 / 72
6615-11	280	11	100	790	20
6615-18	456	18	200	1136	15

6615-06 6615-11

6615-18

6625

- C-clamp grip pliers with moving jaw

KING TONY	Total Length (mm)	(inch)	Jaw Capacity (mm)	g	
6625-06	175	7	54	250	6 / 72
6625-11	280	11	96	840	20
6625-18	467	18-1/2	200	1220	15

6625-06 6625-11

6625-18

Crimping Tool

6721-10

- Wire cutter.
- Crimps insulated terminals.
- Bolt cutter.
- Crimps non-insulated terminals.(Open barrel)
- Wire stripper.

FUNCTION:


Wire cutter



Open barrel terminal crimping


Non-Insulated terminal Crimping


Bolt-cutter


Insulated terminal Crimping


Wire stripper

KING TONY	Wire cutter Ø mm²	Insulated terminal Crimping	Bolt-cutter	Non insulated terminal crimp	Open barrel terminal crimping	Wire stripper mm²	g	
6721-10	6	0.5~6	M2.6~5	0.5~6	1.5~6	0.75~6.0	248	10 / 50

6731-09

- Wire cutter.
- Crimps insulated terminals.
- Bolt cutter.
- Crimps non-insulated terminals.
- Wire stripper.

FUNCTION:


Wire cutter


Insulated terminal Crimping


Bolt-cutter


Wire stripper



Open barrel terminal crimping

KING TONY	Wire cutter Ø mm²	Insulated terminal Crimping	Bolt-cutter	Open barrel terminal crimping	Wire stripper mm²	g	
6731-09	6	1.5~6	M2.6~5	1.5~6	0.75~6.0	230	10 / 100

6741-06

- Wire cutter.
- Wire stripper.

FUNCTION:


Wire cutter


Wire stripper


Peel the electric wire's shell

KING TONY	Wire cutter Ø mm²	Wire stripper mm²	g	
6741-06	6	0.5~5.5	103	10 / 100

Snips & Cutter

- Aviation Tin Snips
- Offset Tin Snips
- Figure Tin Snips
- Offset Tin Snips
- Straight Pattern Snips
- Duckbill Circular Pattern Snips
- Steel Strap Cutter
- Electrician Scissors
- Bolt Cutter
- Automatically Reloading Utility Cutter
- Ratchet Tubing Cutter

KING TONY
CRV

Aviation Tin Snips

74010~74060

- Drop forged chorme molybdenum alloy steel.
- Blades with serrated edges.
- Perfect for professional user.
- Cuts up to 1.2mm rolled steel or 0.7mm stainless steel.
- Induction hardened cutting edges 59-62 HRC.
  - Special laborsaving design
  - High tensile strength provided for longer life
  - High torsional strength spring designed for longer life
  - Solid and comfortable handle with non-slip design
  - Hang-up hole provided for convenient storage
  - Safety auto latch (D.PAT.)

74010

74020

74030

74040

74060

KING TONY	Overall Length (mm)	Cutting Length (mm)	Color of Handle	Cutting Capacities (mm)				kg	
				Copper (soft)	Cold-rolled Steel (soft)	Hard Steel HRC 30 (Hard)	Stainless Steel304		
74010	248	35	Red	1.50	1.20	0.80	0.70	0.375	6 / 48
74020	248	35	Green	1.50	1.20	0.80	0.70	0.375	6 / 48
74030	250	38	Yellow	1.50	1.20	0.80	0.70	0.380	6 / 48
74040	230	25	Yellow	2.00	1.60	1.20	1.20	0.370	6 / 36
74060	290	75	Orange	1.10	0.94	0.70	0.53	0.450	6 / 36

Offset Tin Snips

74150~74160

- Offset blades keep hands away from metal.
- Unique design for professional users.
- Drop forged chrome molybdenum alloy steel blades with serrated edges.
- Induction hardened cutting edges 59-62 HRC.
- Cuts up to 1.2mm cold rolled steel or 0.7mm stainless steel.

74150

74160

KING TONY	Overall Length (mm)	Cutting Length (mm)	Color of Handle	Cutting Capacities (mm)				kg	
				Copper (soft)	Cold-rolled Steel (soft)	Hard Steel HRC 30 (Hard)	Stainless Steel304		
74150	235	35	Red	1.50	1.20	1.00	0.70	0.4	6 / 48
74160	235	35	Blue	1.50	1.20	1.00	0.70	0.4	6 / 48

Figure Tin Snips

74250~74270

- Superior cutting performance.
- Popular in Europe.
- Features high - impact handle with fixed handle open width.
- Drop froged chrome molybdenum alloy steel blades with serrated edges.
- Induction hardened cutting edges 59-62 HRC.
- Cuts up to 1.5mm cold rolled steel or 0.9mm stainless steel.
  - Special laborsaving design
  - High tensile strength provided for longer life
  - High torsional strength spring designed for longer life
  - Solid and comfortable handle with non-slip design
  - Hang-up hole provided for convenient storage
  - Safety auto latch (D.PAT.)

74250

74260

74270

KING TONY	Overall Length (mm)	Cutting Length (mm)	Color of Handle	Cutting Capacities (mm)				kg	
				Copper (soft)	Cold-rolled Steel (soft)	Hard Steel HRC 30 (Hard)	Stainless Steel304		
74250	260	35	Red	1.80	1.50	1.00	0.90	0.480	6 / 36
74260	260	35	Blue	1.80	1.50	1.00	0.90	0.480	6 / 36
74270	260	35	Yellow	1.80	1.50	1.00	0.90	0.480	6 / 36

Offset Tin Snips

74350~74360

- Offset blades keep hands away from metal.
- Superior cutting performance.
- Popular in Europe.
- Features high - impact handle with fixed handle open width.
- Drop froged chrome molybdenum alloy steel blades with serrated edges.
- Induction hardened cutting edges 59-62 HRC.
- Cuts up to 1.5mm cold rolled steel or 0.9mm stainless steel.
  - Special laborsaving design
  - High tensile strength provided for longer life
  - High torsional strength spring designed for longer life
  - Solid and comfortable handle with non-slip design
  - Hang-up hole provided for convenient storage
  - Safety auto latch (D.PAT.)

74350

74360

KING TONY	Overall Length (mm)	Cutting Length (mm)	Color of Handle	Cutting Capacities (mm)				kg	
				Copper (soft)	Cold-rolled Steel (soft)	Hard Steel HRC 30 (Hard)	Stainless Steel304		
74350	260	32	Red	1.80	1.50	1.00	1.00	0.520	6 / 36
74360	260	32	Blue	1.80	1.50	1.00	1.00	0.520	6 / 36

Straight Pattern Snips

74407~74416

- American type.
- Popular for American & Asian users.
- One - piece forged construction.
- Cushion handle with smooth, comfortable bows for ease in use and safety.
- Designed for cutting straight and wide curves to the left or right.
- Drop forged of high carbon steel.
- Indction hardened cutting edges 58 - 61 HRC.

74407 ~ 74416

KING TONY	Overall Length (mm)	Cutting Length (mm)	Color of Handle	Cutting Capacities (mm)				kg	
				Copper (soft)	Cold-rolled Steel (soft)	Hard Steel HRC 30 (Hard)	Stainless Steel304		
74407	178	40	Black	0.60	0.56	0.40	0.38	0.270	10 / 60
74408	203	40	Black	0.70	0.61	0.50	0.41	0.340	6 / 48
74410	254	51	Black	0.94	0.78	0.60	0.45	0.480	6 / 36
74412	305	70	Black	1.15	0.91	0.70	0.63	0.650	6 / 24
74414	356	76	Black	1.41	1.20	1.00	0.70	0.780	6 / 24
74416	415	63	Black	2.00	1.60	1.20	1.00	1.700	3 / 12

Offset Tin Snips

74508~74514

- British type.
- Popular in British Confederation countries & Asia.
- One - piece forged construction.
- Comfortable vinyl coated handles.
- Drop forged of high carbon steel.
- Induction hardened cutting edges 58 - 61 HRC.

74508 ~ 74514

KING TONY	Overall Length (mm)	Cutting Length (mm)	Color of Handle	Cutting Capacities (mm)				kg	
				Copper (soft)	Cold-rolled Steel (soft)	Hard Steel HRC 30 (Hard)	Stainless Steel304		
74508	203	42	Blue	0.70	0.61	0.50	0.41	0.330	6 / 48
74510	245	52	Blue	0.94	0.78	0.60	0.45	0.440	6 / 36
74512	305	60	Blue	1.15	0.91	0.70	0.63	0.670	6 / 24
74514	356	65	Blue	1.40	1.20	100	0.70	0.920	6 / 24

Duckbill Circular Pattern Snips

74607~74613

- American type.
- Popular for American & Asian users.
- One - piece forged construction.
- Cushion handle with smooth, comfortable bows for ease in use and safety.
- Designed for cutting straight and wide curves to the left or right.
- Drop forged of high carbon steel.
- Indction hardened cutting edges 58 - 61 HRC.

74607 ~ 74613

KING TONY	Overall Length (mm)	Cutting Length (mm)	Color of Handle	Cutting Capacities (mm)				kg	
				Copper (soft)	Cold-rolled Steel (soft)	Hard Steel HRC 30 (Hard)	Stainless Steel304		
74607	178	40	Blue	0.60	0.54	0.38	0.38	0.250	10 / 60
74610	254	51	Blue	0.94	0.61	0.45	0.45	0.460	6 / 36
74613	330	72	Blue	1.20	0.84	0.61	0.61	0.720	6 / 24

Steel Strap Cutter

74900

- One - piece forged construction.
- Durable vinyl coated handles.
- Drop forged of high carbon steel.
- Induction hardened cutting edges 58-61 HRC.
- Cuts up to 28mm in width, 0.8mm in thickness.

74900

KING TONY	Overall Length (mm)	Cutting Length (mm)	Color of Handle	Cutting Capacities (mm)				kg	
				Copper (soft)	Cold-rolled Steel (soft)	Hard Steel HRC 30 (Hard)	Stainless Steel304		
74900	305	32	Red	-	1.00	0.80	0.60	0.750	6 / 24

Electrician Scissors

● Grip material - PP + TPR

6AB12-55

- Electronic scissors

KING TONY	Overall Length (mm)	(mm)	Cutting Capacities (mm)							g	
			Electric Cable	Cardboard	Rubber	Leather	Rolled Steel	Copper (soft)	Aluminum		
6AB12-55	145	55	10	10	10	10	0.5	0.5	0.5	94.26	12 / 72

18 mm Automatically Reloading Utility Cutter

7971-07

- Automatically reloading snap-off blades.
- Ergonomic soft ABS TPR handle.
- Stainless steel blade guide.
- Blade lock knob.
- 4-blade cartridge.

KING TONY	L (mm)	g	
7971-07	165	180	12 / 72

7971-07P01
(18mm, 5 PC.)

● Blade reloading automatically

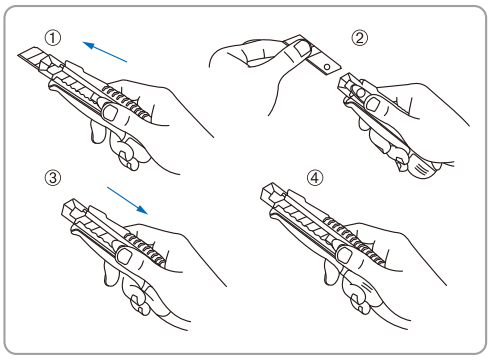

● Knob-lock mechanism

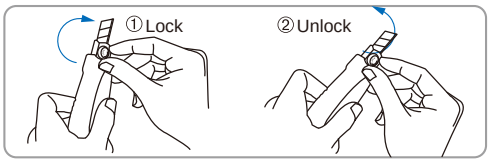

● Blade snapped

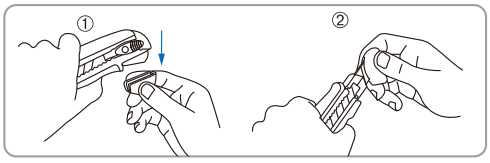

Bolt Cutter

6131

● GS / TUV

- Chrome vanadium alloy steel
- Center cut

KING TONY	Total Length (mm)	Total Length (inch)	Capacity materials (mm)	kg	
6131-12	300	12	5	0.76	20
6131-14	350	14	7	1.00	20
6131-18	450	18	8	1.51	12
6131-24	600	24	10	2.35	10
6131-30	750	30	13	3.75	6
6131-36	900	36	16	5.50	5
6131-42	1050	42	18	8.56	3

6131

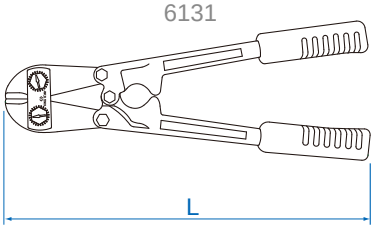

6131P01

- Spare blade for 6131
- Center cut

KING TONY	Total Length (mm)	Total Length (inch)	Capacity materials (mm)	kg	
6131-12P01	95 x 57	12	4~5	0.26	40
6131-14P01	110 x 65	14	5~7	0.40	40
6131-18P01	125 x 72	18	6~8	0.85	20
6131-24P01	150 x 86	24	8~10	0.87	20
6131-30P01	170 x 97	30	9~13	1.25	10
6131-36P01	190 x 112	36	11~16	1.85	10
6131-42P01	205 x 122	42	13~18	3.10	5

Ratchet Tubing Cutter

7912-21&7912-22

EASY OPERATION

- Use standard hex key to remove back-up blade located in the handle base.



- Deploy foldable reamer provided to smoothen sharp edges.



1. Place tube securely between cutter jaws.



2. Rotate clock-wise to tighten jaw grip.



3. Pull knob out, down & release in a single action to start cutting procedure.



4. Repeat "Up & Down" action until open face up.



5. Tighten tool around the tube when needed. Repeat each actions until tube is cut.



ADDED VALUE:

- Comes with spare blade.
- Provided with foldable reamer.

INNOVATIVE FEATURES:

- Cuts without having to rotate tool completely around tubing.
- Ratchet mechanism allows for tight area operation.
- Cuts through some of the toughest surfaces: stainless steel, wall conduit, copper and aluminum.
- Exclusive one hand operation. Limited risks of hand-fatigue and injuries.

7912-21 / 7912-22

KING TONY	CAPACITY O (mm)	Max. Cutting Thickness(mm)		DESCRIPTION	g		Remark: w / blades
		Stainless	Other				
7912-21	8-28.5	2	3.0	w/o reamer, w / blades	389	1 / 40	with spare blades
7912-22	12-35	2	3.0	w / blades	452	1 / 40	

7912-23

EASY OPERATION

1. Place tube securely between cutter jaws.



2. Rotate clock-wise to tighten jaw grip.



3. Pull knob out, down & release in a single action to start cutting procedure.



4. Repeat "Up & Down" action until open face up.



5. Tighten tool around the tube when needed. Repeat each actions until tube is cut.



INNOVATIVE FEATURES:

- Cuts without having to rotate tool completely around tubing.
- Ratchet mechanism allows for tight area operation.
- Cuts through some of the toughest surfaces: stainless steel, wall conduit, copper and aluminum.
- Exclusive one hand operation.
- Limited risks of hand-fatigue and injuries.
- Apply to cut car's exhaust pipe.





7912-23

KING TONY	CAPACITY O (mm)	Max. Cutting Thickness(mm)		g	
		Stainless	Other		
7912-23	32-67	2	3.0	1122.6	1 / 10

Screwdriver & Key

- Screwdriver & Set
- Heavy Duty Screwdriver
- Nutspinner
- Power Bits
- Screwdriver Handle
- Insulated Screwdriver & Set
- Precision Screwdriver & Set
- Bit & Set
- Bi t Accessory
- Bicycle Tool Set
- Hex Key Wrench & Set
- Ball Hex Key Wrench & Set
- Star L-wrench & Set
- L-type Wrench & Set
- T-type Wrench

& Bit

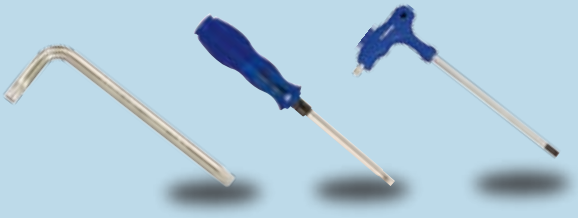

Standard Screwdriver Set

31416MR

- 96 PC. standard screwdriver shelf set

	Contents					Each Q'ty
31416MR	1421 ⊕	No.0 x 60	No.1 x 80	No.1 x 100	No.2 x 38	6
		No.2 x 100	No.2 x 150	No.3 x 150		
	1422 ⊖	3.0 x 75	4.0 x 100	5.5 x 75		
		5.5 x 100	5.5 x 125	6.5 x 38		
		6.5 x 100	6.5 x 150	8.0 x 150		

	kg	CUFT	Screwdriver shelf size (mm)
31416MR-A	3.3	1.97	600 x 240 x 210
31416MR-D	6.2	0.71	

31516MR

- 96 PC. standard & heavy duty screwdriver shelf set

	Contents					Each Q'ty
31516MR	1427	T8 x 75	T9 x 75	T10 x 75		6
		T15 x 75	T20 x 100	T25 x 100		
		T27 x 100	T30 x 125	T40 x 150		
	1461 ⊕	No.1 x 75	No.2 x 100	No.3 x 150		
	1462 ⊖	5.5 x 100	6.5 x 100	6.5 x 150	8.0 x 175	

	kg	CUFT	Screwdriver shelf size (mm)
31516MR-A	3.3	1.97	600 x 240 x 210
31516MR-D	10.1	0.71	

31519MR

- 114 PC. standard screwdriver shelf set

	Contents					Each Q'ty
31519MR	1411 ⊕	No.0 x 75	No.1 x 100	No.2 x 100	No.2 x 100E*	6
		No.2 x 150	No.2 x 150E*	No.2 x 38	No.3 x 150	
		No.3 x 200				
	1412 ⊖	3.0 x 75	4.0 x 100	5.5 x 100		
		6.5 x 100	6.5 x 150	6.5 x 100E*		
		6.5 x 38	8 x 150	8 x 200	6.5 x 150E*	

* Enlarged handle

	kg	CUFT	Screwdriver shelf size (mm)
31519MR-A	3.5	1.21	650 x 250 x 210
31519MR-D	10.34	0.714	

31512MR

- 72 PC. standard screwdriver shelf set

	Contents				Each Q'ty
31512MR	24110204 ⊕⊖	No.2 x 100	1481 ⊕	No.2 x 125	6
	24110214 ⊕⊖	No.2 x 38	1482 ⊖	6.5 x 150	
31512MR01	1481 ⊕	No.2 x 100	No.1 x 75	1481 ⊕	No.2 x 125E*
		No.2 x 100E*	No.3 x 150		
	1482 ⊖	5.5 x 75	6.5 x 100	1482 ⊖	6.5 x 125E*
		6.5 x 100E*	8 x 150		

* Enlarged handle

	kg	CUFT	Screwdriver shelf size (mm)
31512MR-A	2.47	0.78	420 x 250 x 210
31512MR-D	8.23	0.714	

Standard Screwdriver

- SHANK MATERIAL - CR - V alloy steel
- GRIP MATERIAL - PVC
- FINISHING - chrome plated
  It is used in the working environment less than 60° C

⊕ 1411

- PHILLIPS head, round shank.
- Metric size-DIN ISO 8764-2

KING TONY	⊕ No.	Shank Dia x Length (mm)	Shank Dia x Length (inch)	g	
14110003	0	3 x 75	1/8 x 3	40	12 / 240
14110104	1	5 x 100	3/16 x 4	52	12 / 240
14110214	2	6 x 38	1/4 x 1-1/2	38	12 / 144
14110204	2	6 x 100	1/4 x 4	74	12 / 96
14110204-E*	2	6 x 100	1/4 x 4	109	12 / 96
14110205-E*	2	6 x 125	1/4 x 5	113	12 / 144
14110206	2	6 x 150	1/4 x 6	95	12 / 144
14110206-E*	2	6 x 150	1/4 x 6	119	12 / 144
14110208-E*	2	6 x 200	1/4 x 8	137	12 / 144
14110306	3	8 x 150	5/16 x 6	132	12 / 144
14110308	3	8 x 200	5/16 x 8	151	12 / 144

* Enlarged handle

1411

8781013KT applied to 14110003 ,14110104 , 14110214 ,14110204 ,14110206

8781032KT applied to 14110204-E* , 14110206-E* ,14110208-E* 14110306 ,14110308

⊖ 1412

- SLOTTED head, round shank.
- Metric size-DIN 5263

KING TONY	Tip Width x Shank Length (mm)	Tip Thickness x Shank Diameter (mm)	Tip Width x Shank Length (inch)	g	
14120303	3.0 x 75	0.5 x 3	1/8 x 3	36	12 / 240
14120404	4.0 x 100	0.8 x 4	5/32 x 4	42	12 / 240
14125504	5.5 x 100	0.8 x 5	7/32 x 4	60	12 / 240
14126514	6.5 x 38	1.2 x 6	1/4 x 1-1/2	39	12 / 144
14126504	6.5 x 100	1.2 x 6	1/4 x 4	60	12 / 96
14126504-E*	6.5 x 100	1.2 x 6	1/4 x 4	108	12 / 96
14126506	6.5 x 150	1.2 x 6	1/4 x 6	85	12 / 144
14126506-E*	6.5 x 150	1.2 x 6	1/4 x 6	117	12 / 144
14120806	8.0 x 150	1.2 x 8	5/16 x 6	130	12 / 144
14120808	8.0 x 200	1.2 x 8	5/16 x 8	152	12 / 144

* Enlarged handle

1412

8781013KT applied to 14120303, 14120404 14125504, 14126514, 14126504 14126506

8781032KT applied to 14126504-E* 14126506-E*, 14120806, 14120808

⊕⊖ 2411

- Two-way screwdriver hex shank

KING TONY	⊕ No.	⊖ Tip Width (mm)	⊖ Tip Thickness (mm)	Overall Length (mm)	Overall Length (inch)	g	
24110204	2	7.0	1.2	100	4	74	20 / 160
24110214	2	7.0	1.2	38	1-1/2	42	20 / 240

24110204

24110214

8781032KT applied to 24110204

Standard Screwdriver

- SHANK MATERIAL- SNCM + V alloy steel
- GRIP MATERIAL - PP +TPR
- FINISHING - chrome plated with black tip

⊕ 1421

- PHILLIPS head, round shank.
- Metric size-DIN ISO 8764

KING TONY	⊕ No.	Shank Dia x Length (mm)	Shank Dia x Length (inch)	g	
14210023	0	3.2 x 60	1/8 x 2-3/8	35	12 / 144
14210132	1	4.5 x 80	3/16 x 3-1/8	43	12 / 96
14210104	1	4.5 x 100	3/16 x 4	52	12 / 96
14210214	2	6.0 x 38	1/4 x 1-1/2	38	12 / 144
14210204	2	6.0 x 100	1/4 x 4	74	12 / 96
14210206	2	6.0 x 150	1/4 x 6	95	12 / 144
14210306	3	8.0 x 150	5/16 x 6	132	12 / 144

1421

8781013KT applied to 14210023, 14210132 14210104, 14210204, 14210206
8781032KT applied to 14210306

⊖ 1422

- SLOTTED head, round shank.
- Metric size-DIN ISO 2380

KING TONY	Tip Width x Shank Length (mm)	Tip Thickness x Shank Diameter (mm)	Tip Width x Shank Length (inch)	g	
14220303	3.0 x 75	0.5 x 3	1/8 x 3	36	12 / 144
14220404	4.0 x 100	0.8 x 4	5/32 x 4	42	12 / 96
14220503	5.0 x 75	0.8 x 5	3/16 x 3	40	12 / 96
14220504	5.0 x 100	0.8 x 5	3/16 x 4	45	12 / 96
14225503	5.5 x 75	1.0 x 5	7/32 x 3	50	12 / 96
14225504	5.5 x 100	1.0 x 5	7/32 x 4	60	12 / 96
14225505	5.5 x 125	1.0 x 5	7/32 x 5	70	12 / 144
14225506	5.5 x 150	1.0 x 5	7/32 x 6	80	12 / 144
14226514	6.5 x 38	1.2 x 6	1/4 x 1-1/2	39	12 / 144
14226504	6.5 x 100	1.2 x 6	1/4 x 4	60	12 / 96
14226506	6.5 x 150	1.2 x 6	1/4 x 6	85	12 / 144
14220806	8.0 x 150	1.2 x 8	5/16 x 6	130	12 / 144
14220807	8.0 x 175	1.2 x 8	5/16 x 7	141	12 / 144
14220808	8.0 x 200	1.2 x 8	5/16 x 8	152	12 / 144

1422

8781013KT applied to 14220303 14220404, 14220503 14220504, 14225503 14225504, 14225505 14225506, 14226504 14226506, 14220806 14220807,14220808
8781032KT applied to 14220806, 14220807 14220808

Extra long shank screwdriver

⊕ PHILLIPS head

KING TONY	⊕ No.	Shank Dia x Length (mm)	Shank Dia x Length (inch)	g	
14210112	1	4.5 x 300	3/16 x 12	80	12 / 96
14210212	2	6.0 x 300	1/4 x 12	127	12 / 96
14210116	1	4.5 x 400	3/16 x 16	93	12 / 96
14210216	2	6.0 x 400	1/4 x 16	150	12 / 96

1421xx12
1421xx16

⊖ SLOTTED head

KING TONY	Tip Width x Shank Length (mm)	Tip Thickness x Shank Diameter (mm)	Tip Width x Shank Length (inch)	g	
14220512	5.0 x 300	0.8 x 5	3/16 x 12	105	12 / 96
14226512	6.5 x 300	1.2 x 6	1/4 x 12	127	12 / 96
14220516	5.0 x 400	0.8 x 5	3/16 x 16	121	12 / 96
14226516	6.5 x 400	1.2 x 6	1/4 x 16	150	12 / 96

1422xx12
1422xx16

Standard Screwdriver

- SHANK MATERIAL - SNCM + V alloy steel
- GRIP MATERIAL - PP + TPR
- FINISHING - chrome plated with black tip

1423

- For TORX head screws, round shank.

KING TONY	Size	Shank Dia x Length (mm)	Shank Dia x Length (inch)	g	
14230803	T8	3.2 x 75	5/32 x 3	49	12 / 144
14230903	T9	3.2 x 75	5/32 x 3	49	12 / 144
14231003	T10	3.2 x 75	5/32 x 3	49	12 / 144
14231503	T15	4 x 75	3/16 x 3	55	12 / 144
14232004	T20	5 x 100	3/16 x 4	53	12 / 144
14232504	T25	6 x 100	1/4 x 4	83	12 / 144
14232704	T27	6 x 100	1/4 x 4	83	12 / 144
14233005	T30	6 x 125	1/4 x 5	89	12 / 144
14234006	T40	8 x 150	5/16 x 6	142	12 / 144

1423

8781013KT applied to 14230803, 14230903 14231003, 14231503, 14232004 14232504, 14232704, 14233005
8781032KT applied to 14234006

1424

- SQUARE head
- Metric size

KING TONY	No.	Shank Dia x Length (mm)	g	
14240105	1	5 x 125	64	20 / 240
14240204	2	6 x 100	87	12 / 144
14240206	2	6 x 150	102	12 / 144

1424

1427

- For TORX head screws, round shank.
- Tamper resistant type

KING TONY	Size	Shank Dia x Length (mm)	Shank Dia x Length (inch)	g	
14270803	T8	3.2 x 75	1/8 x 3	49	12 / 144
14270903	T9	3.2 x 75	1/8 x 3	49	12 / 144
14271003	T10	3.2 x 75	1/8 x 3	49	12 / 144
14271503	T15	4 x 75	5/32 x 3	55	12 / 144
14272004	T20	5 x 100	3/16 x 4	53	12 / 144
14272504	T25	5 x 100	3/16 x 4	83	12 / 144
14272704	T27	6 x 100	1/4 x 4	83	12 / 144
14273005	T30	6 x 125	1/4 x 5	89	12 / 144
14274006	T40	8 x 150	5/16 x 6	142	12 / 144

1427

8781013KT applied to14270803, 14270903 14271003, 14271503, 14272004 14272504, 14272704, 14273005
8781032KT applied to 14274006

1428

- POZIDRIV head, round shank.
  Metric size-DIN ISO 8764

KING TONY	No.	Shank Dia x Length (mm)	Shank Dia x Length (inch)	g	
14280023	0	3.2 x 60	1/8 x 2-3/8	35	12 / 96
14280132	1	4.5 x 80	3/16 x 3-1/8	43	12 / 96
14280104	1	4.5 x 100	3/16 x 4	52	12 / 96
14280204	2	6.0 x 100	1/4 x 4	74	12 / 96
14280306	3	8.0 x 150	5/16 x 6	132	12 / 144

1428

8781032KT applied to 14280023, 14280132 14280104, 14280204
8781032KT applied to 14280306

Standard Screwdriver Set

- SHANK MATERIAL - SNCM + V alloy steel
- GRIP MATERIAL - PP + TPR
- FINISHING - chrome plated with black tip

Screwdriver sets:

KING TONY	PC. / SET	Contents	kg	
30115MR	5	1421 ⊕ No.1 x 80 No.2 x 100 1422 ⊖ 4 x 100 5.5 x 125 6.5 x 150	0.54	20
30117MR	7	1421 ⊕ No.1 x 80 No.2 x 100 1422 ⊖ 3 x 75 4 x 100 5.5 x 125 6.5 x 150 8 x 175	0.72	20
30118MR	8	1422 ⊖ 3 x 75 5 x 75 5 x 100 8 x 150 8 x 200 6.5 x 100 6.5 x 150 6.5 x 38	0.87	20
31116MR	6	1421 ⊕ No.0 x 60 No.1 x 80 No.2 x 100 1422 ⊖ 3 x 75 5.5 x 100 6.5 x 150	0.56	20
31216MR	6	1421 ⊕ No.1 x 80 No.2 x 100 1422 ⊖ 5 x 75 5 x 100 6.5 x 100 6.5 x 150	0.56	20
30127MR	7	1428 ✳ No.1 x 80 No.2 x 100 No.3 x 150 1422 ⊖ 4 x 100 5.5 x 125 6.5 x 150 8 x 175	0.82	20
30307PR	7	1427 ✿ T10 T15 T20 T25 T27 T30 T40	0.78	20
30309PR	9	1427 ✿ T8 T9 T10 T15 T20 T25 T27 T30 T40	0.88	20
30317PR	7	1423 ✿ T10 T15 T20 T25 T27 T30 T40	0.78	20
30319PR	9	1423 ✿ T8 T9 T10 T15 T20 T25 T27 T30 T40	0.88	20

30115MR

30117MR

30118MR

31116MR

31216MR

30127MR

30307PR

30309PR

30317PR

30319PR

Heavy Duty Screwdriver

- SHANK MATERIAL - CR - V alloy steel
- GRIP MATERIAL - PVC
- FINISHING - chrome plated
  It is used in the working environment less than 60° C

⊕ 1481

- PHILLIPS head, hex-shank
  Metric size-DIN 5261

KING TONY	No.	Shank Dia x Length (mm)	Shank Dia x Length (inch)	g	
14810103	1	5.0 x 75	7/32 x 3	70	12 / 240
14810204	2	6.0 x 100	1/4 x 4	90	12 / 144
14810204-E*	2	6.0 x 100	1/4 x 4	130	12 / 96
14810205	2	6.0 x 125	1/4 x 5	115	12 / 144
14810205-E*	2	6.0 x 125	1/4 x 5	170	12 / 144
14810306	3	8.0 x 150	5/16 x 6	206	12 / 144
14810412	4	10.0 x 300	12/32 x 12	362	10 / 40

* : Enlarged handle

1481

8781013KT applied to 14810103, 14810204 14810205

8781032KT applied to 14810204-E* 14810306, 14810412, 14810205-E*

⊖ 1482

- SLOTTED head, hex-shank
- Metric size-DIN 5263

KING TONY	Tip Width x Shank Length (mm)	Tip Thickness x Shank Diameter (mm)	Tip Width x Shank Length (inch)	g	
14825503	5.5 x 75	0.8 x 5.0	7/32 x 3	70	12 / 240
14826504	6.5 x 100	1.2 x 6.0	1/4 x 4	90	12 / 144
14826504-E*	6.5 x 100	1.2 x 6.0	1/4 x 4	130	12 / 96
14826505-E*	6.5 x 125	1.2 x 6.0	1/4 x 5	170	12 / 144
14826506	6.5 x 150	1.2 x 6.0	1/4 x 6	120	12 / 144
14820806	8.0 x 150	1.2 x 8.0	5/16 x 6	185	12 / 144
14821012	10.0 x 300	1.6 x 10.0	12/32 x 12	337	10 / 40

* : Enlarged handle

1482

8781013KT applied to 14825503, 14826504

8781032KT applied to 114826504-E* 14826505,14826505-E* 14820806, 14821012

Heavy Duty Screwdriver Set

⊖⊕ 35114 MR

- 14 PC. standard & insulated screwdriver set

KING TONY	Contents	g	
35114MR	1411 ⊕ No.0 x 75 No.1 x 100 No.2 x 100 No.2 x 150 No.2 x 38 No.3 x 150 1412 ⊖ 3 x 75 4 x 100 5.5 x 100 6.5 x 150 6.5 x 38 8 x 200 1472 ⊖ 6.5 x 150 1482 ⊖ 10 x 300	2200	4

Heavy Duty Screwdriver

- SHANK MATERIAL - SNCM + V alloy steel
- GRIP MATERIAL - PP + TPR
- FINISHING - chrome plated with black tips

⊕ 1461

- PHILLIPS head, hex-shank
  Metric size-DIN ISO 8764

KING TONY	⊕ No.	Shank Dia x Length (mm)	Shank Dia x Length (inch)	g	
14610103	1	5.0 x 75	7/32 x 3	110	12 / 96
14610204	2	6.0 x 100	1/4 x 4	125	12 / 96
14610306	3	8.0 x 150	5/16 x 6	206	12 / 144

1461

8781013KT applied to 14610306, 14620807

⊖ 1462

- SLOTTED head, hex-shank
- Metric size-DIN ISO 2380

KING TONY	Tip Width x Shank Length (mm)	Tip Thickness x Shank Diameter (mm)	Tip Width x Shank Length (inch)	g	
14625504	5.5 x 100	1.0 x 5.0	7/32 x 4	113	12 / 96
14626504	6.5 x 100	1.2 x 6.0	1/4 x 4	132	12 / 96
14626506	6.5 x 150	1.2 x 6.0	1/4 x 6	155	12 / 144
14620806	8.0 x 150	1.2 x 8.0	5/16 x 6	219	12 / 144
14620807	8.0 x 175	1.2 x 8.0	5/16 x 7	216	12 / 144

1462

8781032KT applied to 14610103 ,14610204
14625504, 14626504, 14626506

Heavy Duty Screwdriver Set

⊖⊕ 30206 MR

- 6 PC. screwdriver sets:

KING TONY	PC. / SET	Pack	Contents	g	
30206MR	6	Color Box	⊕ No.1 x 75 No.2 x 100 No.3 x 150 ⊖ 5.5 x 100 6.5 x 150 8.0 x 175	1200	1 / 20

30206MR

Nutspinner

- SHANK MATERIAL - chrome vanadium alloy steel
- GRIP MATERIAL - PP + TPR
- Shank finishing - chrome plated
  Shank length - 125mm

1450

KING TONY	SIZE (mm)	L1	L2	L	g	
1450 - 04	4.0	4.5	125	223	70	12 / 144
1450 - 45	4.5	4.5	125	223	65	12 / 144
1450 - 05	5.0	5.0	125	223	75	12 / 144
1450 - 55	5.5	5.0	125	223	75	12 / 144
1450 - 06	6.0	6.0	125	223	75	12 / 144
1450 - 07	7.0	6.0	125	223	75	12 / 144
1450 - 08	8.0	7.0	125	235	100	12 / 144
1450 - 09	9.0	7.0	125	235	105	12 / 144
1450 - 10	10.0	8.0	125	235	105	12 / 144
1450 - 11	11.0	9.0	125	245	160	12 / 144
1450 - 12	12.0	10.0	125	245	160	12 / 144
1450 - 13	13.0	10.0	125	245	160	10 / 120

1450



Power Bit

- Bits for screwdriver handle 91232
- Material - SNCM + V alloy steel

1317

KING TONY	No.		Total Lentgh (mm)	Total Lentgh (inch)	g	
1317012PN	⊕ PH1	⊕ PH2	175	7	45	40 / 400
1317012ZN	⊛ PZ2	⊛ PZ1	175	7	45	40 / 400
1317046SN	⊖ 4.0	⊖ 6.0	175	7	45	40 / 400
1317057SN	⊖ 5.0	⊖ 7.0	175	7	45	40 / 400
1317115TN	✱ T10	✱ T15	175	7	45	40 / 400
1317225TN	✱ T20	✱ T25	175	7	45	40 / 400
1317340TN	✱ T30	✱ T40	175	7	45	40 / 400
1317401PN	⊖ 4.0	⊕ PH1	175	7	45	40 / 400
131744BHN	◉ 4.0	◉ 4.0	175	7	45	40 / 400
1317501ZN	⊖ 5.0	⊛ PZ1	175	7	45	40 / 400
131755BHN	◉ 5.0	◉ 5.0	175	7	45	40 / 400
1317602PN	⊖ 6.0	⊕ PH2	175	7	45	40 / 400
131766BHN	◉ 6.0	◉ 6.0	175	7	45	40 / 400
1317702ZN	⊖ 7.0	⊛ PZ2	175	7	45	40 / 400

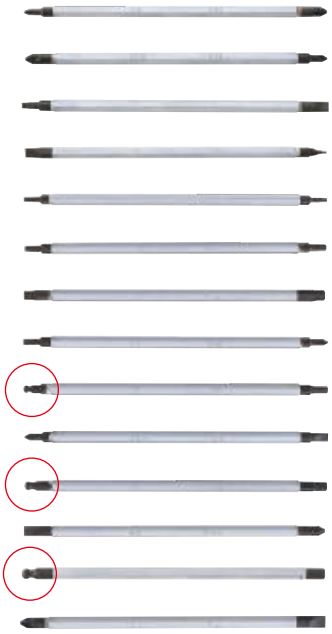

Screwdriver Handle

91232

KING TONY	Total Length (mm)	Total Length (inch)	g	
91232	135	5-1/4	84	-

91232

Screwdriver Set

32518 MR

- 11 PC. two-way screwdriver set

KING TONY	Contents			
32518MR	1317012PN	PH1	PH2	
	1317012ZN	PZ2	PZ1	
	1317046SN	4.0	6.0	
	1317057SN	5.0	7.0	
	1317115TN	T10	T15	
	1317225TN	T20	T25	
	1317340TN	T30	T40	
	131744BHN	4.0	4.0	
	131755BHN	5.0	5.0	
	131766BHN	6.0	6.0	
	91232			

32518MR

kg		Blow case size (mm)
0.7	20	233 x 120 x 43 (0.07 cuft)

32518 MR01

- 11PC. two-way screwdriver set

KING TONY	Contents			
32518MR01	1317115TN	T10	T15	
	1317225TN	T20	T25	
	1317340TN	T30	T40	
	1317401PN	4.0	PH1	
	131744BHN	4.0	4.0	
	1317501ZN	5.0	PZ1	
	131755BHN	5.0	5.0	
	1317602PN	6.0	PH2	
	131766BHN	6.0	6.0	
	1317702ZN	7.0	PZ2	
	91232			

32518MR01

kg		Blow case size (mm)
0.7	20	233 x 120 x 43 (0.07 cuft)

32518 MR02

- 11 PC. two-way screwdriver set

KING TONY	Contents			
32518MR02	1317115TN	T10	T15	
	1317225TN	T20	T25	
	1317340TN	T30	T40	
	1317401PN	4.0	PH1	
	131744BHN	4.0	4.0	
	1317012PN	PH1	PH2	
	131755BHN	5.0	5.0	
	1317602PN	6.0	PH2	
	131766BHN	6.0	6.0	
	1317057SN	5.0	7.0	
	91232			

32518MR02

kg		Blow case size (mm)
0.7	20	233 x 120 x 43 (0.07 cuft)

Insulated Screwdriver

- SHANK MATERIAL - SNCM + V alloy steel
- GRIP MATERIAL - PP + TPR
- FINISHING - chrome plated with black tip

⊕ 1471

- PHILLIPS head, round shank.
- Metric size-IEC 60900:2004

KING TONY	No.	Shank Dia x Length (mm)	Shank Dia x Length (inch)	g	
14710003	0	3.0 x 75	1/8 x 3	37	12 / 144
14710104	1	4.5 x 100	3/16 x 4	54	12 / 216
14710204	2	6.0 x 100	1/4 x 4	77	12 / 144
14710306	3	8.0 x 150	5/16 x 6	135	12 / 144

1471

⊖ 1472

- SLOTTED head, round shank.
- Metric size-IEC 60900:2004

KING TONY	Tip Width x Shank Length (mm)	Tip Thickness x Shank Diameter (mm)	Tip Width x Shank Length (inch)	g	
14720303	3.0 x 75	0.5 x 3.0	1/8 x 3	38	12 / 144
14720404	4.0 x 100	0.8 x 4.0	3/16 x 4	44	12 / 96
14725505	5.5 x 125	1.0 x 5.5	7/32 x 5	72	12 / 144
14726506	6.5 x 150	1.2 x 6.5	1/4 x 6	87	12 / 144
14720807	8.0 x 175	1.2 x 8.0	5/16 x 8	143	12 / 144

1472

⊛ 1478

- POZIDRIV head, round shank.
- Metric size-IEC 60900:2004

KING TONY	No.	Shank Dia x Length (mm)	Shank Dia x Length (inch)	g	
14780003	0	3.0 x 75	1/8 x 3	37	12 / 144
14780104	1	4.5 x 100	3/16 x 4	54	12 / 96
14780204	2	6.0 x 100	1/4 x 4	77	12 / 144
14780306	3	8.0 x 150	5/16 x 6	135	12 / 144

1478

Insulated Screwdriver Set

⊛⊖30607 MR ⊕⊖30617 MR

packing:

KING TONY	PC. / SET	Contents	kg	
30607MR	7	⊛ No.1 x 100 No.2 x 100 No.3 x 150 ⊖ 4 x 100 5.5 x 125 6.5 x 150 8.0 x 175	0.86	20
30617MR	7	⊕ No.1 x 100 No.2 x 100 No.3 x 150 ⊖ 4 x 100 5.5 x 125 6.5 x 150 8.0 x 175	0.86	20

30607MR

30617MR

Precision Screwdriver

- SHANK MATERIAL - SNCM + V alloy steel
- GRIP MATERIAL - PP + TPR
- FINISHING - chrome plated with black tip

1431

- PHILLIPS head, round shank.
- Metric size-DIN 5261

KING TONY	No.	Shank Dia x Length (mm)	g	
14313015	No.000	2.0 x 40	7	10 / 320
14312015	No.00	2.5 x 40	7	10 / 320
14311015	No.0	3.0 x 40	13	10 / 100
14311115	No.1	4.0 x 40	16	10 / 100
14313003	No.000	2.0 x 75	8	10 / 320
14312003	No.00	2.5 x 75	8	10 / 320
14311003	No.0	3.0 x 75	14	10 / 100
14311103	No.1	4.0 x 75	18	10 / 100

1431

1432

- SLOTTED head, round shank.
- Metric size-DIN 5263

KING TONY	Tip Width x Shank Length (mm)	Tip Thickness x Shank Diameter (mm)	g	
14320615	0.6 x 40	0.15 x 0.6	9	10 / 320
14320815	0.8 x 40	0.20 x 0.8	9	10 / 320
14321015	1.0 x 40	0.20 x 1.0	9	10 / 320
14321515	1.5 x 40	0.25 x 1.5	10	10 / 320
14321815	1.8 x 40	0.27 x 1.8	10	10 / 320
14322015	2.0 x 40	0.30 x 2.0	11	10 / 100
14322515	2.5 x 40	0.40 x 2.5	12	10 / 100
14323015	3.0 x 40	0.50 x 3.0	13	10 / 100
14323515	3.5 x 40	0.55 x 3.5	14	10 / 100
14324015	4.0 x 40	0.60 x 4.0	16	10 / 100
14321003	1.0 x 75	0.20 x 1.0	11	10 / 320
14321503	1.5 x 75	0.25 x 1.5	11	10 / 320
14321803	1.8 x 75	0.27 x 1.8	11	10 / 320
14322003	2.0 x 75	0.30 x 2.0	11	10 / 100
14322503	2.5 x 75	0.40 x 2.5	13	10 / 100
14323003	3.0 x 75	0.50 x 3.0	15	10 / 100
14323503	3.5 x 75	0.55 x 3.5	16	10 / 100
14324003	4.0 x 75	0.60 x 4.0	18	10 / 100

1432

1433

- For TORX head, round shank.

KING TONY	No.	Shank Dia x Length (mm)	g	
14330415	T4	3 X 40	10	10 / 320
14330515	T5	3 X 40	10	10 / 320
14330615	T6	3 X 40	10	10 / 320
14330715	T7	3 X 40	10	10 / 320
14330815	T8	3 X 40	10	10 / 320
14330902	T9	4 X 50	16	10 / 100
14331002	T10	4 X 50	16	10 / 100
14331502	T15	4 X 50	16	10 / 100
14332002	T20	4 X 50	16	10 / 100
14330403	T4	3 X 75	11	10 / 320
14330503	T5	3 X 75	11	10 / 320
14330603	T6	3 X 75	11	10 / 320
14330703	T7	3 X 75	11	10 / 320
14330803	T8	3 X 75	11	10 / 320
14330903	T9	4 X 75	18	10 / 100
14331003	T10	4 X 75	18	10 / 100
14331503	T15	4 X 75	18	10 / 100
14332003	T20	4 X 75	18	10 / 100

1433

Precision Screwdriver

91230

Screwdriver handle for interchangeable blades 2431, 2433
Handle material - polypropylene (PP)

KING TONY	Total Length (mm)	Total Length (inch)	g	
91230	100	4-1/2	12	10 / 100

91230

2431

Screwdriver blade for combination type
Phillips / Slotted head, hexagonal shank
Blade material - SNCM + V alloy steel
Finishing - chrome plated with black tip

KING TONY	No.	Tip Width (mm)	Tip Thickness (mm)	Shank Diameter (mm)	Total Length (mm)	g	
24312020	PH00	2.0	0.30	4	120	11	20 / 200
24311030	PH0	3.0	0.50	4	120	11	20 / 200
24311140	PH1	4.0	0.60	4	120	11	20 / 200

2431

2433

Screwdriver blade for combination type
Phillips / Slotted head, hexagonal shank
Blade material - SNCM + V alloy steel
Finishing - chrome plated with black tip

KING TONY	SIZE	Shank Diameter (mm)	Total Length (mm)	g	
24330610	T6 x T10	4	120	11	20 / 200
24330715	T7 x T15	4	120	11	20 / 200
24330820	T8 x T20	4	120	11	20 / 200
24330915	T9 x T15	4	120	11	20 / 200

2433

Precision Screwdriver Set

⊕⊖ 32108 MR ⊕⊖ 32118 MR
⊖ 32209 MR ⊖ 32218 MR
32309 PR ⊕⊖ 32607 MR

KING TONY	PC. / SET	Contents	kg	
32108MR	8	⊕ No.000 x 40 No.00 x 40 No.0 x 40 No.1 x 40 ⊖ 1.5 x 40 2.0 x 40 2.5 x 40 3.0 x 40	0.24	30
32118MR	8	⊕ No.000 x 75 No.00 x 75 No.0 x 75 No.1 x 75 ⊖ 1.5 x 75 2.0 x 75 2.5 x 75 3.0 x 75	0.32	
32209MR	9	⊖ 0.8 x 40 1.0 x 40 1.5 x 40 1.8 x 40 2.0 x 40 2.5 x 40 3.0 x 40 3.5 x 40 4.0 x 40	0.26	
32218MR	8	⊖ 1.0 x 75 1.5 x 75 1.8 x 75 2.0 x 75 2.5 x 75 3.0 x 75 3.5 x 75 4.0 x 75	0.32	
32309PR	9	T4 x 40 T5 x 40 T6 x 40 T7 x 40 T8 x 40 T9 x 50 T10 x 50 T15 x 50 T20 x 50	0.26	
32607MR	8	91230 ⊕⊖ PH00 x 2.0 PH0 x 3.0 PH1 x 4.0 T6 x T10 T7 x T15 T8 x T20 T9 x T15	0.22	

32108MR

32209MR

32118MR

32309PR

32218MR

32607MR

⊕⊖ 31419 MR

- 114 PC. precision screwdriver shelf set (40L)

KING TONY		Contents	Each Q' ty
31419MR	1431 ⊕	No.000 x 40 No.00 x 40 No.0 x 40	6
		No.1 x 40	6
	1432 ⊖	0.6 x 40 0.8 x 40 1.0 x 40 1.5 x 40	6
		1.8 x 40 2.0 x 40 2.5 x 40 3.0 x 40	6
		3.5 x 40 4.0 x 40	6
	1433	T4 x 40 T5 x 40 T6 x 40 T7 x 40	6
		T8 x 40	6

31419MR

kg		Metal case size (mm)
1.1	0.63	383x136x130

Bit

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted.
- Total length : 25 mm

1/4" *Hex size shank driver*

order unit :one box

Item No.xxxxxxx.B

⊕ 1025P

- PHILLIPS head
- DIN 3128

KING TONY	No.	g		
102500P (102500P.B)	0	4.5	20 / 200	(50 / 1000)
102501P (102501P.B)	1	5.0	20 / 200	(50 / 1000)
102502P (102502P.B)	2	5.5	20 / 200	(50 / 1000)
102503P (102503P.B)	3	6.0	20 / 200	(50 / 1000)

⊕ 102512P

- PHILLIPS head
- Reduced for dry-wall
- DIN 3128

KING TONY	No.	g		
102512P (102512P.B)	2	5.5	20 / 200	(50 / 1000)

Bit

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted.
- Total length : 25 mm

1/4" *Hex size shank driver*

order unit :one box

Item No.xxxxxxx.B

1025S

- SLOTTED head
- DIN 3127

KING TONY	Tip width (mm)	Tip thickness (mm)	g	/
102503S1 (102503S1.B)	3.0	0.5	4.5	20 / 200 (50 / 1000)
102535S1 (102535S1.B)	3.5	0.6	4.5	20 / 200 (50 / 1000)
102504S1 (102504S1.B)	4.0	0.5	4.5	20 / 200 (50 / 1000)
102504S2 (102504S2.B)	4.0	0.8	5.0	20 / 200 (50 / 1000)
102545S1 (102545S1.B)	4.5	0.6	5.0	20 / 200 (50 / 1000)
102505S1 (102505S1.B)	5.0	0.8	5.0	20 / 200 (50 / 1000)
102555S1 (102555S1.B)	5.5	0.8	5.0	20 / 200 (50 / 1000)
102555S2 (102555S2.B)	5.5	1.0	5.0	20 / 200 (50 / 1000)
102506S1 (102506S1.B)	6.0	1.0	5.0	20 / 200 (50 / 1000)
102565S1 (102565S1.B)	6.5	1.2	5.5	20 / 200 (50 / 1000)
102507S1 (102507S1.B)	7.0	1.2	5.5	20 / 200 (50 / 1000)
102508S1 (102508S1.B)	8.0	1.2	6.0	20 / 200 (50 / 1000)
102508S2 (102508S2.B)	8.0	1.6	6.0	20 / 200 (50 / 1000)

1025T

- For TORX INTERNAL screws

KING TONY	SIZE	g	/
102506T (102506T.B)	T6	4.5	20 / 200 (50 / 1000)
102507T (102507T.B)	T7	4.5	20 / 200 (50 / 1000)
102508T (102508T.B)	T8	4.5	20 / 200 (50 / 1000)
102509T (102509T.B)	T9	4.5	20 / 200 (50 / 1000)
102510T (102510T.B)	T10	4.5	20 / 200 (50 / 1000)
102515T (102515T.B)	T15	5.0	20 / 200 (50 / 1000)
102520T (102520T.B)	T20	5.0	20 / 200 (50 / 1000)
102525T (102525T.B)	T25	5.0	20 / 200 (50 / 1000)
102527T (102527T.B)	T27	5.0	20 / 200 (50 / 1000)
102530T (102530T.B)	T30	5.0	20 / 200 (50 / 1000)
102540T (102540T.B)	T40	6.0	20 / 200 (50 / 1000)

1025Z

- POZIDRIV type
- DIN 3128

KING TONY	No.	g	/
102501Z (102501Z.B)	1	5.0	20 / 200 (50 / 1000)
102502Z (102502Z.B)	2	5.5	20 / 200 (50 / 1000)
102503Z (102503Z.B)	3	5.5	20 / 200 (50 / 1000)

1025R

- SQUARE head

KING TONY	SIZE No.	g	/
102500R (102500R.B)	0	4.5	20 / 200 (50 / 1000)
102501R (102501R.B)	1	5.0	20 / 200 (50 / 1000)
102502R (102502R.B)	2	5.0	20 / 200 (50 / 1000)
102503R (102503R.B)	3	5.5	20 / 200 (50 / 1000)

1025H
5025H

- HEXAGON head
- DIN 7426

KING TONY	mm / inch	g	/
102515H (102515H.B)	1.5	4.0	20 / 200 (50 / 1000)
102502H (102502H.B)	2.0	4.5	20 / 200 (50 / 1000)
102525H (102525H.B)	2.5	4.5	20 / 200 (50 / 1000)
102503H (102503H.B)	3.0	5.0	20 / 200 (50 / 1000)
102504H (102504H.B)	4.0	5.5	20 / 200 (50 / 1000)
102505H (102505H.B)	5.0	6.0	20 / 200 (50 / 1000)
102506H (102506H.B)	6.0	6.0	20 / 200 (50 / 1000)
102507H (102507H.B)	7.0	7.5	20 / 200 (50 / 1000)
102508H (102508H.B)	8.0	9.0	20 / 200 (50 / 1000)
102510H (102510H.B)	10.0	11.5	20 / 200 (50 / 1000)
502503H (502503H.B)	3/64	4.0	20 / 200 (50 / 1000)
502504H (502504H.B)	1/16	4.0	20 / 200 (50 / 1000)
502505H (502505H.B)	5/64	4.5	20 / 200 (50 / 1000)
502506H (502506H.B)	3/32	5.0	20 / 200 (50 / 1000)
502507H (502507H.B)	7/64	5.0	20 / 200 (50 / 1000)
502508H (502508H.B)	1/8	5.0	20 / 200 (50 / 1000)
502509H (502509H.B)	9/64	5.0	20 / 200 (50 / 1000)
502510H (502510H.B)	5/32	5.5	20 / 200 (50 / 1000)

1025U

- For TORX head screws
- **Tamper resistant type**

KING TONY	SIZE	g	/
102507U (102507U.B)	T7	4.0	20 / 200 (50 / 1000)
102508U (102508U.B)	T8	4.5	20 / 200 (50 / 1000)
102509U (102509U.B)	T9	4.5	20 / 200 (50 / 1000)
102510U (102510U.B)	T10	4.5	20 / 200 (50 / 1000)
102515U (102515U.B)	T15	4.5	20 / 200 (50 / 1000)
102520U (102520U.B)	T20	5.0	20 / 200 (50 / 1000)
102525U (102525U.B)	T25	5.0	20 / 200 (50 / 1000)
102527U (102527U.B)	T27	5.0	20 / 200 (50 / 1000)
102530U (102530U.B)	T30	5.5	20 / 200 (50 / 1000)
102540U (102540U.B)	T40	5.5	20 / 200 (50 / 1000)

1025V NEW

- For inside 5-star screws
- **Tamper resistant type**

KING TONY	SIZE	g	/
102508V	IPR 8	5.0	20 / 200
102509V	IPR 9	5.0	20 / 200
102510V	IPR 10	5.0	20 / 200
102515V	IPR 15	5.0	20 / 200
102520V	IPR 20	5.0	20 / 200
102525V	IPR 25	5.0	20 / 200
102527V	IPR 27	5.0	20 / 200
102530V	IPR 30	5.0	20 / 200
102540V	IPR 40	6.4	20 / 200

Bits

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted.

order unit :one box

1/4" *Hex size shank driver*

1360ZZ

- Double POZIDRIV head

KING TONY	No.	Total Length (mm)	g	
1360012Z	1 / 2	60	13.0	10 / 100
1360022Z	2 / 2	60	13.5	10 / 100
1360023Z	2 / 3	60	13.5	10 / 100

1360PP

- Double PHILLIPS head

KING TONY	No.	Total Length (mm)	g	
1360012P	1 / 2	60	13.0	10 / 100
1360022P	2 / 2	60	13.5	10 / 100
1360023P	2 / 3	60	13.5	10 / 100

5/16" *Hex size shank driver*

order unit :one box

1800P

- PHILLIPS head. 36 / 80mm L
- DIN 3128

KING TONY	No.	Total Length (mm)	g	
183602P	2	36	12	20 / 200
188002P	2	80	31	10 / 100
181202P	2	125	50	10 / 100
183603P	3	36	12	20 / 200
188003P	3	80	31	10 / 100
181203P	3	125	50	10 / 100
183604P	4	36	12	20 / 200
188004P	4	80	31	10 / 100

1800S

- SLOTTED head. 36 / 80mm L
- DIN 3127

KING TONY	Tip width (mm)	Tip thickness (mm)	Total Length (mm)	g	
183608S	8	1.2	36	11.5	20 / 200
188008S	8	1.2	80	32.0	10 / 100
183609S	9	1.6	36	13.0	20 / 200
183610S	10	1.6	36	14.5	20 / 200
188010S	10	1.6	80	33.0	10 / 100
183611S	11	2.0	36	16.0	20 / 200
183612S	12	2.0	36	17.5	12 / 120
188012S	12	2.0	80	34.0	6 / 60

1360ZS

- POZIDRIV / SLOTTED head

KING TONY	No.	Tip width (mm)	Tip thickness (mm)	Total Length (mm)	g	
1360451Z	1	4.5	0.6	60	13.0	10 / 100
1360552Z	2	5.5	1.0	60	13.5	10 / 100
1360703Z	3	7.0	1.2	60	13.5	10 / 100

1360PS

- PHILLIPS / SLOTTED head

KING TONY	No.	Tip width (mm)	Tip thickness (mm)	Total Length (mm)	g	
1360451P	1	4.5	0.6	60	13.0	10 / 100
1360552P	2	5.5	1.0	60	13.5	10 / 100
1360703P	3	7.0	1.2	60	13.5	10 / 100

1800T

- For TORX INTERNAL screws. 32 / 70 mm L

KING TONY	SIZE	Total Length (mm)	g	
183215T	T15	32	10.0	20 / 200
187015T	T15	70	22.0	10 / 100
183220T	T20	32	10.0	20 / 200
187020T	T20	70	22.0	10 / 100
183225T	T25	32	10.0	20 / 200
187025T	T25	70	22.0	10 / 100
183227T	T27	32	10.5	20 / 200
187027T	T27	70	22.0	10 / 100
183230T	T30	32	10.5	20 / 200
187030T	T30	70	22.0	10 / 100
183240T	T40	32	10.0	20 / 200
187040T	T40	70	22.5	10 / 100
183245T	T45	32	10.5	20 / 200
187045T	T45	70	22.0	10 / 100
183250T	T50	32	10.5	20 / 200
187050T	T50	70	22.0	10 / 100

Bits

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

10mm *Hex size shank driver*

order unit :one box

1600T

- For TORX head, 36/80mmL

KING TONY	(mm)	Overall Length (mm)	g	
163610T	T10	36	16.9	12 / 120
168010T	T10	80	46.3	6 / 60
163615T	T15	36	17.3	12 / 120
168015T	T15	80	46.5	6 / 60
163620T	T20	36	17.6	12 / 120
168020T	T20	80	46.8	6 / 60
163625T	T25	36	17.8	12 / 120
168025T	T25	80	47.1	6 / 60
163627T	T27	36	18.2	12 / 120
168027T	T27	80	47.2	6 / 60
163630T	T30	36	18.3	12 / 120
168030T	T30	80	47.2	6 / 60
163640T	T40	36	19.9	12 / 120
168040T	T40	80	48.0	6 / 60
163645T	T45	36	20.9	12 / 120
168045T	T45	80	49.1	6 / 60
163650T	T50	36	22.9	12 / 120
168050T	T50	80	50.0	6 / 60
163655T	T55	36	28.0	12 / 120
168055T	T55	80	52.3	6 / 60
163660T	T60	36	32.6	12 / 120
168060T	T60	80	70.4	6 / 60

1600H

- HEXAGON head, 36/80mmL

KING TONY	(mm)	Overall Length (mm)	g	
163604H	4	36	17.3	12 / 120
168004H	4	80	47.2	6 / 60
163605H	5	36	18.6	12 / 120
168005H	5	80	48.0	6 / 60
163606H	6	36	19.2	12 / 120
168006H	6	80	49.4	6 / 60
163607H	7	36	20.1	12 / 120
168007H	7	80	50.3	6 / 60
163608H	8	36	21.3	12 / 120
168008H	8	80	50.8	6 / 60
163610H	10	36	24.1	12 / 120
168010H	10	80	53.8	6 / 60
163612H	12	36	30.5	12 / 120
168012H	12	80	72.9	6 / 60

1600M

- SPLINE head, 36/80mmL

KING TONY	(mm)	Overall Length (mm)	g	
163605M	5	36	18.3	12 / 120
168005M	5	80	47.2	6 / 60
163606M	6	36	18.7	12 / 120
168006M	6	80	47.9	6 / 60
163608M	8	36	19.8	12 / 120
168008M	8	80	49.0	6 / 60
163610M	10	36	22.4	12 / 120
168010M	10	80	51.6	6 / 60
163612M	12	36	27.7	12 / 120
168012M	12	80	70.1	6 / 60

1600U

- For TORX head, 36/80mmL
- Tamper resistant type

KING TONY	(mm)	Overall Length (mm)	g	
163610U	T10	36	16.9	12 / 120
168010U	T10	80	46.3	6 / 60
163615U	T15	36	17.3	12 / 120
168015U	T15	80	46.5	6 / 60
163620U	T20	36	17.6	12 / 120
168020U	T20	80	46.8	6 / 60
163625U	T25	36	17.8	12 / 120
168025U	T25	80	47.1	6 / 60
163627U	T27	36	18.2	12 / 120
168027U	T27	80	47.2	6 / 60
163630U	T30	36	18.3	12 / 120
168030U	T30	80	47.2	6 / 60
163640U	T40	36	19.9	12 / 120
168040U	T40	80	48.0	6 / 60
163645U	T45	36	20.9	12 / 120
168045U	T45	80	49.1	6 / 60
163650U	T50	36	22.9	12 / 120
168050U	T50	80	50.0	6 / 60
163655U	T55	36	28.0	12 / 120
168055U	T55	80	52.3	6 / 60
163660U	T60	36	32.6	12 / 120
168060U	T60	80	70.4	6 / 60

Bit Set

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted.

1011MQ

- 11 PC. bit set

KING TONY	Contents	g	/
1011MQ	1636M: 5 6 8 10 12 1680M: 5 6 8 10 12 414810M	815	20

1011MQ

Metal case size (mm)
- 198 x 105 x 37 (0.053 cuft)

1015MQ

- 15 PC. bit set

KING TONY	Contents	g	/
1015MQ	1636H: 4 5 6 7 8 10 12 1680H: 4 5 6 7 8 10 12 414810M	960	20

1015MQ

Metal case size (mm)
- 198 x 105 x 37 (0.053 cuft)

1015PQ

- 15 PC. bit set

KING TONY	Contents	g	/
1015PQ	1636T: T20 T25 T30 T40 T45 T50 T55 1680T: T20 T25 T30 T40 T45 T50 T55 414810M	915	20

1015PQ

Metal case size (mm)
- 198 x 105 x 37 (0.053 cuft)

1044CQ

- 44 PC. bit set

	Contents	
1044CQ	1636M: 5 6 8 10 12 1636H: 4 5 6 7 8 10 12 1636T: T20 T25 T27 T30 T40 T45 T50 T55 T60 1680H: 4 5 6 7 8 10 12 1680T: T20 T25 T27 T30 T40 T45 T50 T55 T60 1680M: 5 6 8 10 12	314810M 414810M

1044CQ

kg	/	Metal case size (mm)
2.5	10	296 x 130 x 41 (0.056 cuft)

10 PC. Interchangeable Ratchet Screwdriver Set

32810MR

- Non magnetic type.
- Handle of TPV+PP
- CONTENTS:
  16 TIPS:
  - 7PC. 1/4"x75 mm
    PH0 x SL 4 mm, PH1 x SL 5 mm, PH2 x SL 6 mm,
    Hex 3 mm x Hex 4 mm, Hex 5 mm x Hex 6 mm,
    Hex 2.0 mm x Hex 2.5 mm, T-10 x T-15
  - 1PC. 5/16"x75 mm
    PH3 x SL 8 mm
  - 1PC. Reversible ratchet
  - 1PC. 1/4" & 5/16" bit holder



KING TONY	Contents	g	
32810MR	H2.5 H2 H4 H3 H6 H5 SL4 PH0 SL5 PH1 SL6 PH2 SL8 PH3 T15 T10	398	9 / 54

Bit Set

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted.

1032CQ

▪ 32 PC. bit set

	Contents	
1032CQ	1025S 3.0 4.0 5.0 6.0	7702-25
	1025P PH1 PH2 x 2 PH3	
	1025Z PZ1 PZ2 x 2 PZ3	
	1025T T10 T15 T20 T25 T27 T30 T40	753-63
	1025H H3 H4 H5 H6	
	1025U T10 T15 T20 T25 T27 T30 T40	

g		Plastic case size (mm)
294	20	120 x 70 x 42 (0.01 cuft)

1050CQ

▪ 50 PC. bit set

	Contents	
1050CQ	1025S 4.0 x 2 5.5 x 2 6.5 x 2	750-60
	1025P PH1 x 2 PH2 x 2 PH3 x 2	
	1025Z PZ1x 2 PZ2 x 2 PZ3 x 2	
	1025T T6 T7 T8 T9 T10 T15 T20 T25 T27 T30 T40 x 2	2141
	1025H H2 H3 H4 H5 H6 H7 H8	
	1025U T7 T8 T9 T10 T15 T20 T25 T27 T30 T40 x 2	

1050CQ

kg		Blow case size (mm)
0.5	20	224 x 110 x 54 (0.047 cuft)

2517MR

▪ 17 PC.Socket & bit set

	Contents	
2517MR	1025S 4.0 5.5 6.5	7702-25
	1025P PH1 PH2 PH3	
	1025T T10 T15 T20	753-63
	2335M 4 4.5 5 5.5 6 7mm	

g		Blow case size (mm)
229	28	120 x 70 x 32 (0.01 cuft)

Power Bit

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted

order unit :one box

1/4" *Hex size shank driver*

⊕ 7100P

- PHILLIPS, short neck (9.5 mm) type
- DIN 3128

KING TONY	No.	Overall Length (mm)	g	
715000P	0	50	8.5	10 / 100
715001P	1	50	9.0	10 / 100
715002P	2	50	11.0	10 / 100
715003P	3	50	11.0	10 / 100
716502P	2	65	15.5	10 / 100
717001P	1	70	16.5	10 / 100
717002P	2	70	17.0	10 / 100
717003P	3	70	17.0	10 / 100
719001P	1	90	18.0	10 / 100
719002P	2	90	20.0	10 / 100
719003P	3	90	20.0	10 / 100
711002P	2	100	24.0	10 / 100
711501P	1	150	23.0	10 / 100
711502P	2	150	33.0	10 / 100
711503P	3	150	33.0	10 / 100

⬢ 7150H

- HEXAGON head
- DIN 7426

KING TONY	(mm)	Overall Length (mm)	g	
715002H	2.0	50	6.0	10 / 100
715025H	2.5	50	6.5	10 / 100
715003H	3.0	50	6.5	10 / 100
715004H	4.0	50	9.5	10 / 100
715005H	5.0	50	10.0	10 / 100
715006H	6.0	50	11.0	10 / 100
715007H	7.0	50	13.0	10 / 100
715008H	8.0	50	17.0	10 / 100

⊖ 7150S

- SLOTTED head
- DIN 3127

KING TONY	Tip width (mm)	Tip thickness (mm)	Overall Length (mm)	g	
715003S1	3.0	0.5	50	6.0	10 / 100
715035S1	3.5	0.5	50	6.5	10 / 100
715004S2	4.0	0.5	50	7.0	10 / 100
715004S1	4.0	0.8	50	7.0	10 / 100
715045S1	4.5	0.6	50	7.0	10 / 100
715005S1	5.0	0.8	50	8.0	10 / 100
715055S1	5.5	0.8	50	8.5	10 / 100
715055S2	5.5	1.0	50	8.5	10 / 100
715006S1	6.0	1.0	50	8.5	10 / 100
715065S1	6.5	1.2	50	9.0	10 / 100

■ 7150R

- SQUARE head

KING TONY	SIZE No.	Overall Length (mm)	g	
715000R	0	50	7.5	10 / 100
715001R	1	50	8.0	10 / 100
715002R	2	50	8.5	10 / 100
715003R	3	50	8.5	10 / 100

✱ 7100T

- For TORX head screws
- 50 / 70 mm L

KING TONY	SIZE No.	Overall Length (mm)	g	
715006T	T6	50	5.0	10 / 100
717006T	T6	70	7.0	10 / 100
715007T	T7	50	5.0	10 / 100
717007T	T7	70	7.0	10 / 100
715008T	T8	50	5.5	10 / 100
717008T	T8	70	7.5	10 / 100
715009T	T9	50	5.5	10 / 100
717009T	T9	70	7.5	10 / 100
715010T	T10	50	6.0	10 / 100
717010T	T10	70	8.0	10 / 100
715015T	T15	50	6.0	10 / 100
717015T	T15	70	8.0	10 / 100
715020T	T20	50	7.5	10 / 100
717020T	T20	70	10.5	10 / 100
715025T	T25	50	8.0	10 / 100
717025T	T25	70	11.0	10 / 100
715027T	T27	50	9.5	10 / 100
717027T	T27	70	14.0	10 / 100
715030T	T30	50	9.5	10 / 100
717030T	T30	70	14.0	10 / 100
715040T	T40	50	10.0	10 / 100
717040T	T40	70	15.5	10 / 100

✳ 7100Z

- POZIDRIV head
- DIN 3128

KING TONY	No.	Overall Length (mm)	g	
715001Z	1	50	9.0	10 / 100
715002Z	2	50	11.0	10 / 100
715003Z	3	50	12.5	10 / 100
717001Z	1	70	11.0	10 / 100
717002Z	2	70	15.5	10 / 100
717003Z	3	70	15.5	10 / 100
719001Z	1	90	13.0	10 / 100
719002Z	2	90	19.5	10 / 100
719003Z	3	90	19.5	10 / 100

Power Bit Set

⬢ 2138PR

- 7 PC. tamper resistant bits & L-type holder set

	Contents	kg	
2138PR	7150H 1589-02 2 3 4 5 6 7 8	235	60

Power Bit

- Silicon chrome vanadium alloy steel (S2)
- Anti-rust oiled, sand-blasted.

5mm *Hex size shank driver*

order unit :one box

⊕⊕ 7200PP

- DOUBLE PHILLIPS head
- Long head type

KING TONY	No.	Total Length (mm)	g	
726502P	2	65	8.5	10 / 100
727502P	2	75	10.0	10 / 100
721102P	2	110	14.5	10 / 100

1/4" *Hex size shank driver*

⊕⊕ 7400PP

- DOUBLE PHILLIPS head
- Short head type

KING TONY	No.	Overall Length (mm)	g	
745002P	2	50	11.0	10 / 100
747502P	2	75	15.0	10 / 100
747503P	3	75	16.5	10 / 100
741002P	2	100	23.5	10 / 100
741502P	2	150	37.5	10 / 100

⊕⊕ 7300PP

- DOUBLE PHILLIPS head
- Long head type

KING TONY	No.	Overall Length (mm)	g	
734501P	1	45	9.0	10 / 100
734502P	2	45	9.0	10 / 100
734503P	3	45	10.0	10 / 100
736501P	1	65	14.0	10 / 100
736502P	2	65	14.0	10 / 100
736503P	3	65	14.5	10 / 100
731101P	1	110	26.0	10 / 100
731102P	2	110	26.0	10 / 100
731103P	3	110	26.5	10 / 100
731502P	2	150	32.0	10 / 100
731503P	3	150	33.0	10 / 100

Power Bit

- Silicon chrome vanadium alloy steel (S2)
- Nickel plated

order unit :one box

⊕⊕ 1300PN

- DOUBLE PHILLIPS head
- Long head type

KING TONY	No.	Overall Length (mm)	g	
134501P	1	45	8.5	10 / 300
134502P	2	45	9.0	10 / 300
134503P	3	45	9.0	10 / 300
136501P	1	65	14.0	10 / 200
136502P	2	65	14.0	10 / 200
136503P	3	65	14.0	10 / 200
131101P	1	110	26.0	10 / 150
131102P	2	110	26.0	10 / 150
131103P	3	110	26.5	10 / 150
131501P	1	150	36.0	10 / 100
131502P	2	150	36.5	10 / 100
131503P	3	150	37.0	10 / 100

⊕⊕ 1500PN

- DOUBLE PHILLIPS head
- Short head type

KING TONY	No.	Overall Length (mm)	g	
155001P	1	50	10.0	10 / 300
155002P	2	50	10.0	10 / 300
155003P	3	50	10.0	10 / 300
157501P	1	75	16.5	10 / 200
157502P	2	75	16.5	10 / 200
157503P	3	75	17.0	10 / 200
151001P	1	100	23.0	10 / 150
151002P	2	100	23.0	10 / 150
151003P	3	100	23.5	10 / 150
151501P	1	150	36.5	10 / 100
151502P	2	150	37.0	10 / 100
151503P	3	150	37.5	10 / 100

⊕⊖ 7300PN

- PHILLIPS / SLOTTED head
- Long head type

KING TONY	No.	Tip width (mm)	Tip thickness (mm)	Overall Length (mm)	g	
734551P	1	5.0	0.8	45	8.0	10 / 300
734552P	2	5.0	0.8	45	8.0	10 / 300
736552P	2	5.0	0.8	65	13.5	10 / 200
731152P	2	5.0	0.8	110	25.0	10 / 150
731552P	2	5.0	0.8	150	36.5	10 / 100

Bit Accessory

- Chrome vanadium & stainless alloy steel
- Anti-rust oiled , sand-blasted

1/4" *Hex size shank driver*

750

750

- Magnetic bit holder
- **2 PC.** type
- DIN 7427

KING TONY	(inch)	Total Lenght (mm)	g	
750-60	1/4	60	20.5	6 / 84

760

760 S

- Nut setter
- **Non magnetic** type
- DIN 3126

KING TONY	(inch)	Total Lenght (mm)	g	
7606508S	1/4	65	20	6 / 84
7606510S	5/16	65	30	6 / 84
7606512S	3/8	65	36	6 / 72

770

770

- Bit adapter
- **Ball** retainer type
- DIN 7428

KING TONY	(inch)	Total Lenght (mm)	g	
7702-25	1/4	25	6.0	20 / 200
7702-50	1/4	50	13.5	10 / 100
7703-50	3/8	50	23.5	6 / 84

751

751

- Magnetic bit holder
- **1 PC.** type
- With spring clip
- DIN 7427

KING TONY	(inch)	Total Lenght (mm)	g	
751-60	1/4	60	24	6 / 84
751-75	1/4	75	36	6 / 84

761

761 M
761 S

- Nut setter
- **Magnetic** type
- DIN 3126

KING TONY	mm / inch	Total Lenght (mm)	g	
7616507M	7	65	25	6 / 84
7616508M	8	65	30	6 / 84
7616510M	10	65	37	6 / 72
7614208S	1/4	42	15.0	6 / 90
7614210S	5/16	42	17.5	6 / 90
7614512S	3/8	45	22.5	6 / 84
7616508S	1/4	65	30.0	6 / 84
7616510S	5/16	65	31.5	6 / 84
7616512S	3/8	65	37.5	6 / 72
7616514S	7/16	65	39.5	6 / 72

771

771

- Bit adapter
- **Pin** retainer type
- DIN 7428

KING TONY	(inch)	Total Lenght (mm)	g	
7712-02	1/4	50	12.5	10 / 100
7712-03	1/4	75	33.5	10 / 100

752

752

- Magnetic bit holder
- **2 PC.** type
- With quick-release sleeve
- DIN 7427

KING TONY	(inch)	Total Lenght (mm)	g	
752-60	1/4	60	24.5	6 / 72
752-75	1/4	75	36.5	6 / 72

753

753 NEW

- Magnetic Bit Holder
- **2 PC.** type
- With quick-release sleeve
- DIN 7427

KING TONY	(inch)	Total Lenght (mm)	g	
753-63	1/4	63	33	6 / 72

Bicycle Tool Set

Bicycle Compact Tool NEW

20A16MR

- SPOKE WRENCHES : 14G
  EXTENSION BAR
  WRENCHES : 8/10/15 MM

	Contents	g	
20A16MR	H2 H2.5 H3 H4 H5 H6 8 9 10 mm PH2 5.0	253	12 / 72

Bicycle Compact Tool NEW

20A17MR

- SPOKE WRENCHES : 14G / 15G / 0.136"
  CHAIN TOOL
  SOCKET : 8MM

	Contents	g	
20A17MR	H2.5 H3 H4 H5 H6 9 10 12 13 15 PH2 5.0	260	12 / 72

Aluminum Folding Hex Key Wrench Set

20317MR

	PC./SET	Spec.	Contents	kg	
20317MR	7	knife type	H1.5 H2 H2.5 H3 H4 H5 H6	0.09	10 / 200

Aluminum Folding Tool Set

20306PR

- Special design suitable for bike

	PC./SET	Spec.	Contents	kg	
20306PR	6	knife type	H3 H4 H5 H6 PH2 5.0	0.11	12 / 72

Hex Key

- MATERIAL - SNCM + V alloy steel
- FINISHING - chrome plated

1145 M

- Standard arm type
- Allen head
- Metric size - DIN 911

KING TONY	mm	ℓ (mm)	L (mm)	g	
114515M	1.5	15.5	46.5	0.9	20/400
114502M	2.0	18.0	52.0	1.8	20/400
114525M	2.5	20.5	58.5	3.0	20/400
114503M	3.0	23.5	66.0	5.0	20/400
114504M	4.0	29.5	74.0	10.0	20/400
114505M	5.0	33.0	85.0	18.0	20/400
114555M	5.5	35.5	90.5	24.0	10/400
114506M	6.0	38.0	96.5	30.0	10/200
114507M	7.0	41.0	102	45.0	10/200
114508M	8.0	44.0	108	60.0	10/200
114510M	10.0	50.0	122	105.0	10/200



1125 M
1125 S

- Extra long arm type
- Allen head
- Metric size - DIN 911
- Inch size

KING TONY	mm / inch	ℓ (mm)	L (mm)	g	
112515M	1.5	15.5	91.5	1.5	20/400
112502M	2.0	18.0	102	3.0	20/400
112525M	2.5	20.5	114.5	5.0	20/400
112503M	3.0	23.0	129	8.0	20/300
112504M	4.0	29.0	144	18.0	20/300
112505M	5.0	33.0	165	31.0	20/300
112506M	6.0	38.0	186	51.0	10/100
112507M	7.0	41.0	197	78.0	10/100
112508M	8.0	44.0	208	104.0	10/100
112510M	10.0	50.0	234	182.0	10/100
112512M	12.0	57.0	262	290.0	8/48
112514M	14.0	70.0	294	451.0	8/48
112517M	17.0	80.0	337	770.0	4/32
112519M	19.0	89.0	380	863.0	5/20
112522M	22.0	102.0	400	1590.0	4/16
112504S	1/8	23	129	8.0	20/400
112505S	5/32	29	144	18.0	20/300
112506S	3/16	33	165	31.0	20/300
112508S	1/4	38	186	51.0	10/100
112510S	5/16	44	208	104.0	10/100
112512S	3/8	50	234	182.0	10/100
112516S	1/2	57	262	290.0	8/48
112518S	9/16	70	294	451.0	8/48

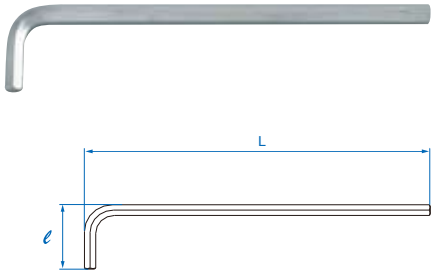

Spline L- wrench

1126

- **Extra long** type
- For Spline head screws

KING TONY	SIZE	ℓ (mm)	L (mm)	g	
112605M	M5	33	165	28.2	20 / 300
112606M	M6	38	186	46.4	20 / 300
112608M	M8	44	208	90	10 / 100
112610M	M10	50	234	159.6	10 / 100
112612M	M12	53	264	237.8	10 / 80

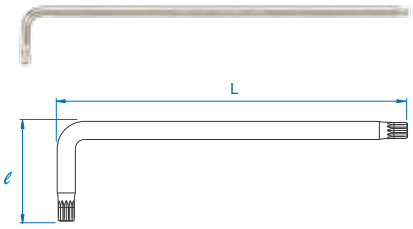

1146

- **Standard** type
- For Spline head screws

KING TONY	SIZE	ℓ (mm)	L (mm)	g	
114605M	M5	29	83	15.6	20 / 320
114606M	M6	33	90	24.8	20 / 320
114608M	M8	39	98	47	10 / 300
114610M	M10	44	111	83.6	10 / 200
114612M	M12	53	126	127	10 / 180

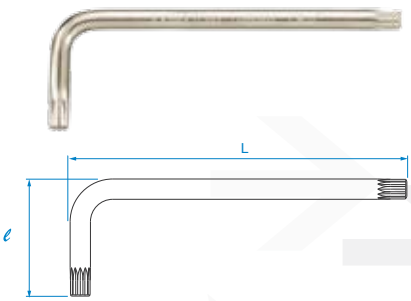

Hex Key Set

- MATERIAL - SNCM + V alloy steel
- FINISHING - chrome plated

20218 MR
20219 MR
20208 MR
20209 MR

20218MR

20219MR

20208MR

20209MR

	PC./SET	Spec.	Contents	kg	
20218MR	8	knife type	2 2.5 3 4 5 6 8 10	0.33	8 / 64
20219MR	9	Standard arm plastic holder	1.5 2 2.5 3 4 5 6 8 10	0.33	6 / 48
20208MR	8	Extra long plastic holder	2 2.5 3 4 5 6 8 10	0.43	8 / 48
20209MR	9	Extra long plastic holder	1.5 2 2.5 3 4 5 6 8 10	0.44	8 / 48

20210 MR

	PC./SET	Spec.	Contents	kg	
20210MR	10	Extra long metal case	3 4 5 6 7 8 10 12 14 17	0.47	1 / 6

20208 MR 01
20208 SR 01

	PC./SET	Spec.	Contents	kg	
20208MR01	8	Extra long color box	3 4 5 6 8 10 12 14	1.25	1 / 20
20208SR01			1/8 5/32 3/16 1/4 5/16 3/8 1/2 9/16		

20208MR01 / 20208SR01

Spline L- wrench Set

20505 PR

	PC./SET	Spec.	Contents	kg	
20505PR	5	Standard type Plastic Tray	1146 M5 M6 M8 M10 M12	0.317	56

20515 PR

	PC./SET	Spec.	Contents	kg	
20515PR	5	Extra long type Plastic Tray	1126 M5 M6 M8 M10 M12	0.609	42

Ball Hex Key

- MATERIAL - SNCM + V alloy steel
- FINISHING - chrome plated

1130 M
1130 S

- **Long** arm with **ball point** type
- Metric size - DIN 911
- Inch size

KING TONY	mm / inch	ℓ (mm)	L (mm)	g	
113015M	1.5	15.5	63.5	1.4	20/400
113002M	2.0	18.0	77.0	2.0	20/400
113025M	2.5	20.5	87.5	4.0	20/400
113003M	3.0	23.0	93.0	7.0	20/400
113004M	4.0	29.0	104	14.0	20/400
113005M	5.0	33.0	120	25.0	20/300
113006M	6.0	38.0	141	41.0	10/150
113008M	8.0	44.0	158	84.0	10/150
113010M	10.0	50.0	180	145.0	10/150
113003S	3/32	20.5	87.5	3.6	20/400
113004S	1/8	23.0	93.0	7.4	20/400
113005S	5/32	29.0	104	14.0	20/400
113006S	3/16	33.0	120	24.0	10/300
113007S	7/32	35.5	130	33.0	10/150
113008S	1/4	38.0	141	44.0	10/150
113010S	5/16	44.0	158	82.0	10/150
113012S	3/8	50.0	180	138.0	10/150

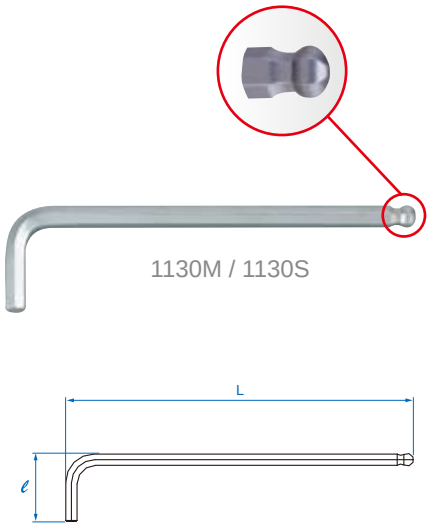

1120 M

- **Extra long** arm with **ball point** type
- Metric size - DIN 911

KING TONY	mm	ℓ (mm)	L (mm)	g	
112015M	1.5	15.5	91.5	1.5	20/400
112002M	2.0	18.0	102	3.0	20/400
112025M	2.5	20.5	114.5	5.0	20/400
112003M	3.0	23.0	129	8.0	20/300
112004M	4.0	29.0	144	18.0	20/300
112005M	5.0	33.0	165	31.0	20/300
112006M	6.0	38.0	186	51.0	10/100
112007M	7.0	41.0	197	78.0	10/100
112008M	8.0	44.0	208	104.0	10/100
112010M	10.0	50.0	234	182.0	10/100

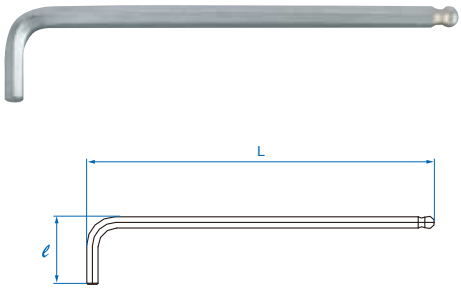

Ball Hex Key Set

- MATERIAL - SNCM + V alloy steel
- FINISHING - chrome plated

20107 MR 01
20107 SR
20108 MR
20109 MR

	PC./SET	Spec.	Contents	kg	
20107MR01	7	Long arm /ball plastic holder	1130M 2.5 3 4 5 6 8 10	0.37	10 / 60
20107SR	7	Long arm /ball plastic holder	1130S 3/32 1/8 5/32 3/16 1/4 5/16 3/8	0.36	10 / 60
20108MR	8	Extra long /ball plastic holder	1120M 2 2.5 3 4 5 6 8 10	0.43	8 / 48
20109MR	9	Extra long /ball plastic holder	1120M 1.5 2 2.5 3 4 5 6 8 10	0.44	8 / 48

20107SR

20109MR

Star L- wrench

- MATERIAL - SNCM + V alloy steel
- FINISHING - chrome plated

1143

- **Standard** type
- For torx head screws

KING TONY	SIZE	ℓ (mm)	L (mm)	g	
114310	T10	18	50.0	3.5	20/400
114315	T15	20	55.5	5.5	20/400
114320	T20	24	61.5	8.0	20/400
114325	T25	26	67.5	11.0	20/400
114327	T27	30	75.5	15.0	20/400
114330	T30	36	85.5	24.5	10/200
114340	T40	41	96.5	39.0	10/200
114345	T45	46	107	57.0	10/200
114350	T50	52	122	80.0	10/200

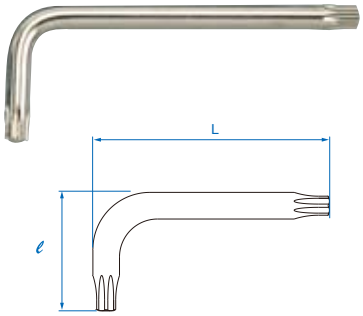

1147

- **Standard** type
- **Tamper resistant** type
- For torx head screws

KING TONY	SIZE	ℓ (mm)	L (mm)	g	
114710	T10	18	50.0	3.5	20/400
114715	T15	20	55.5	5.5	20/400
114720	T20	24	61.5	8.0	20/400
114725	T25	26	67.5	11.0	20/400
114727	T27	30	75.5	15.0	20/400
114730	T30	36	85.5	24.5	10/200
114740	T40	41	96.5	39.0	10/200
114745	T45	46	107	57.0	10/200
114750	T50	52	122	80.0	10/200

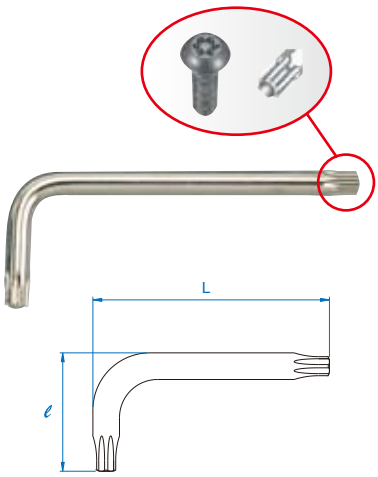

1123

- **Extra long** type
- For torx head screws

KING TONY	SIZE	ℓ (mm)	L (mm)	g	
112310	T10	18	91.5	5.8	20/400
112315	T15	20	103	8.8	20/400
112320	T20	22	115	12.9	20/400
112325	T25	25	130	18.4	20/300
112327	T27	29	145.5	25.6	20/300
112330	T30	35	165	42.2	20/300
112340	T40	40	182	63.5	10/100
112345	T45	45	202	92.4	10/100
112350	T50	49	225	130.6	10/100

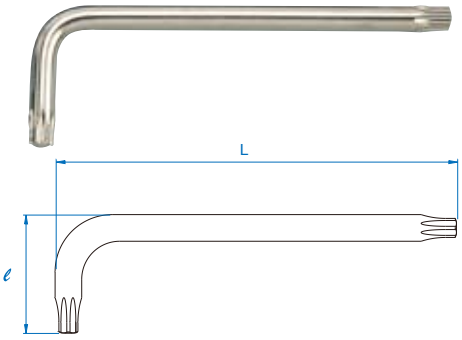

1127

- **Extra long** type
- Tamper resistant type
- For torx head screws

KING TONY	SIZE	ℓ (mm)	L (mm)	g	
112710	T10	18	91.5	5.6	20/400
112715	T15	20	103	8.6	20/400
112720	T20	22	115	12.4	20/400
112725	T25	25	130	17.8	20/300
112727	T27	29	145.5	24.6	20/300
112730	T30	35	165	40.4	20/300
112740	T40	40	182	61.6	10/100
112745	T45	45	202	89.0	10/100
112750	T50	49	225	126.2	10/100

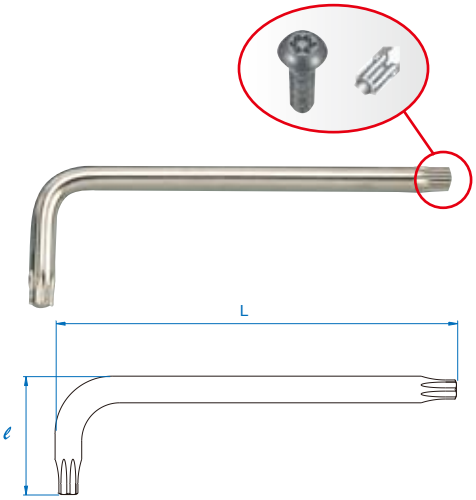

Star L- wrench Set

- MATERIAL - SNCM + V alloy steel
- FINISHING - chrome plated

20307 PR
20407 PR

	PC./SET	Spec.	Contents	kg	
20307PR	7	Standard type plastic holder	1143 — T10 T15 T20 T25 T27 T30 T40	0.13	18 / 144
20407PR	7	Standard type Tamper resistant plastic holder	1147 — T10 T15 T20 T25 T27 T30 T40	0.13	18 / 144

20308 PR

	PC./SET	Spec.	Contents	kg	
20308PR	8	knife type	1143 — T9 T10 T15 T20 T25 T27 T30 T40	0.20	12 / 72

20309 PR
20319 PR

	PC./SET	Spec.	Contents	kg	
20309PR	9	Standard type plastic holder	1143 — T10 T15 T20 T25 T27 T30 T40 T45 T50	0.3	8 / 64
20319PR	9	Extra long type plastic holder	1123 — T10 T15 T20 T25 T27 T30 T40 T45 T50	0.45	8 / 48

Star L- wrench Set

- MATERIAL - SNCM + V alloy steel
- FINISHING - chrome plated

20409 PR
20419 PR

	PC./SET	Spec.	Contents						kg	
20409PR	9	Standard type Tamper resistant plastic holder	1147	T10	T15	T20	T25	T27	T30	T40	T45	T50	0.34	8 / 64
20419PR	9	Extra long type Tamper resistant plastic holder	1127	T10	T15	T20	T25	T27	T30	T40	T45	T50	0.45	8 / 48

L- type Wrench

- MATERIAL - SNCM + V alloy steel
- FINISHING - chrome plated with black tip

1160

- Hexagon with **ball point** head
- Metric size

KING TONY	(mm)	ℓ (mm)	L (mm)	g	
116002M	2.0	100	150	19.0	10 / 200
116025M	2.5	100	150	21.5	10 / 200
116003M	3.0	100	150	25.0	10 / 200
116004M	4.0	100	150	32.5	10 / 200
116005M	5.0	150	215	74.0	10 / 200
116006M	6.0	150	215	92.0	10 / 200
116007M	7.0	150	215	120.0	10 / 200
116008M	8.0	200	280	212.5	10 / 80
116010M	10.0	200	280	289.5	10 / 80

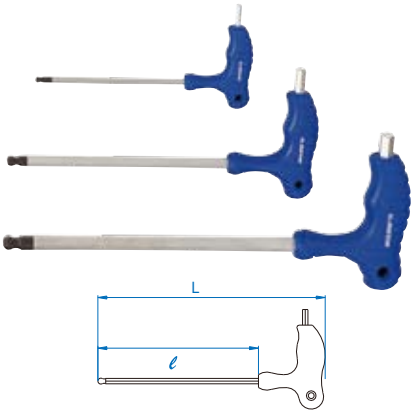

1163

- For torx internal screws
- Tamper resistant type

KING TONY	SIZE	ℓ (mm)	L (mm)	g	
116310	T10	100	150	24.0	10 / 200
116315	T15	100	150	27.0	10 / 200
116320	T20	100	150	31.0	10 / 200
116325	T25	100	150	35.5	10 / 200
116327	T27	150	215	69.5	10 / 200
116330	T30	150	215	86.0	10 / 200
116340	T40	150	215	105.5	10 / 200
116345	T45	200	280	181.5	10 / 80
116350	T50	200	280	214.5	10 / 80

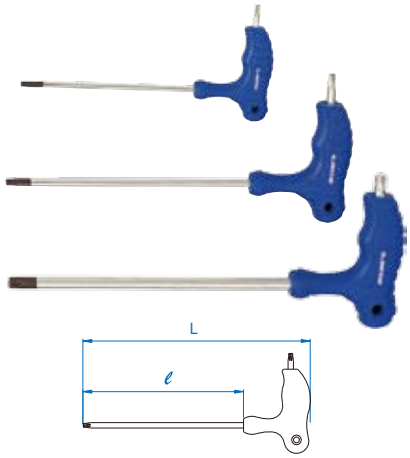

1165

- For hexagon head screws
- Metric size

KING TONY	(mm)	ℓ (mm)	L (mm)	g	
116502M	2.0	100	150	19.0	10 / 200
116525M	2.5	100	150	21.5	10 / 200
116503M	3.0	100	150	25.0	10 / 200
116504M	4.0	100	150	32.5	10 / 200
116505M	5.0	150	215	74.0	10 / 200
116506M	6.0	150	215	92.0	10 / 200
116507M	7.0	150	215	120.0	10 / 200
116508M	8.0	200	280	212.5	10 / 80
116510M	10.0	200	280	289.5	10 / 80

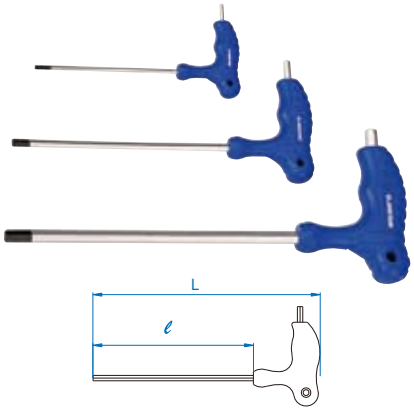

L- type Wrench Set

- MATERIAL - SNCM + V alloy steel
- FINISHING - chrome plated with black tip

22106 MR
22306 PR

22106MR

22306PR

	PC./SET	Spec.	Contents	kg	
22106MR	6	Ball & hex two way type	1160 3 4 5 6 7 8	0.68	20
22306PR	6	Torx head two way type	1163 T10 T15 T20 T25 T30 T40	0.46	20

22108 MR
22208 MR
22309 PR

22108MR

22208MR

22309PR

	PC./SET	Spec.	Contents	kg	
22108MR	8	Ball & hex two way type	1160 2 2.5 3 4 5 6 8 10	0.97	10
22208MR	8	Hex head two way type	1165 2 2.5 3 4 5 6 8 10	0.97	10
22309PR	9	Torx head two way type	1163 T10 T15 T20 T25 T27 T30 T40 T45 T50	1.0	10

22118 MR
22218 MR
22319 PR

22118MR

22218MR

22319PR

	PC./SET	Spec.	Contents	kg	
22118MR	8	Ball & hex two way type	1160 2 2.5 3 4 5 6 8 10	1.1	12
22218MR	8	Hex head two way type	1165 2 2.5 3 4 5 6 8 10	1.1	12
22319PR	9	Torx head two way type	1163 T10 T15 T20 T25 T27 T30 T40 T45 T50	1.2	12

T - type Wrench

- MATERIAL - SNCM + V alloy steel
- FINISHING - chrome plated with black tip

1150 M

- Hexagon with ball point head
- Metric size

KING TONY	(mm)	ℓ (mm)	L (mm)	g	
115002M	2.0	100	137	28	10 / 200
115025M	2.5	100	137	30	10 / 200
115003M	3.0	100	137	32	10 / 200
115004M	4.0	100	137	38	10 / 200
115005M	5.0	150	188	65	10 / 200
115006M	6.0	150	188	79	10 / 200
115008M	8.0	200	240	159	10 / 120
115010M	10.0	200	240	217	10 / 120

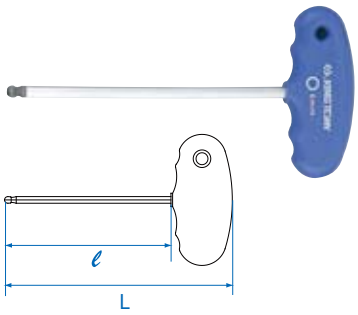

1155 M

- Hexagon head
- Metric size

KING TONY	(mm)	ℓ (mm)	L (mm)	g	
115502M	2.0	100	137	28	10 / 200
115525M	2.5	100	137	30	10 / 200
115503M	3.0	100	137	32	10 / 200
115504M	4.0	100	137	38	10 / 200
115505M	5.0	150	188	65	10 / 200
115506M	6.0	150	188	79	10 / 200
115508M	8.0	200	240	159	10 / 120
115510M	10.0	200	240	217	10 / 120

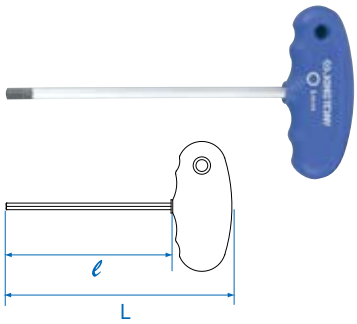

1153

- For torx head screws

KING TONY	SIZE	ℓ (mm)	L (mm)	g	
115310	T10	100	137	40	10 / 200
115315	T15	100	137	40	10 / 200
115320	T20	100	137	40	10 / 200
115325	T25	100	137	40	10 / 200
115327	T27	150	188	73	10 / 200
115330	T30	150	188	74	10 / 200
115340	T40	150	188	88	10 / 200
115345	T45	200	240	173	10 / 120
115350	T50	200	240	173	10 / 120

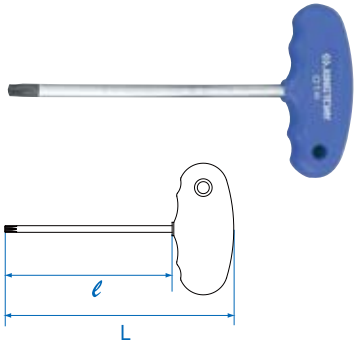

21108 MR
21208 MR
21309 PR

21108MR

21208MR

21309PR

	PC./SET	Spec.	Contents	kg	
21108MR	8	Ball hex Stand type	1150 2 2.5 3 4 5 6 8 10	1.1	1 / 12
21208MR	8	Hexagon Stand type	1155 2 2.5 3 4 5 6 8 10	1.1	1 / 12
21309PR	9	Torx head Stand type	1153 T10 T15 T20 T25 T27 T30 T40 T45 T50	1.2	1 / 12

Notes

Other Tools

■ Punch ■ Second Cut File Set ■ Flat Chisel ■ Gear Puller & Sawing
■ Hammer ■ Saw & Riveter ■ Measure Tape & Set
■ Measuring ■ Metric Feeler Gauge ■ Blow Gun

GENUINE HICKORY

KING TONY
KING TONY

Punch

- MATERIAL - chrome vanadium alloy steel
- FINISHING - phosphate sunk

761

761 Center punch

KING TONY	SIZE	Overall Length (mm)	g	
76103-04	3 x 100	100	34	12 / 336
76104-05	4 x 120	120	59	12 / 336
76105-06	5 x 150	150	116	12 / 144

762

762 Flat Chisel

KING TONY	SIZE	Overall Length (mm)	g	
76213-04	13 x 100	100	69	12 / 336
76215-05	15 x 125	125	70	12 / 336
76217-06	17 x 150	150	145	12 / 144
76220-07	20 x 175	175	300	12 / 144
76223-08	23 x 200	200	300	12 / 72
76224-10	24 x 250	250	388	4 / 40
76226-12	26 x 300	300	650	4 / 32

763

763 Starter punch

KING TONY	SIZE	Overall Length (mm)	g	
76301-05	1 x 120	120	57	12 / 336
76302-05	2 x 120	120	58	12 / 336
76303-05	3 x 120	120	60	12 / 336
76304-05	4 x 120	120	60	12 / 336
76305-05	5 x 120	120	64	12 / 336
76306-05	6 x 120	120	64	12 / 336
76307-05	7 x 120	120	100	12 / 240
76308-05	8 x 120	120	100	12 / 240
76309-06	9 x 150	150	130	12 / 144
76310-06	10 x 150	150	132	12 / 144

764

764 Pin punch

KING TONY	SIZE	Overall Length (mm)	g	
76402-45	2 x 30	115	32	10 / 640
76403-05	3 x 40	125	34	10 / 640
76404-06	4 x 50	150	60	10 / 250
76405-65	5 x 50	165	71	10 / 280
76406-07	6 x 50	180	125	10 / 150
76408-08	8 x 50	200	130	10 / 120
76410-85	10 x 65	215	155	12 / 120
76412-09	12 x 70	230	356	10 / 80
76414-10	14 x 75	250	502	6 / 48

Pin Punch Set

KING TONY	Contents	kg	
1006PR	764 Ø 2 x 30 Ø 3 x 40 Ø 4 x 50 Ø 5 x 55 Ø 6 x 55 Ø 8 x 60	0.57	20
1009PR	764 Ø 2 x 30 Ø 3 x 40 Ø 4 x 50 Ø 5 x 55 Ø 6 x 55 Ø 8 x 60 Ø10 x 65 Ø12 x 70 Ø14 x 75	1.67	12
1010PR	761 Ø 3 x 100 Ø 4 x 120 Ø 5 x 150 763 Ø 3 x 120 Ø 6 x 120 Ø 8 x 120 764 Ø 3 x 40 Ø 4 x 50 Ø 5 x 55 Ø 6 x 55	0.86	24

1006PR

1009PR

1010PR

Flat Chisel & Punch Set

1090PR1

- 90 PC. flat chisel & punch set

KING TONY		Contents				Each Q'ty
1090PR1	1090PR	761	Ø 4 x 120 Ø 5 x 150	764	Ø 3 x 125 Ø 4 x 150 Ø 5 x 165 Ø 6 x 180 Ø 10 x 215	6
		762	17 x 150 mm 20 x 150 mm 23 x 200 mm 24 x 250 mm	767	150 mm 200 mm	
		763	4 x 120 mm 8 x 120 mm			
	8711B					

KING TONY	kg	CUFT	Screwdriver shelf size (mm)
1090PR	13.5	0.34'	109 x 81 x 39
8711B	6.2	0.9'	650 x 250 x 210

Second Cut File

1005ZQ 1015ZQ

- 8" & 10" second cut files without handle
- Available with T2 cut for precision work

KING TONY	Contents			L (inch)	g	
1005ZQ (for 8")	▮ 75102-08 ◖ 75202-08 ● 75302-08		▲ 75402-08 ■ 75502-08	8"	551	20
1015ZQ (for 10")	▮ 75102-10 ◖ 75202-10 ● 75302-10		▲ 75402-10 ■ 75502-10	10"	977	10

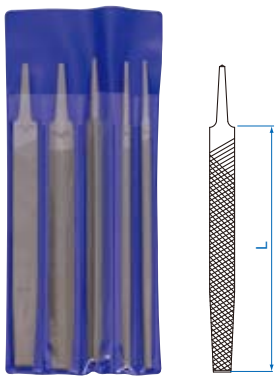

1005ZQ / 1015ZQ

1005GQ 1015GQ

- 8" &10" second cut files with handle
- Available with T2 cut for precision work

KING TONY	Contents			L (inch)	g	
1005GQ (for 8")	▮ 75102-08G ◖ 75202-08G ● 75302-08G		▲ 75402-08G ■ 75502-08G	8"	900	20
1015GQ (for 10")	▮ 75102-10G ◖ 75202-10G ● 75302-10G		▲ 75402-10G ■ 75502-10G	10"	1420	8

1005GQ / 1015GQ

91248 91249

- Spare handles for file

KING TONY	Contents	A (mm)	L (mm)	g		Spare handles for files	Second cut files without handles
91248 (for 8")	91240 ▮ 91245 ⬢ 91246	32	123	65	80	▮ 91245	▮75102-08 / ◖75202-08
						⬢ 91246	▲75402-08 ●75302-08 / ■75502-08
91249 (for 10")	91240 ▮ 91241 ⬢ 91242					▮ 91241	▮75102-10 / ◖75202-10
						⬢ 91242	▲75402-10 ●75302-10 / ■75502-10

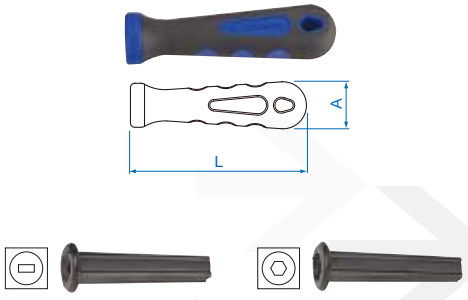

91248 / 91249

Flat Chisel

767

- For flat chisel

KING TONY	A (mm)	B (mm)	L (mm)	g	
76717-05	17.1	12.6	125	88	12 / 240
76721-06	19.8	15.0	150	130	6 / 144
76724-08	25.0	18.5	200	275	12 / 72
76729-10	29.3	21.7	250	470	8 / 64

767



Flat Chisel Set

11104PR

KING TONY	Contents	g	
11104PR	767: 76717-05 76721-06 76724-08 76729-10 87108	1373	20

11104PR10

KING TONY	Contents	g	
11104PR10	767: 76717-05 76721-06 76724-08 76729-10	963	20

Metal Holder

87108

- For flat chisel

KING TONY	H (mm)	L (mm)	g	
87108	140	160	410	12

Screw Extractor Set

11205SQ

- Quick and easy way to remove broken screws, pipes, bolts and studs.

KING TONY		Contents	Specification	g	
11205SQ	5PC.	2127-06M 2127-08M 2127-11M 2127-14M 2127-18M	1/8" - 1/4" 1/4" - 5/16" 5/16" - 7/16" 7/16" - 9/16" 9/16" - 3/4"	103	25 / 100



Gear Puller

Material - chrome vanadium alloy steel
Finishing - chrome plated & phosphate sunk

7962

Two-Jaw gear puller

KING TONY	SIZE (inch)	A (mm)	B (mm)	kg	
7962-03	3	75	60	0.44	1 / 40
7962-04	4	100	95	0.78	1 / 20
7962-06	6	150	150	1.65	1 / 10
7962-08	8	200	235	3.50	1 / 5
7962-12	12	300	280	7.00	1 / 2



7963

Three-Jaw gear puller

KING TONY	SIZE (inch)	A (mm)	B (mm)	kg	
7963-03	3	75	60	0.55	1 / 40
7963-04	4	100	95	1.06	1 / 20
7963-06	6	150	150	2.25	1 / 10
7963-08	8	200	235	4.50	1 / 5
7963-12	12	300	280	11.00	1 / 2



Hammer

- Material - high quality alloy steel
- Handle - high-safety hickory

CAUTION

When using any hammer tool, always remember to protect your sight against the risk of flying chips.

7811

- American style.
- Forged and hardened steel
- Wood and metal wedge
- GGG, H86C

KING TONY	H.W (g)	H.W (LB)	A (mm)	H (mm)	L (mm)	g	
7811-08	245	1/2	25	80	300	375	6 / 60
7811-12	370	3/4	29	93	300	485	6 / 48
7811-16	485	1	32.5	103	353	640	6 / 36
7811-24	765	1-1/2	35.5	122	405	975	1 / 24
7811-32	925	2	40.5	125	405	1200	6 / 24
7811-40	1125	2-1/2	42.2	133	405	1395	4 / 12

7811



7821

- German style
- Forged and hardened steel
- Wood and metal wedge
- DIN 1041

KING TONY	H.W (g)	A (mm)	H (mm)	L (mm)	g	
7821-30	395	23	103	300	400	12 / 48
7821-50	615	27	120.5	320	660	6 / 36
7821-80	990	33	130	350	960	12 / 24

7821



7822

- Riveting hammer
- NF E71-016

KING TONY	H.W (g)	A (mm)	B (mm)	H (mm)	L (mm)	g	
7822-25	315	25	22	85	315	489	10/40
7822-30	400	30	26	95	323	650	10/40
7822-35	630	35	31	105	353	1000	9/18
7822-40	800	40	35	115	362	1330	8/16
7822-45	1250	45	40	124	385	1790	8/16
7822-50	1600	50	44	135	400	2458	6/12

7822

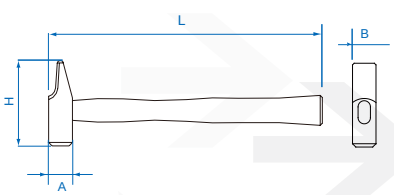

Hammer

- Material - high quality alloy steel
- Handle - high-safety hickory

CAUTION

When using any hammer tool, always remember to protect your sight against the risk of flying chips.

7823

- Engineer's hammer
- DIN1041

KING TONY	H.W (g)	A (mm)	H (mm)	L (mm)	g	/
7823-10	1000	36	135	360	1121	9/18
7823-15	1500	42	145	380	1606	6/12
7823-20	2000	47	155	400	2106	6/12

7823



7833

- Lump hammer
- DIN6475

KING TONY	H.W (g)	A (mm)	H (mm)	L (mm)	g	/
7833-10	1000	40	95	260	1065	12
7833-12	1250	43	100	260	1425	12
7833-15	1500	45	110	280	1778	12
7833-20	2000	50	120	300	2142	8

7833



7851

- Dead blow hammer

KING TONY	H.W (g)	A (mm)	H (mm)	L (mm)	g	/
7851-08	227	43	81	272	585	36
7851-16	454	46	100	304	849	24
7851-24	680	49	100	322	884	24
7851-32	907	55	100	342	1090	24
7851-40	1134	58	110	342	1218	24
7851-48	1361	61	123	355	1511	12
7851-64	1814	67	136	368	1874	12

7851



7842

- Soft face hammer (changable head)
- Material : Polyurethane

KING TONY	A (mm)	H (mm)	L (mm)	g	/
7842-22	22	74	260	102	40
7842-28	28	88	300	160	40
7842-35	38	100	320	312	32
7842-45	45	112	320	468	32
7842-60	60	136	380	882	12

7842



915

- Spare faces for item 7842
- H : Hard / S : Soft
- Material : Polyurethane

KING TONY	Hardness (shore A)	A (mm)	g	/
91522H/S	90°/75°	22	11	10/160
91528H/S	90°/75°	28	24	10/100
91535H/S	90°/75°	38	36	6/120
91545H/S	90°/75°	45	65	6/36
91560H/S	90°/75°	60	125	6/24



915

Saw

7911-12

- Sliding metal bow
- Lightweight, resistant to anti oxidization
- Two blade positions 45° and 90° including flush cut
- Ergonomics handle with hand stop oil resistant, moisture-resistant

KING TONY	Adjustable Blade Length(mm)	Overall Length (mm)	g	
7911-12	305	400	628	6 / 36

7911-12

7921-12

- Sliding metal bow
- Handle material : ABS+TPR.
- Lightweight & anti-slippery.
- Four blade positions 45°, 90°, 135°, 180° including flush cut
- Spare blades can be stored.

KING TONY	Adjustable Blade Length(mm)	Overall Length (mm)	g	
7921-12	300	510	555	1 / 50

7921-12

Way to replace the blade

1.

To loosen the button.

2.



To press the button then pull the tube to take out the blade.

3.

Replace the new blade.

Riveter

21-20-101

- Capacity Ø 4.8mm
- Stainless Steel Riveter
- Drop-forged aluminum body

KING TONY	L (mm)	L (inch)	g		Nosepiece (mm)	Nosepiece (inch)
21-20-101	260	10-1/4	588	24	Ø 2.4	3/32
					Ø 3.2	1/8
					Ø 4.0	5/32
					Ø 4.8	3/16

Ø 2.4~4.8mm

21-20-102 NEW

- 4 size quickly and easily to change
- The drive can be used in 90° and 180°

KING TONY	L (mm)	L (inch)	g		Nosepiece (mm)	Nosepiece (inch)
21-20-102	278	11	778	6 / 24	Ø 2.4	3/32
					Ø 3.2	1/8
					Ø 4.0	5/32
					Ø 4.8	3/16

Riveter

79711

- Capacity Ø 6.4mm
- Stainless Steel Riveter
- Drop-forged aluminum body

KING TONY	L (mm)	L (inch)	g		Nosepiece (mm)	Nosepiece (inch)
79711	460	18	1488	12	Ø 3.2	1/8
					Ø 4	5/32
					Ø 4.8	3/16
					Ø 6.4	1/4

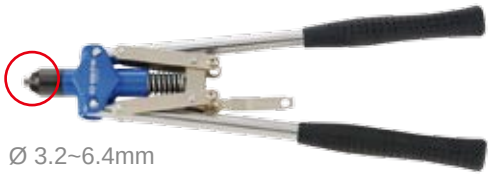

Ø 3.2~6.4mm

Riveter Set

21-20-07MR

KING TONY	Contents	Each Q'ty
21-20-07MR	4 x 8 mm; 4 x 10 mm; 4 x 10 mm; 4.8 x 8 mm; 4 x 8 mm; 4.8 x 10 mm	20
	21-20-101	

kg		Plastic case size (mm)
1.06	1 / 16	276 x 160 x 46 (0.122 cuft)

Measuring Tape

- Material:ABS
- Metric/inch system
- Side and bottom Tape-lock-buttom

79083

KING TONY	L (M)	B (mm)	g	
79083-03C	3	13	116	12 / 72
79083-05C	5	19	210.4	12 / 72



79084

- Magnet hook

KING TONY	L (M)	B (mm)	g	
79084-03C	3	16	116.6	12 / 72
79084-05C	5	19	210.4	12 / 72

Measuring Tape Set

- Material:ABS
- Metric/inch system
- Side and bottom Tape-lock-buttom

790831CQ

- 12 PC. measuring tape set

	PC./SET	Contents	kg	
79083-03C	6		12.2	1 / 6
79083-05C	6			

790841CQ

- 12 PC. measuring tape set
- Magnet hook

	PC./SET	Contents	kg	
79084-03C	6		12.2	1 / 6
79084-05C	6			

Measuring

79061

- 1 side both edges photo-engraved mm-scale
- Flexible stainless graduated rule

KING TONY	L (mm)	W (mm)	T (mm)	g	
79061-12	300	23.7	1.0	65	20 / 400
79061-20	500	28.5	1.2	145	10 / 160
79061-40	1000	35.0	1.2	360	10 / 20

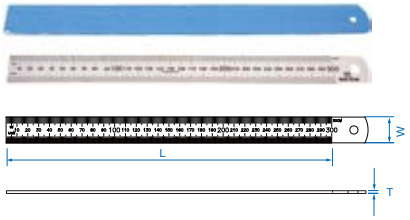

77121

- Made of stainless steel with fine adjustment
- Vernier calipers with external upper jaw

KING TONY	A (mm)	B max (mm)	Vernier (mm)	H X S (mm)	g	
77121-08	60	200	0.02	20 x 4	860	10

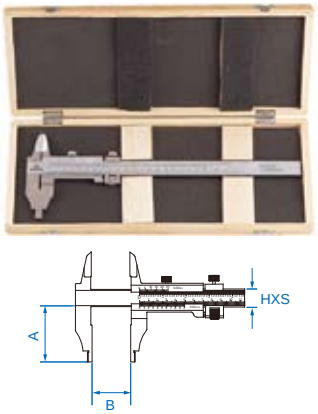

77131

- Parallax free bevel vernier calipers

KING TONY	A (mm)	B max (mm)	Vernier (mm)	H X S (mm)	g	
77131-06	40	150	0.02	16 x 3	320	50
77131-08	50	200	0.02	20 x 4	450	50

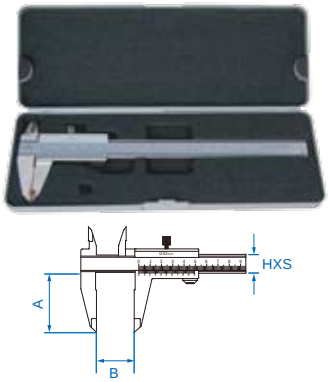

77141

- Open slider digital calipers
- Manual power on / off
- Metric / inch system interchange at any position with data output interface

KING TONY	A (mm)	B (mm)	Accuracy (mm)	Vernier (mm)	g	
77141-06	40	150	0.01	0.01	320	20
77141-08	50	200	0.01	0.01	485	50

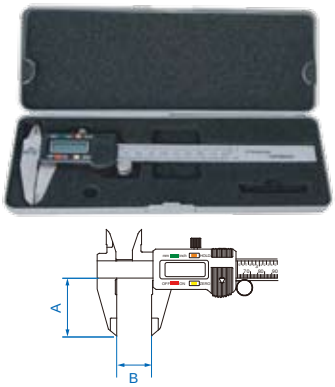

Metric Feeler Gauge

- Material: Blade material of stainless steel

77340-20

- 20 BLADES METRIC FEELER GAUGE

KING TONY	Number of Blades	Width x Length of Blades (mm)	Contents:	g	
77340-20	20	10 x 100	0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 0.95, 1.00 mm	105	50 / 200

Metric Feeler Gauge

- Material: Blade material of stainless steel

77335-25

- 25 BLADES METRIC FEELER GAUGE

KING TONY	Number of Blades	Width x Length of Blades (mm)	Contents:	g	
77335-25	25	13 x 85	0.04, 0.05, 0.06, 0.07, 0.08, 0.09, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 0.95, 1.00 mm	110	50 / 200

Blow Gun

79900

- High pressure nozzle
- Sure grip handle design
- Ideal for cleaning surfaces

KING TONY	L (mm)	g	
79900-04	242	200	2 / 60
79900-10	402	240	2 / 50
79900-13	472	260	2 / 50
79900-20	652	300	2 / 50

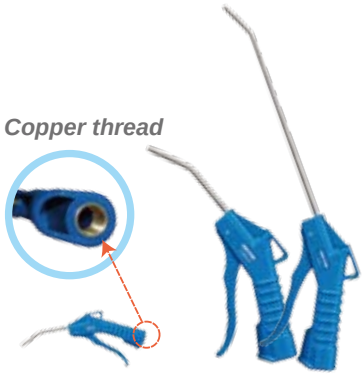

Specification:

Body material	nylon fiber	Air consumption (90psi)	1/4" hose-13cfm-350l/min 3/8" hose-15cfm-430l/min
Nozzle material	steel		
Working pressure	75~120psi/5.0~8.0kgs		
Max pressure	220psi/15kgs	Air inlet thread	Sae size : 1/4" npt Metric size : 1/4" pt
Sound pressure	85-90db		



Blow Gun Set

799001DQ

- 18 PC. blow gun set

	PC./SET	Contents	kg	
79900-04	8		2.8	1 / 6
79900-10	6			
79900-13	4			
SY-211M	18	(European type)		

Automotive Tools

- Engine Series
- Undercar Series
- Body Series
- Battery & Electrical
- General Tools

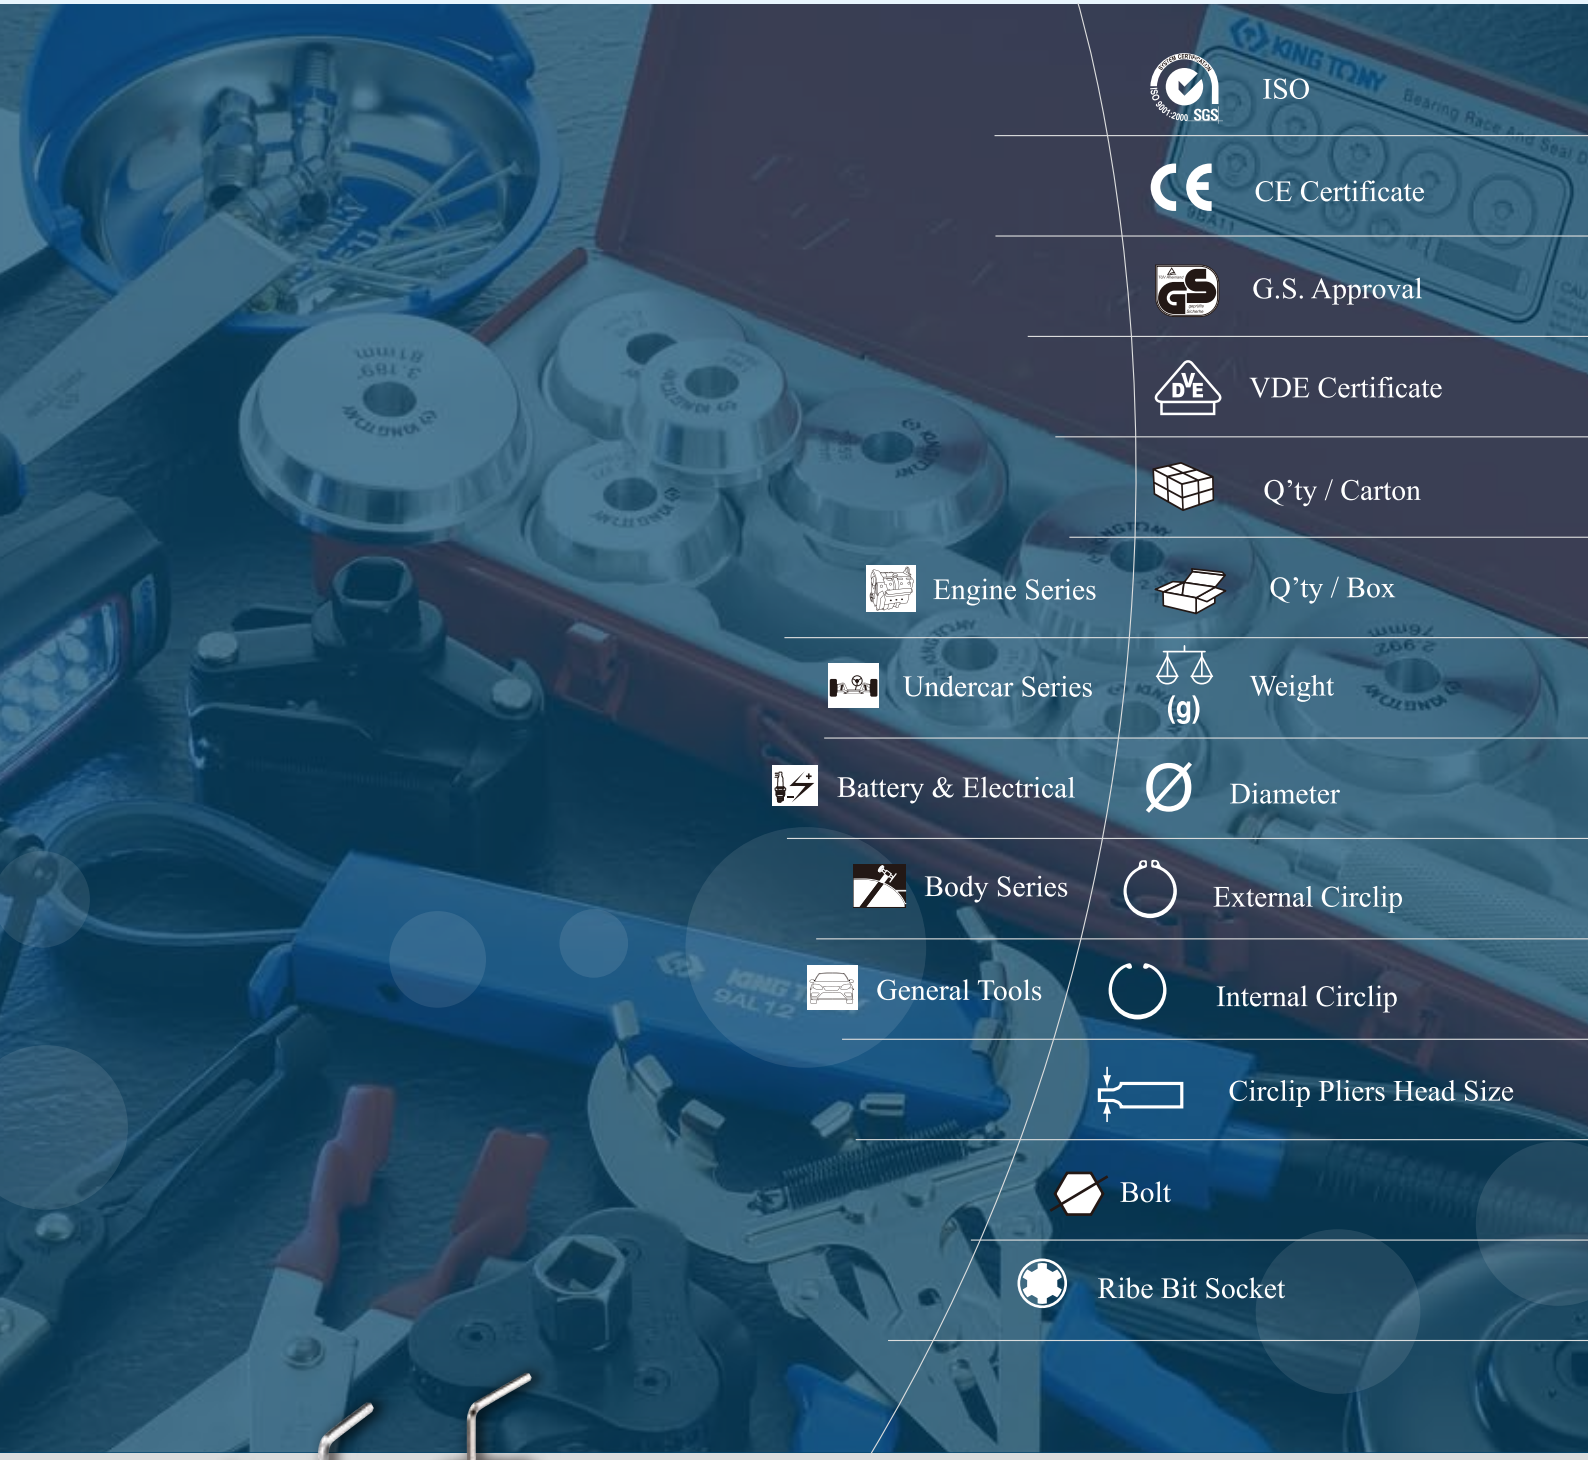

ISO

CE Certificate

G.S. Approval

VDE Certificate

Q'ty / Carton

Engine Series

Q'ty / Box

Undercar Series

Weight

Battery & Electrical

Diameter

Body Series

External Circlip

General Tools

Internal Circlip

Circlip Pliers Head Size

Bolt

Ribe Bit Socket

Curved Hose Clamp Pliers

9AA21

- Designed to remove and install flat band hose clamp in hard-to reach areas.
- Locking latch securely holds clamp in position.
- 45° designed to fit some clamps in deep position.





KING TONY	L (mm)	L (inch)	Ø (mm)	g	
9AA21	220	8-1/2	18~53	224	12 / 48

Flexible Hose Clamp

9AA31

- For replacement of fuel, oil and water hose.
- Hose clamps with flexible 630mm wire.
- Convenient for working hidden areas and long distance.



KING TONY	L1 (mm)	L1 (inch)	L2 (mm)	L2 (inch)	Ø (mm)	g	
9AA31	630	25	225	9	12~53	528	12 / 36

Valve Stem Seal Pliers

9AD11

- For removing valve stem seals in multi-valves engines.
- Jaw longitudinal toothed - avoids slipping down.
- For deeply leveled valve stem seals.

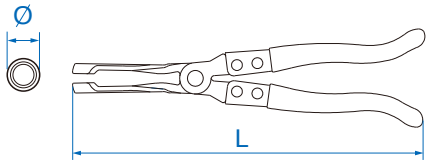

KING TONY	L (mm)	L (inch)	Ø (mm)	g	
9AD11	275	11	9.5	400	12 / 48

Piston Ring Compressor

9AC

- The square adjustment key wrench forces the rings into the grooves and cluch controls prevent them from expanding.



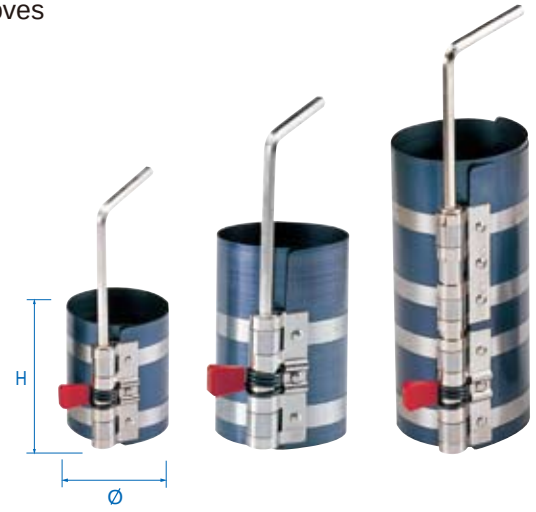

KING TONY	H (mm)	H (inch)	Ø (mm)	Ø (inch)	g	
9AC125-32	80	3-1/4	57~125	2-1/4~5	260	1/60
9AC125-40	100	4	57~125	2-1/4~5	280	1/60
9AC175-32	80	3-1/4	90~175	3-1/2~7	300	1/60
9AC175-40	100	4	90~175	3-1/2~7	320	1/60
9AC175-66	165	6-3/4	90~175	3-1/2~7	530	1/40

Piston Ring Pliers

9AP

- Special steel
- Nickle - plated
- For removing and mounting piston rings

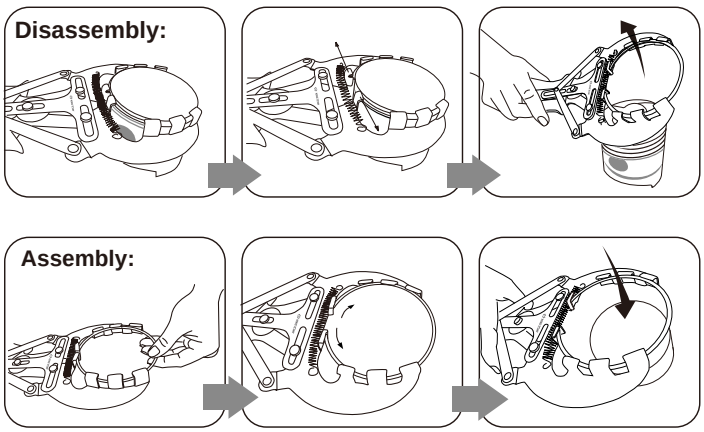

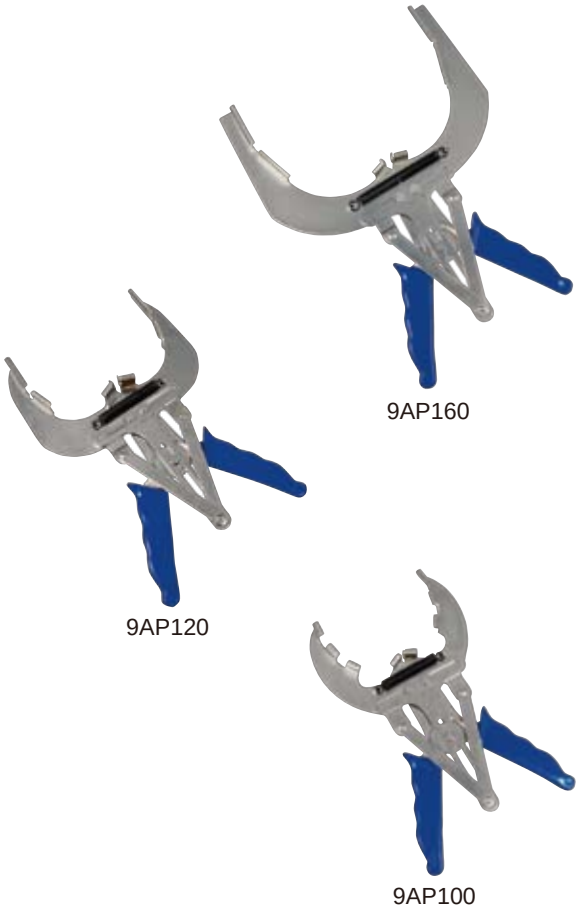

KING TONY	L (mm)	L (inch)	Capacity (mm)	g	
9AP100	212	8-11/32	50~100	323	12 / 48
9AP120	227	8-15/16	80~120	354	12 / 48
9AP160	253	9-61/64	110~160	458	12 / 48

16 PC. Cup Type Oil Filter Wrench Kit

9AE2016

- Withstands up to 85 ft.lbs
- Coated with electro-black oxide finish for protection against rust.
- 1PC. 1/2(F)x3/8"(M) adapter
- 1PC. 3 legged oil filter wrench(65-120mm)

9AE2-6606	66mm(2-19/32")-6 flutes-1 step Fiat(Punto, 1.2), Renault(Clio 1.2 Express, Kangoo. Rapid. Twingo), etc....
9AE2-7476	74 to 76mm(2-29/32" to 3")-15 flutes-2 step Fits Fram, AC, Saturn, Opel, VW, Audi, Mercedes, etc....
9AE2-7608	76mm(3")-8 flutes-1 step Fiat(z.B. Marea), Lancia(z.B. Delta), etc....
9AE2-7612	76mm(3")-12 flutes-1step Fiat(z.B. Ducato, Scudo, Ulysee),Renault, (Megane, Laguna, Espace lll.), etc....
9AE2-7614	76mm(3")-14 flutes-1step Fits Champion, Champ Lee, Purolator, Mopar, VW, Porsche,Mercedes, BMW, Audi, Toyota, Opel, etc....
9AE2-8616	86mm(3-3/8")-16 flutes-1step Volvo(S40, S60, S70, S80) etc....
9AE2-8618	86mm(3-3/8")-18 flutes-1step VW. Golf.(MKIII. Tdi, Passat Tdi), Audi A6 Tdi, Renault(Clio, Rapid 1.9D, Laguna.Safrane. Espace 2.1D). Citroen, Peugeot, Renault, etc..
9AE2-9210	92mm(3-40/64")-10 flutes-1step Fiat, Cinquecento, Coupe, Croma, Fiat, Panda. Regata, Ritmo Fiat, Seicento. Tempra, Tipo, Lancia(Beta. Dedra. Kappa. Monte. Carlo. Prisma. Thema. Trevi), etc....
9AE2-9315	93mm(3-21/32")-15 flutes-1step Fits Casite, Champ, Champion, GM, Fram, Hastings,Purolator, Wix, Nissan, Volvo, Mazda, Audi, VW, Porsche, Renault, etc....
9AE2-9345	93mm(3-21/32")-45 flutes-1step VW-Audi.(TDi 2.4, 2.6, 2.8L), etc....
9AE2-9618	96mm(3-3/4")-18 flutes-1step Audi(A4 Tdi, VW Passat,97 Tdi), Renault (Laguna 2.2d. Safrane2.2D. Espace 2.2D. R19 2.2D. Rapid, Megane,1.9/2.1D. Tdi) etc..
9AE2-10615	106mm(4-11/64")-15 flutes-1step Fiat(Ducato 2.5D. Td), etc....
9AE2-10815	108mm(4-8/32")-15 flutes-1step Volvo(C70. S70. V70. Tdi. TD)(850 Tdi. TD) etc....
9AE2-10818	108mm(4-8/32")-18 flutes-1step Renault(Espace, Laguna, Master, Safrane, Traffic 2.4, 2.5, 2.8D. TD), etc....
9AE423	3 legged oil Filter Tool 63-102mm(2-1/2" to 4")
9AE221	1/2" drive adaptor 1/2" F x 3/8" M

KING TONY	g	
9AE2016	3600	1 / 5

Three-Legs Oil Filter Wrench

9AE41

- The claw-type filter is available for removing all oil filters from 2-1/2" to 4"-3/4" (63-120mm) in diameter.
- Suitable for use with 3/8" or 1/2" square drive tool.
- Coated with electro-black oxide finish for protection against rust.



KING TONY	A (inch)	B (inch)	Ø (mm)	Ø (inch)	g	
9AE41	1/2	3/8	63~120	2-1/2~4-3/4	597	6 / 36

Three-Legs Oil Filter Wrench

9AE42

- The claw-type filter is available for removing all oil filters from 2-1/2" to 4" (63-102mm) in diameter.
- Suitable for use with 3/8" or 1/2" square drive tool.
- Coated with electro-black oxide finish for protection against rust.

9AE42

9AE221

9AE423

KING TONY	A (inch)	B (inch)	Ø (mm)	Ø (inch)	g	
9AE221	1/2	3/8	-	-	39	-
9AE42	1/2	3/8	63~102	2-1/2~4	395	12 / 48
9AE423	-	3/8	63~102	2-1/2~4	356	12 / 48

Two Jaws Oil Filter Wrench

9AE52

- The claw-type filter is available for removing all oil filters from 2-3/8" to 4-1/8" (60-80mm) in diameter.
- Suitable for use with 1/2" square drive tool.
- Coated with electro-black oxide finish for protection against rust.



KING TONY	A (inch)	Ø (mm)	Ø (inch)	g	
9AE52	1/2	60~80	2-3/8~4-1/8	470	6 / 36

10 PC. Valve Spring Compressor Set

9AH11

- Complete Service tool kit for OHV & OHC petrol or diesel engines on Audi, Nissan, Toyota, Chrysler, Honda, Mazda, Mitsubishi, Saturn, Lexus, Hyundai, Infiniti, Porsche, Volvo, VW.



KING TONY	L (mm)	L1 (mm)	H (mm)	g	
9AH11	515	275	95	3385	1/ 5

5 PC. Valve Spring Compressor Set

9AH025

- Suitable for use on large engines & diesel engines.
- Capacity: 35~140mm
- Unique direct action compressor lever gives improved visibility & ease of use in areas of difficult access. Dual size in 25 and 30mm adapter.



KING TONY	A (mm)	B (mm)	L (mm)	g	
9AH025	35~140	280	390	2680	1/ 5

Universal Clutch Aligner Set

9AK11

- Designed to make alignment and assembly of cluth.
- Specially designed for those vehicles equipped with late-model front wheel drives-without pilot bearing in flywheel.



KING TONY	Ø (mm)	g	
9AK11	15.5~27	190	1/ 20

Pulley Removing Wrench

9AL

- To lock the pulley during removing or assembling any type of pulley retaining bolt.

KING TONY	L (mm)	L (inch)	Ø (mm)	g	
9AL11	365	(14-3/8)	40-140	540	12 / 36
9AL12	365	(14-3/8)	40-140	540	12 / 36

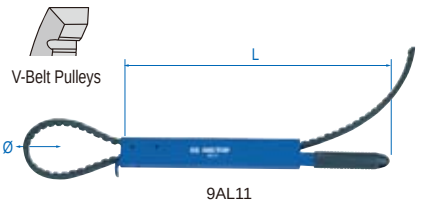

9AL11

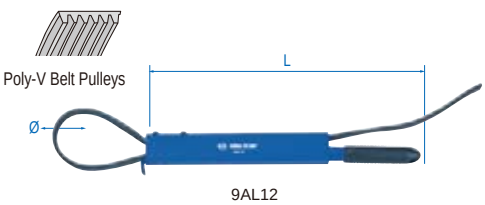

9AL12



1.
Compressors

2.
Water pump pulley

3.
Alternator pump pulley

4.
Oil filter removing & assembling

21 PC. Oil Drain Plug Key Set

9AR11 NEW

- Suitable for sump plugs on engine, gearbox and back axle
- Contents:
  Hex key socket: 8, 9, 12, 10, 13, 14, 17 mm
- Square socket：5/16", 3/8", 7, 8, 10, 11, 12, 13, 14 mm
  Torx socket：T45
  Triangular socket：10mm
  Spline (TAMPER) socket：M16
  Square drive socket：10mm
  3/8”drive sliding T-handle

KING TONY	kg	
9AR11	1.7	1 / 10

10 PC. Bearing Race and Seal Driver Set

9BA11

- Quickly and easily to insert bearing race.
- Collars fit most standard wheel bearing size.
- Helps reduce damage to both race and axle housing.
- 9 collar sizes:
  (1)1.555"/39.5mm (2)1.752"/44.5mm
  (3)1.968"/50mm (4)2.322"/59mm
  (5)2.480"/63mm (6)2.559"/65mm
  (7)2.834"/72mm (8)2.992"/76mm
  (9)3.189"/81mm

KING TONY	g	
9BA11	2700	1 / 6

12 PC. Two Sets Bearing Separator Assembly

9BA21

- 2 Sets Bearing Separator & Bolts
  Capacity 30mm-50mm
  (Bolt ∅3/8" x L 120mm x 24t 415 Hardened 42°-45°)
  Capacity 50mm-75mm
  (Bolt ∅1/2" x L 135mm x 20t 415 Hardened 42°-45°)
- 4 PC. Main Rod (Hex Bar 17mm 3/8" x L 127mm x 16t)
- 4 PC. Extension Rod (Hex Bar 14mm 3/8" x L 102mm x 16t)
- 1 PC. Beam (Carbon Steel)
- 1 PC. Central Bolt (9/16" x L 175 x 10t/inch Carbon Steel)

KING TONY	g	
9BA21	5400	1 / 2

8 PC. Pressure Screw Bearing Separator Puller Set

9BA22

- Set Bearing Separator & Bolts
  Capacity 75mm-105mm
  (Bolt ∅5/8" x 18t 415 Hardened 42°-45°)
- 2 PC. Main Rod (8" x 1.75P Carbon Steel)
- 2 PC. Extension Rod (8" x 1.75P Carbon Steel)
- 1 PC. Beam (Carbon Steel)
- 1 PC. Central Bolt (∅18.65mm x L 11.5 " x 10t)
- 1 PC. Nut (Carbon Steel)

KING TONY	g	
9BA22	8950	1 / 2

Handbrake Cable Pliers

9BC11

- For hand brake cable removing and replacing.
- Suitable for Audi, BMW, Citroen, Nissan, Peugeot, Seat, Renault, Rover, etc.

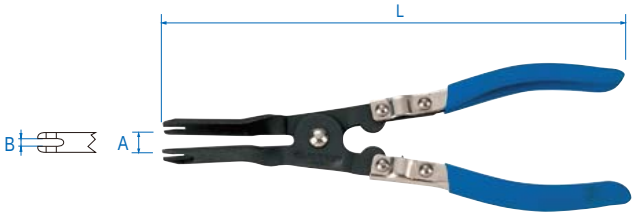

KING TONY	L (mm)	L (inch)	A Max(mm)	B (mm)	g	
9BC11	230	9	35	5	198	12 / 48

Drum Brake Spring Pliers

9BC121

- Designed to remove and replace brake retaining spring on drum brakes.

KING TONY	L (mm)	L (inch)	g	
9BC121	215	8-1/2	230	12 / 72

9BC122

- Designed to remove and replace brake retaining spring on drum brakes.

KING TONY	L (mm)	L (inch)	g	
9BC122	320	12-1/2	426	6 / 36

HGV Drum Brake Spring Pliers

9BC124

- Designed to remove and replace brake retaining spring on drum brakes.
- Extra strong version for HGV air or hydraulic drum brakes.



KING TONY	L (mm)	L (inch)	g	
9BC124	525	20-5/8	1246	3 / 6

Disc Brake Piston Separator

9BC21

- Heavy duty drop forged construction.
- Fit in brake caliper to push back pistons for new brake pads installation.



KING TONY	Max Capacity (mm)	Max Capacity (inch)	g	
9BC21	75	2-7/8	1125	1 / 20

11 PC. Universal Disc Brake Wind-Back Tool Kit

9BC22

- Magnetic socket adapter.
- Including 9 adapters for brake assemblage.
- For rotating pistons back into caliper to provide clearance for new pads.
- Prevents damage to the piston and boot.
- Suitable for V.W.-Audi, Ford, Nissan, Alfa Romeo, Rover, Saab, Subaru, Toyota, Jaguar, and most of the general motors.

KING TONY	g	
9BC22	3000	1 / 6

31 PC. Universal Disc Brake Wind-Back Tool Kit

9BC23 NEW

- For rotating pistons back into caliper to provide clearance for new pads.
- Prevents damage to the piston and boot.
- Suitable for BMW、Ford、VW、Audi、Porsche、Saab、Opel、Volvo、Jaguar、Citroen、Peugeot Renault、Lauxhall 、Lancia、Alfa romeo、Fiat、Nissan、Honda、Subaru、Toyota、Mitsubishi
- Contents:
  21pcs adapters for brake assemblage
  3pcs backing pads
  2pcs rotating caliper with 3/8”DR (right/left side threaded)
  2pcs hex key: 7, 8mm
  2pcs pin punch : Ø5.5, 6mm
  1pc 3/8”DR x 12mm hex key socket

KING TONY	kg	
9BC23	4.76	1 / 4

Ball Joint Extractor

9BE11

- Drop forged steel body.
- Max jaw opening: 50mm

KING TONY	A (mm)	min B (mm)	max B (mm)	C (mm)	D (mm)	E (mm)	g	
9BE11	160	12	50	19	19	25	1083	1 / 12



9BE21

- Special design 2-stage operating suits most cars and light trucks ball joints in steering & suspension.
- Jaw open: 22mm.
- Suitable for V.W.-Audi, Fiat, Ford, Nissan, Saab, Opel, Peugeot, Volvo, Renault, Toyota, Mercedes, etc.

KING TONY	A (mm)	min B (mm)	max B (mm)	C (mm)	D (mm)	E (mm)	g	
9BE21	160	12	50	20	22	32	1270	1 / 12



Drop Forged Coil Spring Compressor

9BF11

- Drop forged SCM435 jaws & leaded screws.
- Both 21m/m 6-point sockets and 1/2" wrench are available.
- Suitable design for use in limited space under wheel arch.

KING TONY	L (mm)	⬢ (mm)	g	
9BF11	85 / 370	19	3510	1 / 6

9BF21

- Drop forged SCM435 jaws & leaded screws.
- Both 21m/m 6-point sockets and 1/2"wrench are available.
- Suitable design for use in limited space under wheel arch.



KING TONY	L (mm)	⬢ (mm)	g	
9BF21	85 / 270	19	3360	1 / 6

8 PC. Coil Spring Compressor Set

9BF31 NEW

- Developed for "Macpherson" suspensions, using a range of 3 sets interchangeable monobloc forks
- Spring specification / use:
  A:φ80～115mm
  B:φ110～150mm
  C:φ140～195mm
- Suitable for : BMW、Ford、VW、Audi、Porsche、Saab、Opel、Volvo、Nissan、Honda、Mitsubishi、Subaru、Toyota





KING TONY	L (mm)	Capacity (mm)	kg	
9BF31	460	40~300	15	1 / 3

18 PC. Steering Wheel Puller Set

9BG11

With hex on the puller for easier to fix the puller.
With deep thread to make the bolt powerful to remove or install the pulley.

- Two pulling flange plates in one set.
- Small Plate Dia:
  1" to 3-11/16"(25 to 95mm)
- Large Plate Dia:
  1-1/8" to 5"(28 to 125mm)
- Bolt Size:
  3 PC. 5/16" UNC x 3- 1/2" long puller bolts
  3 PC. 5/16" UNF x 3" long puller bolts
  3 PC. 3/8" UNC x 3" long puller bolts
  3 PC. 3/8" UNF x 3" long puller bolts

KING TONY	g	
9BG11	4100	1 / 4

15 PC. Multi-steering Knuckle Spreader Tool Set

9BJ11 NEW

- This kit is used to spread the steering knuckle to enable the removal and fitting of shock absorbers without the risk of damaging the aluminum or cast iron knuckle.
- The tool is adjustable and suitable for steering knuckles with either a centralized slot or a non centralized slot.
- Wide range of vehicle applications.
- Designed for twin ball joints as fitted to Audi and VW control arms.
- Suitable for strut clamping bores on Audi、VW、BMW、Ford、Peugeot 、Citroen、Renault、Seat、Skoda.

KING TONY	kg	
9BJ11	1.05	1 / 10

Wheel Balancing Weight Tool

9BK11

- Ideal for wheel balance weights fitting and removing.

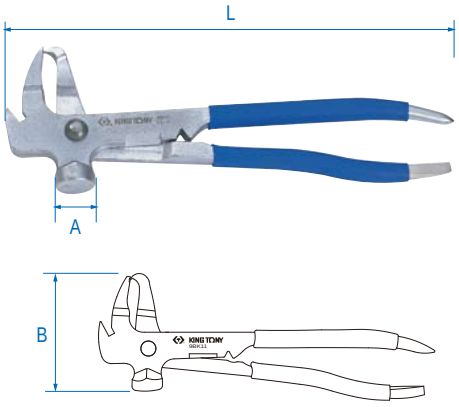

KING TONY	L (mm)	L (inch)	A (mm)	B (mm)	g	
9BK11	250	10	22	86	420	10 / 50

Tyre Lever

9BK41-53

- Professional quality, forged from CR-V steel.
- Straight pattern with profiled shank.

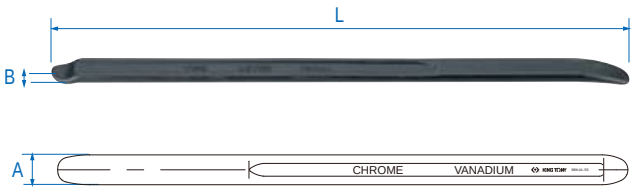

KING TONY	L (mm)	L (inch)	A (mm)	B (mm)	g	
9BK41-53	530	21	28	11	928	10 / 20

Lubrication-Grease Gun(Grip Type)

9BU1

- Ideal for machine, automobile, farm and garden equipments recreation vehicles etc.

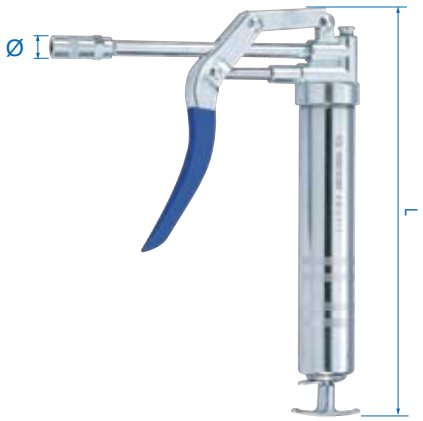

KING TONY	L (mm)	L (inch)	Ø (mm)	Ø (inch)	Working Pressure (psi)	Working Pressure (bar)	Burst Pressure		Bluk Loading (c.c.)	Bluk Loading (oz)	g	
9BU111	267	(10-5/8)	14	(9/16)	2900	(200)	4000	(275)	120	(3)	605	1 / 30
9BU112	267	(10-5/8)	14	(9/16)	2900	(200)	4000	(275)	120	(3)	605	1 / 30

9BU111 1/8" x 28 PT(for general market except North America,Germany, South Africa, Egypt)
9BU112 10 x 1.0 Mertric (for Germany, South Africa, Egypt, etc.)

9BU1T

- Ideal for machine, automobile, farm and garden equipments recreation vehicles etc.

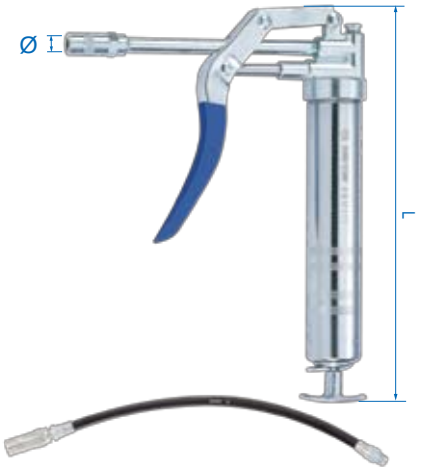

KING TONY	L (mm)	L (inch)	Ø (mm)	Ø (inch)	Working Pressure (psi)	Working Pressure (bar)	Burst Pressure		Bluk Loading (c.c.)	Bluk Loading (oz)	g	
9BU111T	267	(10-5/8)	14	(9/16)	2900	(200)	4000	(275)	120	(3)	677	1 / 30
9BU112T	267	(10-5/8)	14	(9/16)	2900	(200)	4000	(275)	120	(3)	677	1 / 30

9BU111 1/8" x 28 PT(for general market except North America,Germany, South Africa, Egypt)
9BU112 10 x 1.0 Mertric (for Germany, South Africa, Egypt, etc.)

Lubrication-Grease Gun(Lever Type)

9BU2

- Ideal for machine, automobile, farm and garden equipments recreation vehicles etc.

KING TONY	L (mm)	L (inch)	Ø (mm)	Ø (inch)	Working Pressure (psi)	Working Pressure (bar)	Burst Pressure		Bluk Loading (c.c.)	Bluk Loading (oz)	g	
9BU241	360	(14.5)	14	(9/16)	4500	(310)	10000	(700)	400	(14)	1180	1 / 16
9BU242	360	(14.5)	14	(9/16)	4500	(310)	10000	(700)	400	(14)	1180	1 / 16
9BU251	355	(14)	14	(9/16)	4500	(310)	10000	(700)	500	(16)	1518	1 / 16
9BU252	355	(14)	14	(9/16)	4500	(310)	10000	(700)	500	(16)	1518	1 / 16

9BU241 1/8" x 28 PT(for general market except North America,Germany, South Africa, Egypt)
9BU251 1/8" x 28 PT(for general market except North America,Germany, South Africa, Egypt)
9BU242 10 x 1.0 Mertric (for Germany, South Africa, Egypt, etc.)
9BU252 10 x 1.0 Mertric (for Germany, South Africa, Egypt, etc.)

Lubrication-Grease Gun with 12" Tube(Lever Type)

9BU2T

- Ideal for machine, automobile, farm and garden equipments recreation vehicles etc.

KING TONY	L (mm)	L (inch)	Ø (mm)	Ø (inch)	Working Pressure (psi)	Working Pressure (bar)	Burst Pressure		Bluk Loading (c.c.)	Bluk Loading (oz)	g	
9BU241T	360	(14.5)	14	(9/16)	4500	(310)	10000	(700)	400	(14)	1240	1 / 16
9BU242T	360	(14.5)	14	(9/16)	4500	(310)	10000	(700)	400	(14)	1240	1 / 16
9BU251T	355	(14)	14	(9/16)	4500	(310)	10000	(700)	500	(16)	1625	1 / 16
9BU252T	355	(14)	14	(9/16)	4500	(310)	10000	(700)	500	(16)	1625	1 / 16

9BU241T 1/8" x 28 PT(for general market except North America,Germany, South Africa, Egypt)
9BU251T 1/8" x 28 PT(for general market except North America,Germany, South Africa, Egypt)
9BU242T 10 x 1.0 Mertric (for Germany, South Africa, Egypt, etc.)
9BU252T 10 x 1.0 Mertric (for Germany, South Africa, Egypt, etc.)

Auto Body Repair Tool

9CF110

- 1PC. Standard Bumping Hammer

KING TONY	A (mm)	B (mm)	C (mm)	L (mm)	g	
9CF110	98.5	38	40.5	325	440	6 / 36

9CF120

- 1PC. Light Shrinking Hammer

KING TONY	A (mm)	B (mm)	C (mm)	L (mm)	g	
9CF120	98	40.6	39.6	325	467	6 / 36

9CF130

- 1PC. Straight Pick & Finishing Hammer

KING TONY	A (mm)	B (mm)	L (mm)	g	
9CF130	138	40	325	467	6 / 36

9CF131

- 1PC. Curved Pein & Finishing Hammer

KING TONY	A (mm)	B (mm)	L (mm)	g	
9CF131	140	40	325	467	6 / 36

9CF132 NEW

- 1PC. Curved Pein & Finishing Hammer

KING TONY	A (mm)	B (mm)	L (mm)	g	
9CF132	141	40	325	-	6 / 36

9CF210

- 1PC. Utility Dolly

KING TONY	A (mm)	B (mm)	L (mm)	g	
9CF210	69	64	42.3	1375	6 / 12



9CF220

- 1PC. Curved Dolly

KING TONY	A (mm)	B (mm)	L (mm)	g	
9CF220	58.6	45	133	1625	6 / 12



9CF230

- 1PC. Heel Dolly

KING TONY	A (mm)	B (mm)	L (mm)	g	
9CF230	60	30	79.3	1125	6 / 12

9CF240

- 1PC. Toe Dolly

KING TONY	A (mm)	B (mm)	L (mm)	g	
9CF240	58.5	29.1	121	1400	6 / 12



9CF241

- 1PC. Thin Toe Dolly

KING TONY	A (mm)	B (mm)	L (mm)	g	
9CF241	55	24	118	963	6 / 24

7PC. Auto Body Repair Tool Set

9CF-107
9CF-207
9CF-307

NEW

- All drop forged medium(SAE/AISI 1045,1055) carbon steel.
- Hammers are hardened and tempered, including 3 hardwood handled hammers and 4 dollies.

KING TONY	Contents			
9CF-107	9CF110	9CF120	9CF130	9CF240
9CF-207	9CF210	9CF220	9CF241	9CF131
9CF-307	9CF230			9CF132

9CF-107

9CF-207

9CF-307

KING TONY	g	
9CF-107	7500	1 / 4
9CF-207	7062	
9CF-307	7062	

3 PC. Stainless Steel Putty Knife Set

9CJ013

- 9CJ1112 1PC. 1-1/4" Putty Knife
- 9CJ1120 1PC. 2" Putty Knife
- 9CJ1130 1PC. 3" Putty Knife

KING TONY	g	
9CJ013	212	10 / 40

1-1/4" Putty Knife

9CJ1112

KING TONY	A		L		g	
	(mm)	(inch)	(mm)	(inch)		
9CJ1112	32	1-1/4	218	8-1/2	60	6 / 72

2" Putty Knife

9CJ1120

KING TONY	A		L		g	
	(mm)	(inch)	(mm)	(inch)		
9CJ1120	50	2	218	8-1/2	70	6 / 72

3" Putty Knife

9CJ1130

KING TONY	A		L		g	
	(mm)	(inch)	(mm)	(inch)		
9CJ1130	76	3	218	8-1/2	82	6 / 72

3 PC. Stainless Steel Bolstered Scraper Set

9CJ023

- 9CJ2112 1PC. 1-1/4" Bolstered Scraper
- 9CJ2212 1PC. 1-1/4" Bent Bolstered Scraper
- 9CJ2120 1PC. 2" Bolstered Scraper

KING TONY	g	
9CJ023	389	10 / 40

1-1/4" Bolstered Scraper

9CJ2112

KING TONY	A		L		g	
	(mm)	(inch)	(mm)	(inch)		
9CJ2112	32	1-1/4	218	8-1/2	120	6 / 72

1-1/4" Bent Bolstered Scraper

9CJ2212

KING TONY	A		L		g	
	(mm)	(inch)	(mm)	(inch)		
9CJ2212	32	1-1/4	218	8-1/2	120	6 / 72

2" Bolstered Scraper

9CJ2120

KING TONY	A		L		g	
	(mm)	(inch)	(mm)	(inch)		
9CJ2120	50	2	218	8-1/2	140	6 / 72

3 PC. Stainless Steel Pinchweld Scraper Set

9CJ033

- 9CJ3104 1PC. 1/2" Pinchweld Scraper
- 9CJ3105 1PC. 5/8" Pinchweld Scraper
- 9CJ3106 1PC. 3/4" Pinchweld Scraper

KING TONY	g	
9CJ033	258	10 / 40

1/2" Pinchweld Scraper

9CJ3104

KING TONY	A		L		g	
	(mm)	(inch)	(mm)	(inch)		
9CJ3104	12	1/2	168	6-1/2	75	6 / 72

5/8" Pinchweld Scraper

9CJ3105

KING TONY	A		L		g	
	(mm)	(inch)	(mm)	(inch)		
9CJ3105	15	5/8	218	8-1/2	108	6 / 72

3/4" Pinchweld Scraper

9CJ3106

KING TONY	A		L		g	
	(mm)	(inch)	(mm)	(inch)		
9CJ3106	19	3/4	168	6-1/2	75	6 / 72

Multi Purpose Single Edge Razor Scraper

9CJ61-40

- Ideal for scraping labels and decals.
- Comfortable TPR handle for maximum grip.
- Accepts all standard single edge razor blades.

KING TONY	A		L		g	
	(mm)	(inch)	(mm)	(inch)		
9CJ61-40	40	1-1/2	235	9	145	6 / 72

Spark Plug Boot Pliers

9DB201

- Safe remove spark plug cables and prevent cable damge.
- Pliers' handles and jaws are coated with a heavy-duty plastic for a sure grip.

KING TONY	L (mm)	Ø (mm)	L1 (mm)	g	
9DB201	260	14~18	20	266	12 / 48

Circuit Tester

9DC22

- Bronze body housing.
- Cover cap for contact needle
- Bulb of 24V/3W interchangeable.
- Test voltage 6~24V
- For application of D.C. circuits only.



KING TONY	L (mm)	Test Range	g	
9DC22	107	6~24V	50	20 / 200

Automotive Voltage Tester

9DC23

- Insulated alligator clip with 110 cm cable.
- 2 LEDs indicate positive(+)/negative(-) polarity.
- Test voltage 3~48V
- For application of D.C. circuits only.
- Two testing methods as illustration.

1.

2.

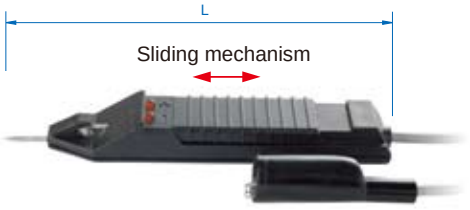





KING TONY	L (mm)	Test Range	g	
9DC23	138	3~48V	52	12 / 144

Fluorescent Lamp

9TA21A

- Wire Length : 33ft (10M)
- Euro.version : 220V 9W 12A

KING TONY	A (mm)	B (mm)	g	
9TA21A	310	55x45	1100	1 / 12

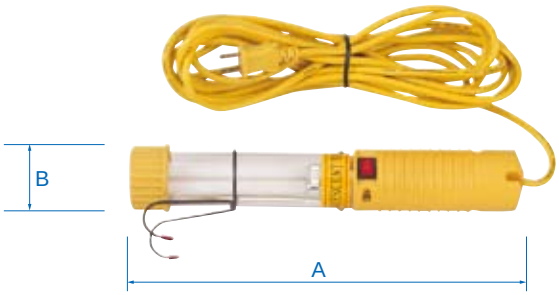

30+6LED Rechargeable Working Lamp

9TA23

- 30+6LED
- BRIGHTNESS:150 lux in 1m
- ANTI-IMPACT ABS HOUSING + TPR COATING
- RECHARGEABLE 3.6V 3300mAh NIMH BATTERY
- AC & DC CHARGERS INCLUDED
- SWIVEL NYLON HANGING HOOK PROVIDES 360DEGREES OF ROTATION FOR PRECISE POSITION
- WITH PROGRAMMED IC CHIP ON PCB FOR RELIABILITY
- BUILT-IN OVERLOAD/UNDERLOAD PROTECTION
- BATTERY POWER STATUS INDICATOR
- UP TO 6 HOURS OF CONTINUOUS LIGHTING
- EURO.VERSION:100-240V 50/60Hz
- CE/ROHS COMPLIANT
- I=6LED II=30LED

Contents:

1. 30+6LED RECHARGEABLE WORKING LAMP x 1PC.
2. AC ADAPTOR x 1PC.
3. DC CAR CHARGER x 1PC.

KING TONY	Charger	Suitable country	
9TA23A	CE	European & America & Asia	1 / 8

Optional Model of Charger :

CE UL

Roller Stud Extractor Socket

9TD401

- Turned by means of the hexagonal drive or a 1/2" - 12.7 mm ratchet which has a through-hole for a bar.
- For tightening or loosening studs.





KING TONY	○ mm	D1 (mm)	D2 (mm)	L (mm)	g	
9TD401-06M	6	24.5	21	60	150	10/180
9TD401-08M	8	24.5	21	60	150	10/180
9TD401-10M	10	27.5	21	69.5	190	12/120
9TD401-12M	12	27.5	21	69.5	190	12/120

4PC. Roller Stud Extractor Socket Set

9TD014MR

- Roller Stud Extractor Socket Set
- 4 stud drivers for sizes M6, M8, M10 and M12
- Supplied in a box

KING TONY	g	
9TD014MR	1100	1 / 8

Clip Removal Pliers

9TC101

- For removal of door inner-linings and other trim items held in place by plastic rivets.

KING TONY	L (mm)	L (inch)	g	
9TC101	230	9	241	12 / 72

15PC. 10-1/2" Heavy Duty Replaceable Tip Circlip Plier Set

45115PP

- Ideal for Internal-External circlip removing and replacment .
- Ratcheting locking action handles.

68GS-11 1PC. Internal Straight Circlip Pliers

68RS-11 1PC.External Straight Circlip Pliers

68GR-01 2PC. 15° Internal interchangeable

68GQ-01 2PC. 45° Internal interchangeable

68GB-01 2PC. 90° Internal interchangeable

68RR-01 2PC. 15° External interchangeable

68RQ-01 2PC. 45° External interchangeable

68RB-01 2PC. 90° External interchangeable

68ZZ-01 6PC. Screw(M5x0.8)

KING TONY	L (mm)	L (inch)	Spread (mm)	Spread (inch)	Ø (mm)	Ø (mm)	g	
45115PP	267	(10-1/2)	50	2"	-	-	1300	1 / 10
68GS-11	267	(10-1/2)	50	2"	85～100	3	314	12 / 24
68GR-11	267	(10-1/2)	50	2"	85～100	3	314	12 / 24
68GQ-11	267	(10-1/2)	50	2"	85～100	3	314	12 / 24
68GB-11	267	(10-1/2)	50	2"	85～100	3	314	12 / 24
68RS-11	267	(10-1/2)	50	2"	40～100	2.75	319	12 / 24
68RR-11	267	(10-1/2)	50	2"	40～100	2.75	319	12 / 24
68RQ-11	267	(10-1/2)	50	2"	40～100	2.75	319	12 / 24
68RB-11	267	(10-1/2)	50	2"	40～100	2.75	319	12 / 24



11PC. 16"Internal-External Heavy Duty Circlip Plier Set

45211PP

- Ideal for Internal-External circlip removing and replacment .
- Ratcheting locking action handles.

68GS-16 1PC. Internal Straight Circlip Pliers

68RS-16 1PC. External Straight Circlip Pliers

68GQ-02 2PC. 45° Internal interchangeable

68GB-02 2PC. 90° Internal interchangeable

68RQ-02 2PC. 45° External interchangeable

68RB-02 2PC. 90° External interchangeable

68ZZ-02 6PC. Screw(M6)

KING TONY	L (mm)	L (inch)	Spread (mm)	Spread (inch)	Ø (mm)	Ø (mm)	g	
45211PP	406	(16)	85	3-1/4"	-	-	3323	1 / 6
68GS-16	406	(16)	85	3-1/4"	82～175	3	931	1 / 12
68GQ-16	406	(16)	85	3-1/4"	82～175	3	931	1 / 12
68GB-16	406	(16)	85	3-1/4"	82～175	3	931	1 / 12
68RS-16	406	(16)	85	3-1/4"	82～165	3	973	1 / 12
68RQ-16	406	(16)	85	3-1/4"	82～165	3	973	1 / 12
68RB-16	406	(16)	85	3-1/4"	82～165	3	973	1 / 12



Magnetic Flexible Handle

2121

- Grip Material-PP+TPR.
- Enhanced flexible conduit for perfect shaping.
- More powerful magnetizing force.

For longer life, please don't shake or wave it.

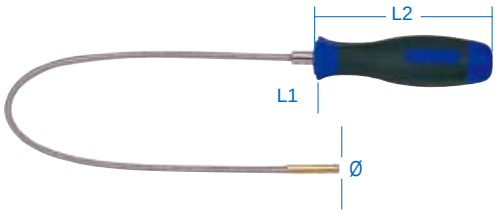

KING TONY	SIZE	Diax Length(mm) L1	L2	Magnetic power(kg)	g	
2121-12	12"	Ø 5x305	415	0.5	100	1 / 100
2121-18	18"	Ø 5x455	565	0.5	120	1 / 80

Magnet Pickup Tool

2124

- Compact and ergonomic design for comfortable holding.
- Enhanced flexible conduit for perfect shaping.
- Solid crimping for holding tube and flexible conduit.
- More powerful magnetizing force.
- Comfortable pushing strength.

For longer life, please don't shake or wave it.

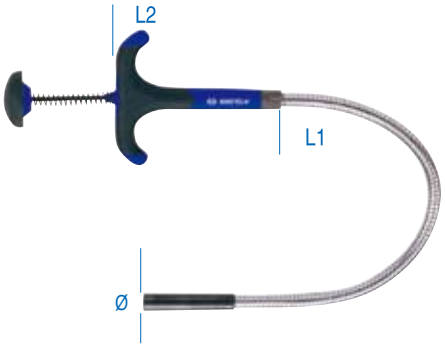

KING TONY	SIZE	Diax Length(mm) L1	L2	Magnetic power(kg)	g	
2124-13	13"	Ø 11x330	490	0.8	152	36
2124-18	18"	Ø 13.5x450	610	1.5	181	36

Claw Pickup Tool

2126

- Compact and ergonomic design for comfortable holding.
- Enhanced flexible conduit for perfect shaping.
- Solid crimping for holding tube and flexible conduit.
- Maximum claw width 1-1/4".
- Comfortable pushing strength.

For longer life, please don't shake or wave it.

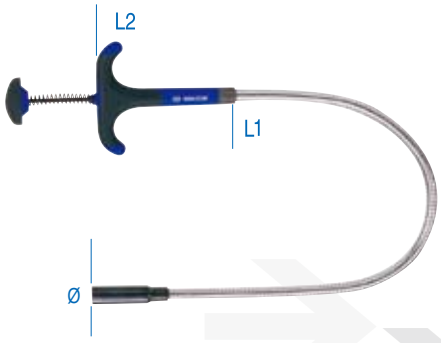

KING TONY	SIZE	Diax Length(mm) L1	L2	Maximum Size	g	
2126-18	18"	Ø 11x450	610	1-1/4"	181	36

Double size "L" handle

1586

- Material : Chrome vanadium alloy steel.
- For oil plug.

KING TONY	Total Length (inch)	Total Length (mm)	Size (inch)	Size (mm)	g	
1586-09	9	230	5/16 x 3/8	8 x 10	320	6 / 60

Door Upholstery Remover

43280212

KING TONY	SIZE	Shank Dia x Length (mm)	g	
43280212	5"	8 x 120		12 / 144

Pry Bar

9TK

- Chrome vanadium alloy steel
- PP+TPR handls
- Packaged in plastic tray
- Pry bars are for prying and levering
- Sturdy blade minimizing lever spring effect
- It's hardened and tempered for maximum durability

KING TONY	L (mm)	g	
9TK108	204	140.4	6 / 72
9TK112	312	286.0	6 / 48
9TK118	458	547.0	6 / 48
9TK124	608	677.2	6 / 36

4PC. Pry Bar Set

9TK014

- 9TK108 pry bar
- 9TK112 pry bar
- 9TK118 pry bar
- 9TK124 pry bar

KING TONY	kg	
9TK014	1.85	5 / 10

Round Magnetic Tool Holder

9TE11

- Stainless steel tray resists corrosion
- Can be used horizontally, vertically, and upside down
- Convenient for collecting small parts and tools

KING TONY	SIZE (mm)	g	
9TE11	Ø150	433	1 / 30

Wing Protector

9TP11

- Protection from unwanted scratches, dents and dirt
- Magnetic attachment keeps paintwork safe from damage
- Rugged, padded imitation leather and reinforced edges provide a perfect, cushioned working area

KING TONY	SIZE (mm)	g	
9TP11	1050x650	649	1 / 8

Safety Goggle

9CK-101

- Soft pvc frame & lens high impact clear polycarbonate.
- Anti-dust and anti-impact vents.

KING TONY	L1		L2		g	
	(mm)	(inch)	(mm)	(inch)		
9CK-101	74	2-7/8	153	6	70	20 / 200

Plastic Pressure Oil can

9TB225

KING TONY	Capacity C.C.	g	
9TB225	225	103	60

Index

10xxx

1005GQ -------- 242
1005ZQ -------- 242
1006PR -------- 241
1009PR ------- 241
1010PR ------- 241
1011MQ ------ 225
1015GQ -------- 242
1015MQ -------- 225
1015PQ ------- 225
1015ZQ ------- 242
1020-08 -------- 174
1020-09 -------- 174
1020-10 -------- 174
1020-11 -------- 174
1020-12 -------- 174
1020-13 -------- 174
1020-14 -------- 174
1020-15 -------- 174
1020-16 -------- 174
1020-17 -------- 174
1020-18 -------- 174
1020-19 -------- 174
102500P ------ 221
102500P.B --- 221
102500R ------ 222
102500R.B --- 222
102501P ------ 221
102501P.B --- 221
102501R ------ 222
102501R.B --- 222
102501Z ------ 222
102501Z.B --- 222
102502P ------ 221
102502P.B --- 221
102502H ------ 222
102502H.B --- 222
102502R ------ 222
102502R.B --- 222
102502Z ------ 222
102502Z.B --- 222
102503H ------ 222
102503H.B --- 222
102503P ------ 221
102503P.B --- 221
102503R ------- 222
102503R.B ---- 222
102503S1------ 222
102503S1.B--- 222
102503Z ------ 222
102503Z.B --- 222
102504H ------ 222
102504H.B --- 222
102504S1------ 222
102504S1.B--- 222
102504S2------ 222
102504S2.B--- 222
102505H ------- 222
102505H.B ---- 222
102505S1 ---- 222
102505S1.B - 222
102506H ------ 222
102506H.B --- 222
102506S1 -----222
102506S1.B --222
102506T -------222
102506T.B ----222
102507H ------222
102507H.B ---222
102507S1 -----222
102507S1.B --222
102507T -------222
102507T.B ----222
102507U ------222
102507U.B ---222
102508H--------222
102508H.B-----222
102508S1 -----222
102508S1.B --222
102508S2 -----222
102508S2.B --222
102508T -------222
102508T.B ----222
102508U--------222
102508U.B-----222
102508V--------222
102509T -------222
102509T.B ----222
102509U--------222
102509U.B-----222
102509V--------222
102510H--------222
102510H.B-----222
102510T -------222
102510T.B ----222
102510U--------222
102510U.B-----222
102510V--------222
102512P--------221
102512P.B -----221
102515H--------222
102515H.B-----222
102515T -------222
102515T.B ----222
102515U--------222
102515U.B-----222
102515V--------222
102520T--------222
102520T.B -----222
102520U--------222
102520U.B-----222
102520V--------222
102525H--------222
102525H.B-----222
102525T -------222
102525T.B ----222
102525U--------222
102525U.B-----222
102525V--------222
102527T -------222
102527T.B ----222
102527U--------222
102527U.T-----222
102527V--------222
102530T -------222
102530T.B ----222
102530U--------222
102530U.B ---- 222
102530V ------- 222
102535S1------ 222
102535S1.B--- 222
102540T ------ 222
102540T.B ---- 222
102540U ------- 222
102540U.B ---- 222
102540V ------- 222
102545S1------ 222
102545S1.B--- 222
102555S1 ---- 222
102555S1.B - 222
102555S2 ---- 222
102555S2.B - 222
102565S1 ---- 222
102565S1.B - 222
1032CQ -------- 227
1044CQ -------- 225
1050CQ -------- 227
1060-06 -------- 167
1060-07 -------- 167
1060-08 -------- 167
1060-09 -------- 167
1060-10 -------- 167
1060-11--------- 167
1060-12 -------- 167
1060-13 -------- 167
1060-14 -------- 167
1060-15 -------- 167
1060-16 -------- 167
1060-17 -------- 167
1060-18 -------- 167
1060-19 -------- 167
1060-20 -------- 167
1060-21 -------- 167
1060-22 -------- 167
1060-23 -------- 167
1060-24 -------- 167
1060-25 -------- 167
1060-26 -------- 167
1060-27 -------- 167
1060-28 -------- 167
1060-29 -------- 167
1060-30 -------- 167
1060-32 -------- 167
1060-55 -------- 167
1071-33 -------- 167
1071-34 -------- 167
1071-35 -------- 167
1071-36 -------- 167
1071-38 -------- 167
1071-41 -------- 167
1071-42 -------- 167
1071-44 -------- 167
1071-46 -------- 167
1071-48 -------- 167
1071-50 -------- 167
1080-06 ------- 184
1080-07 ------- 184
1080-08 ------- 184
1080-09 ------- 184
1080-10 ------- 184
1080-11 ------- 184
1080-12 -------184
1080-13 -------184
1080-14 -------184
1080-15 -------184
1080-16 -------184
1080-17 -------184
1080-18 -------184
1080-19 -------184
1080-20 -------184
1080-21 -------184
1080-22 -------184
1080-23---------184
1080-24 -------184
1080-25 -------184
1080-26 -------184
1080-27 -------184
1080-28 -------184
1080-29 -------184
1080-30---------184
1080-32 -------184
1081-06 -------185
1081-07 -------185
1081-08 -------185
1081-09 -------185
1081-10 -------185
1081-11 --------185
1081-12 -------185
1081-13 -------185
1081-14 -------185
1081-15 -------185
1081-16 -------185
1081-17---------185
1081-18 -------185
1081-19 -------185
1081-20 -------185
1081-21 -------185
1081-22 -------185
1081-23 -------185
1081-24 -------185
1081-25 -------185
1081-26 -------185
1081-27 -------185
1081-28 -------185
1081-29 -------185
1081-30 -------185
1081-32---------185
1084-08---------186
1084-09---------186
1084-10---------186
1084-11 ---------186
1084-12---------186
1084-13---------186
1084-14---------186
1084-15---------186
1084-16---------186
1084-17---------186
1084-18---------186
1084-19---------186
1090PR1 -------242
10A0-24---------175
10A0-27---------175
10A0-30---------175
10A0-32---------175
10A0-36---------175
10A0-41 -------- 175
10A0-46 -------- 175
10A0-50 -------- 175
10A0-55 -------- 175
10A0-60 -------- 175
10A0-65 -------- 175
10A0-70 -------- 175
10A0-75 -------- 175
10A0-80 -------- 175
10A0-85 -------- 175
10A0-90 -------- 175
10A0-95 -------- 175
10A0-100 ------ 175
10A0-105 ------ 175
10A0-110------- 175
10A0-115------- 175
10A0-120 ------ 175
10B0-24 -------- 176
10B0-27 -------- 176
10B0-30 -------- 176
10B0-32 -------- 176
10B0-36 -------- 176
10B0-41 -------- 176
10B0-46 -------- 176
10B0-50 -------- 176
10B0-55 -------- 176
10B0-60 -------- 176
10B0-65 -------- 176
10B0-70 -------- 176
10B0-75 -------- 176
10B0-80 -------- 176
10B0-85 -------- 176
10B0-90 -------- 176
10B0-95 -------- 176
10B0-100 ------ 176
10B0-105 ------ 176
10B0-110------- 176
10B0-115------- 176
10B0-120 ------ 176
10C0-24 -------- 176
10C0-27 -------- 176
10C0-30 -------- 176
10C0-32 -------- 176
10C0-36 -------- 176
10C0-41 -------- 176
10C0-46 -------- 176
10C0-50 -------- 176
10C0-55 -------- 176
10C0-60 -------- 176
10C0-65 -------- 176
10D0-10 -------- 167
10D0-11 -------- 167
10D0-12 -------- 167
10D0-13 -------- 167
10D0-14 -------- 167
10D0-15 -------- 167
10D0-16 -------- 167
10D0-17 -------- 167
10D0-18 -------- 167
10D0-19 -------- 167

11xxx

1108MR ------- 169
1108SR --------- 169
11104PR ------243
11104PR10 ---243
1110MR ---------169
1110SR --------169
1112MR ---------169
1112SR --------169
111946 ----------176
112002M ------234
112003M ------234
112004M ------234
112005M ------234
112006M ------234
112007M ------234
112008M ------234
112010M ------234
112015M ------234
112025M--------234
11205SQ ------243
112261 ----------176
112310 ----------235
112315 ----------235
112320 ----------235
112325 ----------235
112327 ----------235
112330 ----------235
112340 ----------235
112345 ----------235
112350 ----------235
112502M ------232
112503M ------232
112504M ------232
112504S --------232
112505M ------232
112505S --------232
112506M ------232
112506S --------232
112507M ------232
112508M ------232
112508S --------232
112510M ------232
112510S --------232
112512M ------232
112512S --------232
112514M ------232
112516S --------232
112517M ------232
112518S --------232
112519M ------232
112522M--------232
112576 ----------176
112605M--------232
112606M--------232
112608M--------232
112610M--------232
112612M--------232
112710 ----------235
112715 ----------235
112720 ----------235
112725 ----------235
112727 ----------235
112730 ----------235
112740 ----------235
112745 ----------235
112750 ----------235

Index

113002M ----- 234
113003M ----- 234
113003S ------- 234
113004M ------- 234
113004S ------- 234
113005M ------- 234
113005S ------- 234
113006M ------- 234
113006S ------- 234
113007S ------- 234
113008M ------- 234
113008S ------- 234
113010M ------- 234
113010S ------- 234
113012S ------- 234
113015M ------- 234
113025M ------- 234
113086 --------- 176
114310 --------- 235
114315 --------- 235
114320 --------- 235
114325 --------- 235
114327 --------- 235
114330 --------- 235
114340 --------- 235
114345 --------- 235
114350 --------- 235
114502M ------- 232
114503M ------- 232
114504M ------- 232
114505M ------- 232
114506M ------- 232
114507M ------- 232
114508M ------- 232
114510M ------- 232
114515M ------- 232
114525M ------- 232
114555M ------- 232
114605M ------- 232
114606M ------- 232
114608M ------- 232
114610M ------- 232
114612M ------- 232
114710 --------- 235
114715 --------- 235
114720 --------- 235
114725 --------- 235
114727 --------- 235
114730 --------- 235
114740 --------- 235
114745 --------- 235
114750 --------- 235
115002M ------- 239
115003M ------- 239
115004M ------- 239
115005M ------- 239
115006M ------- 239
115008M ------- 239
115010M ------- 239
115025M ------- 239
115310 --------- 239
115315 --------- 239
115320 --------- 239
115325 --------- 239
115327 ---------239
115330 ---------239
115340 ---------239
115345 ---------239
115350 ---------239
115502M--------239
115503M--------239
115504M--------239
115505M--------239
115506M--------239
115508M--------239
115510M--------239
115525M--------239
116002M--------237
116003M--------237
116004M--------237
116005M--------237
116006M--------237
116007M--------237
116008M--------237
116010M--------237
116025M--------237
116310 ---------237
116315 ---------237
116320 ---------237
116325 ---------237
116327 ---------237
116330 ---------237
116340 ---------237
116345 ---------237
116350 ---------237
116502M--------237
116525M--------237
116503M--------237
116504M--------237
116505M--------237
116506M--------237
116507M--------237
116508M--------237
116510M--------237
118406M--------188
118407M--------188
118408M--------188
118409M--------188
118410M--------188
118411M--------188
118412M--------188
118413M--------188
118414M--------188
118417M--------188
118508M--------189
118509M--------189
118510M--------189
118511M ------189
118512M ------189
118513M ------189
118514M ------189
118517M ------189
118519M--------189

12xxx

1207MR---------168
1207SR --------168
1208MR---------168
12107MR ----- 181
1210MR -------- 168
12112MR------- 181
12114MR------- 182
1211MR -------- 168
1211SR--------- 168
1211SR01 ----- 168
1212MR -------- 168
1214MR -------- 168
1214MR01----- 168
1214SR--------- 168
1214SR01 ----- 168
1215MR -------- 168
1215MR01----- 168
1216SR--------- 168
1218MR01----- 168
12207MR ------ 181
12212MR ----- 181
12214MR ----- 182
1226MR -------- 168
12706MR ------ 182
12709MR ------ 182

13xxx

13012MR ----- 182
13013MR ----- 183
1306MR ------- 174
1306SR ------- 174
131101P ------ 229
131102P ------ 229
131103P ------ 229
13113MR ----- 183
131501P ------ 229
131502P ------ 229
131503P ------ 229
1317012PN---- 216
1317012ZN---- 216
1317046SN---- 216
1317057SN---- 216
1317115TN ---- 216
1317225TN---- 216
1317340TN---- 216
1317401PN---- 216
131744BHN --- 216
1317501ZN---- 216
131755BHN --- 216
1317602PN---- 216
131766BHN --- 216
1317702ZN---- 216
13213MR ----- 183
134501P ------- 229
134502P ------ 229
134503P ------ 229
1360012P------ 223
1360012Z------ 223
1360022P------ 223
1360022Z------ 223
1360023P------ 223
1360023Z------ 223
1360451P------ 223
1360451Z------ 223
1360552P------ 223
1360552Z------ 223
1360703P------ 223
1360703Z ------223
136501P ------229
136502P ------229
136503P ------229

14xxx

14103GP ------142
14108SR -------182
14111MR -------182
14110003-------210
14110104-------210
14110204-------210
14110204-E*---210
14110205-E* -210
14110206-------210
14110206-E* -210
14110208-E* -210
14110214-------210
14110306-------210
14110308-------210
14120303-------210
14120404-------210
14120806-------210
14120808-------210
14125504-------210
14126504-------210
14126504-E* --210
14126506-------210
14126506-E* --210
14126514-------210
14210023-------211
14210104-------211
14210112-------211
14210116-------211
14210132-------211
14210204-------211
14210206-------211
14210212-------211
14210214-------211
14210216-------211
14210306-------211
14220303-------211
14220404-------211
14220503-------211
14220504-------211
14220512-------211
14220516-------211
14220806-------211
14220807-------211
14220808-------211
14225503-------211
14225504-------211
14225505-------211
14225506-------211
14226504-------211
14226506-------211
14226512-------211
14226514-------211
14226516-------211
14230803-------212
14230903-------212
14231003-------212
14231503-------212
14232004-------212
14232504 ------ 212
14232704 ------ 212
14233005 ------ 212
14234006 ------ 212
14240105 ------ 212
14240206 ------ 212
14270803 ------ 212
14270903 ------ 212
14271003 ------ 212
14271503 ------ 212
14272004 ------ 212
14272504 ------ 212
14272704 ------ 212
14273005 ------ 212
14274006 ------ 212
14280023 ------ 212
14280104 ------ 212
14280132 ------ 212
14280204 ------ 212
14280306 ------ 212
14311003 ------ 219
14311015 ------ 219
14311103------- 219
14311115------- 219
14312003 ------ 219
14312015 ------ 219
14313003 ------ 219
14313015 ------ 219
14320615 ------ 219
14320815 ------ 219
14321003 ------ 219
14321015 ------ 219
14321503 ------ 219
14321515 ------ 219
14321803 ------ 219
14321815 ------ 219
14322003 ------ 219
14322015 ------ 219
14322503 ------ 219
14322515 ------ 219
14323003 ------ 219
14323015 ------ 219
14323503 ------ 219
14323515 ------ 219
14324003 ------ 219
14324015 ------ 219
14330403 ------ 219
14330415 ------ 219
14330503 ------ 219
14330515 ------ 219
14330603 ------ 219
14330615 ------ 219
14330703 ------ 219
14330715 ------ 219
14320803 ------ 219
14330815 ------ 219
14330902 ------ 219
14330903 ------ 219
14331002 ------ 219
14331003 ------ 219
14331502 ------ 219
14331503 ------ 219
14332002 ------ 219
14332003 ------ 219
1450-04 ---------216
1450-05 ---------216
1450-06 ---------216
1450-07 ---------216
1450-08 ---------216
1450-09 ---------216
1450-10 ---------216
1450-11 ---------216
1450-12 ---------216
1450-13 ---------216
1450-45 ---------216
1450-55 ---------216
14610103-------215
14610204-------215
14610306-------215
14620807-------215
14625504-------215
14626504-------215
14626506-------215
14710003-------218
14710104-------218
14710204-------218
14710306-------218
14720303-------218
14720404-------218
14720807-------218
14725505-------218
14726506-------218
14780003-------218
14780104-------218
14780204-------218
14780306-------218
14810103-------214
14810204-------214
14810204-E* --214
14810205-------214
14810205-E* --214
14810306-------214
14810412-------214
14825503-------214
14826504-------214
14826504-E* --214
14826506-------214
14826505-E* -214
14820806-------214
14821012-------214

15xxx

151001P --------229
151002P --------229
151003P --------229
151501P --------229
151502P --------229
151503P --------229
155001P --------229
155002P --------229
155003P --------229
15631612-------189
15631615-------189
15631618-------189
15632112-------189
15632115-------189
15632118-------189
15661612-------190

15661615 ------ 190
15661618 ------ 190
15662112 ------ 190
15662115 ------ 190
15662118 ------ 190
157501P ------- 229
157502P ------- 229
157503P ------- 229
1586-09 -------- 275

16xxx

1606MR -------- 170
1609MR -------- 170
163604H ------- 224
163605H ------- 224
163605M ------- 224
163606H ------- 224
163606M ------- 224
163607H ------- 224
163608H ------- 224
163608M ------- 224
163610H ------- 224
163610M ------- 224
163610T ------ 224
163610U ------- 224
163612H ------- 224
163612M ------- 224
163615T ------ 224
163615U ------- 224
163620T ------ 224
163620U ------- 224
163625T ------ 224
163625U ------- 224
163627T ------ 224
163627U ------- 224
163630T ------ 224
163630U ------- 224
163640T ------ 224
163640U ------- 224
163645T ------ 224
163645U ------- 224
163650T ------ 224
163650U ------- 224
163655T ------ 224
163655U ------- 224
163660T ------ 224
163660U ------- 224
168004H ------- 224
168005H ------- 224
168005M ------- 224
168006H ------- 224
168006M ------- 224
168007H ------- 224
168008H ------- 224
168008M ------- 224
168010H ------- 224
168010M ------- 224
168010T ------- 224
168010U ------- 224
168012H ------- 224
168012M ------- 224
168015T ------ 224
168015U ------- 224
168020T ------ 224
168020U -------- 224
168025T ------- 224
168025U -------- 224
168027T ------- 224
168027U -------- 224
168030T ------- 224
168030U -------- 224
168040T ------- 224
168040U -------- 224
168045T ------- 224
168045U -------- 224
168050T ------- 224
168050U -------- 224
168055T ------- 224
168055U -------- 224
168060T ------- 224
168060U -------- 224

17xxx

1706MR --------- 171
1707SR -------- 171
1708MR --------- 171
1710MR --------- 171
1712MR --------- 171
174010H -------- 126
174012H -------- 126
174014H -------- 126
174017H -------- 126
174019H -------- 126
174022H -------- 126

18xxx

1805MR --------- 184
1808MR --------- 184
1812MR --------- 184
181202P ------ 223
181203P ------ 223
1826MR --------- 184
183215T -------- 223
183220T -------- 223
183225T -------- 223
183227T -------- 223
183230T -------- 223
183240T -------- 223
183245T -------- 223
183250T -------- 223
183602P ------ 223
183603P ------ 223
183604P ------ 223
183608S ------ 223
183609S ------ 223
183610S ------ 223
183611S ------ 223
183612S ------ 223
187015T ------- 223
187020T ------- 223
187025T ------- 223
187027T ------- 223
187030T -------- 223
187040T ------- 223
187045T -------- 223
187050T -------- 223
188002P ------ 223
188003P ------ 223
188004P ------ 223
188008S ------ 223
188010S ------ 223
188012S ------- 223

19xxx

19000607 ------ 169
19000708 ------ 169
19000809 ------ 169
19000810 ------ 169
19000911 ------ 169
19001011 ------ 169
19001012 ------ 169
19001113 ------ 169
19001213 ------ 169
19001214 ------ 169
19001314 ------ 169
19001317 ------ 169
19001415 ------ 169
19001417 ------ 169
19001617 ------ 169
19001618 ------ 169
19001719 ------ 169
19001819 ------ 169
19001921 ------ 169
19001922 ------ 169
19002022 ------ 169
19002123 ------ 169
19002224 ------ 169
19002326 ------ 169
19002426 ------ 169
19002427 ------ 169
19002528 ------ 169
19002632 ------ 169
19002730 ------ 169
19002732 ------ 169
19003032 ------ 169
19005507 ------ 169
19100607 ------ 175
19100809 ------ 175
19100810 ------ 175
19101011 ------ 175
19101012 ------ 175
19101213 ------ 175
19101214 ------ 175
19101415 ------ 175
19101617 ------ 175
19101819 ------ 175
19102022 ------ 175
19102123 ------ 175
19102427 ------ 175
1912MR -------- 185
19200608 ------ 173
19200711 ------ 173
19201012 ------ 173
19201418 ------ 173
19201622 ------ 173
19202024 ------ 173
1926MR -------- 185
19300810 ------ 173
19300911 ------ 173
19301011 ------ 173
19301012 ------ 173
19301113 ------ 173
19301213 ------ 173
19301214 -------173
19301417 -------173
19301719 -------173
19301922 -------173
19312224 -------174
19312427 -------174
19313032 -------174
19500810 -------173
19501012 -------173
19501113 -------173
19501214 -------173
19501315 -------173
19501417 -------173
19501618 -------173
19501719 -------173
19501922 -------173
195419H ------- P36
195422H ------- P36
195424H ------- P36
195427H ------- P36
195432H ------- P36
19600607 -------170
19600809 -------170
19600810 -------170
19601012 -------170
19601113 -------170
19601214 -------170
19601417 -------170
19601719 -------170
19601921 -------170
19602224 -------170
19602326 -------170
19602427 -------170
19602732 -------170
19603032 -------170
19700607 -------171
19700809 -------171
19700810 -------171
19701011 -------171
19701012 -------171
19701113 -------171
19701213 -------171
19701214 -------171
19701314 -------171
19701415 -------171
19701417 -------171
19701617 -------171
19701719 -------171
19701819 -------171
19701921 -------171
19702022 -------171
19702123 -------171
19702224 -------171
19702326 -------171
19702426 -------171
19702427 -------171
19702528 -------171
19703032 -------171
199104R -------188
19911722 -------188
19932427 -------188
19961721 -------187
19A00607 ------177
19A00809 ------177
19A01011 ------ 177
19A01213 ------ 177
19A01415 ------ 177
19A01617 ------ 177
19A01819 ------ 177
19A02022 ------ 177
19A02123 ------ 177
19A02426 ------ 177
19A02528 ------ 177
19A02729 ------ 177
19A03032 ------ 177
19A0-09 -------- 177
19A0-15 -------- 177
19C00607 ------ 172
19C00809 ------ 172
19C01011 ------ 172
19C01213 ------ 172
19C01415 ------ 172
19C01617 ------ 172
19C01819 ------ 172
19C02022 ------ 172
19C02123 ------ 172
19C02426 ------ 172
19C02528 ------ 172
19C03032 ------ 172

1A/1B/1Cxx

1A06MR -------- 175
1B06MR -------- 174
1C08MR -------- 172
1C12MR -------- 172

20xxx

20107MR01 --- 234
20107SR ------- 234
20108MR ------ 234
20109MR ------ 234
2019MR --------46
2019SR----------46
20208MR ------ 233
20208MR01 --- 233
20208SR01---- 233
20209MR ------ 233
2021MR ----------46
20210MR ------ 233
20218MR ------ 233
20219MR ------ 233
2030CR ----------47
20306PR ------- 231
20307PR ----- 236
20308PR ----- 236
20309PR ----- 236
2031MR ----------47
203101----------41
203102----------41
203103----------41
203104----------41
20317PR ------- 231
20319PR ----- 236
203204----------41
203208----------41
203210----------41
203235----------41
203255----------41
203265----------41
203308 ---------- 41
203309 ---------- 41
203310 ---------- 41
203315 ---------- 41
203320 ---------- 41
203325 ---------- 41
203327 ---------- 41
203330 ---------- 41
203340 ---------- 41
203503 ---------- 41
203504 ---------- 41
203505 ---------- 41
203506 ---------- 41
203507 ---------- 41
203508 ---------- 41
203510 ---------- 41
203708 ---------- 41
203709 ---------- 41
203710 ---------- 41
203715 ---------- 41
203720 ---------- 41
203725 ---------- 41
203727 ---------- 41
203730 ---------- 41
203740 ---------- 41
20407PR --------236
20409PR --------237
20419PR --------237
20505PR --------233
20515PR --------233
20A16MR -------231
20A17MR -------231

21xxx

21108MR -------239
21-20-07MR ---247
21-20-101 ------246
21-20-102 ------246
21208MR -------239
2121-12 ---------274
2121-18 ---------274
2124-13 ---------274
2124-18 ---------274
2126-18 ---------274
2127PR ---------- 50
21309PR --------239
213312DF ------- 45
2138PR --------228
2177DF ---------- 45
2178AE ---------- 45
2178DF ---------- 45

22xxx

22106MR -------238
22108MR -------238
22118MR -------238
22208MR -------238
22218MR -------238
2221-02 ---------- 44
2221-03 ---------- 44
2221-04 ---------- 44
2221-06 ---------- 44
2221-10 ---------- 44
2221-12 ---------- 44
2223-02 ---------- 44

Index

2223-04 ---------- 44
22306PR ------- 238
22309PR ------- 238
22319PR ------- 238
223504M --------- 40
223505M --------- 40
223505S --------- 40
223506M --------- 40
223506S --------- 40
223507M --------- 40
223507S --------- 40
223508M --------- 40
223508S --------- 40
223509M --------- 40
223509S --------- 40
223510M --------- 40
223510S --------- 40
223511M --------- 40
223511S --------- 40
223512M ------- 40
223512S --------- 40
223513M --------- 40
223514M ------- 40
223514S --------- 40
223516S ------- 40
223545M --------- 40
223555M --------- 40
227504M --------- 41
227505M --------- 41
227506M --------- 41
227507M --------- 41
227508M --------- 41
2293-02 ---------- 44
2293-04 ---------- 44
2293-06 ---------- 44

23xxx

231008M ------- 40
231010M ------- 40
231010S --------- 40
231012S --------- 40
2311-06 ---------- 44
2311-12 ---------- 44
2311-18 ---------- 44
233004M ------- 39
233005M ------- 39
233005S ------- 39
233006M ------- 39
233006S ------- 39
233007M ------- 39
233007S ------- 39
233008M ------- 39
233008S ------- 39
233009M ------- 39
233009S ------- 39
233010M ------- 39
233010S ------- 39
233011M ------ 39
233011S ------- 39
233012M ------- 39
233012S ------- 39
233013M ------- 39
233014M ------- 39
233014S ------- 39
233015S ------- 39
233016S ------- 39
233045M -------- 39
233055M ------- 39
233504M ------- 39
233505M ------- 39
233505S --------- 39
233506M ------- 39
233506S --------- 39
233507M ------- 39
233507S --------- 39
233508M -------- 39
233508S --------- 39
233509M ------- 39
233509S --------- 39
233510M ------- 39
233510S --------- 39
233511M --------- 39
233511S --------- 39
233512M ------- 39
233512S --------- 39
233513M ------- 39
233514M ------- 39
233514S --------- 39
233515S --------- 39
233516S --------- 39
233532M -------- 39
233545M ------- 39
233555M -------- 39
237504M ------- 40
237505M ------- 40
237506M ------- 40
237507M ------- 40
237508M -------- 40

24xxx

24110204 ------- 210
24110214 ------- 210
24311030 ------ 220
24311140 ------ 220
24312020 ------ 220
24330610 ------ 220
24330715 ------ 220
24330820 ------ 220
24330915 ------ 220
2452-05F -------- 45
2452DK ---------- 45

25xxx

2509MR -------- 50
2509SR ---------- 50
2510SR ---------- 46
2511MR -------- 46
2516MR---------- 46
2516SR ---------- 46
2517MR---------- 227
2519MR---------- 46
2519SR ---------- 46
2521MR---------- 46
2526CR ---------- 48
2526MR---------- 47
2526SR ---------- 47
2530CR ---------- 47
2531MR---------- 47
253504M -------- 103
253505M -------- 103
253506M -------- 103
253507M -------- 103
253508M -------- 103
253509M -------- 103
253510M -------- 103
253511M -------- 103
253512M -------- 103
253513M -------- 103
253514M -------- 103
253545M -------- 103
253555M -------- 103
2539MR ---------- 48
2540MR ---------- 48
2551MR ---------- 49
2571-45 ---------- 45
2575MR ---------- 49

27xxx

2755-55G ------- 42
2755DK---------- 42
2760-04 ---------- 42
2760DK---------- 42
2761-55F--------- 42
2761-55P --------- 42
2761DK---------- 42
2769-55F--------- 42
2769-55P --------- 42
2769DK---------- 42
2771-55F--------- 43
2771-55G ------- 43
2771DK---------- 43
2779-55F--------- 43
2779-55G --------- 43
2779DK---------- 43
2781-06F--------- 43
2781-06P --------- 43
2781DK---------- 43
2789-06F--------- 43
2789-06P --------- 43
2789DK---------- 43
2792---------- 44

28xxx

2813---------- 44

30xxx

3007MR01------- 61
30115MR------- 213
30117MR------- 213
30118MR------- 213
30127MR ------ 213
3013MR ---------- 62
3013SR---------- 62
30206MR ------ 215
3020MR02------- 63
3020SR02 ------- 63
302102 ---------- 55
302103 ---------- 55
302104 ---------- 55
302205 ---------- 55
302208 ---------- 55
302210 ---------- 55
302308 ---------- 55
302309 ---------- 55
302310 ---------- 55
302315 ---------- 55
302320 ---------- 55
302325 ---------- 55
302327 ---------- 55
302330 ---------- 55
302340 ---------- 55
302345 ---------- 55
302350 ---------- 55
3023MR---------- 63
3023MR04 ------ 63
3024MR---------- 64
3024SR ---------- 64
302503 ---------- 55
302504 ---------- 55
302505 ---------- 55
302506 ---------- 55
302507 ---------- 55
302508 ---------- 55
302510 ---------- 55
302512 ---------- 55
302708 ---------- 56
302709 ---------- 56
302710 ---------- 56
302715 ---------- 56
302720 ---------- 56
302725 ---------- 56
302727 ---------- 56
302730 ---------- 56
302740 ---------- 56
302745 ---------- 56
302750 ---------- 56
3027MR---------- 64
3027SR ---------- 64
30307PR -------213
30309PR -------213
30317PR -------213
30319PR -------213
3034MR---------- 65
3036CR ---------- 65
303904 ---------- 56
303905 ---------- 56
303906 ---------- 56
303907 ---------- 56
303908 ---------- 56
303909 ---------- 56
303910 ---------- 56
3050MR---------- 65
305310----------105
305315----------105
305320----------105
305325----------105
305327----------105
305330----------105
305340----------105
305345----------105
305350----------105
305504M -------105
305505M -------105
305506M -------105
305506S --------105
305507S --------105
305508M -------105
305508S --------105
305510M -------105
305510S -------105
305512M -------105
305512S -------105
305516S -------105
30607MR ------ 218
30617MR ------ 218
306504---------- 105
306505---------- 105
306506---------- 105
306508---------- 105
306510---------- 105

31xxx

3103PR----------61
3105PR----------62
3106PR----------62
31116MR ------- 213
3113PR----------61
3116PR----------62
31216MR ------ 213
31416MR ------ 209
31416MR-A --- 209
31416MR-D --- 209
31419MR ------ 221
314708S ------- 106
314710M ------- 106
314710S ------- 106
314808S ---------60
314810S ---------60
314810M ---------60
3116PR----------62
31512MR ------ 209
31512MR01 --- 209
31512MR-A --- 209
31512MR-D --- 209
31516MR ------ 209
31516MR-A --- 209
31516MR-D --- 209
31519MR ------ 209
31519MR-A --- 209
31519MR-D --- 209

32xxx

3203 ---------- 187
3203A0 --------- 187
3204 ---------- 187
32108MR ------ 221
32118MR ------- 221
32209MR ------ 221
3221-03 ---------59
3221-06 ---------59
3221-10 ---------59
3221-16 ---------59
3221-18 ---------59
3221-24 ---------59
3223-03 ---------59
3223-06 ---------59
3223-10 ---------59
32218MR ------ 221
323007M ---------52
323008M ---------52
323009M ---------52
323010M ---------52
323010S ---------52
323011M --------- 52
323012M --------- 52
323012S --------- 52
323013M --------- 52
323014M --------- 52
323014S --------- 52
323015M --------- 52
323016M --------- 52
323016S --------- 52
323017M --------- 52
323018M --------- 52
323018S --------- 52
323019M --------- 52
323020S --------- 52
323021M --------- 52
323022M --------- 52
323022S --------- 52
323024M --------- 52
323024S --------- 52
323026S --------- 52
32309PR--------221
323507M --------- 53
323508M --------- 53
323509M --------- 53
323510M --------- 53
323510S --------- 53
323511M --------- 53
323512M --------- 53
323512S --------- 53
323513M --------- 53
323514M --------- 53
323514S --------- 53
323515M --------- 53
323516M --------- 53
323516S --------- 53
323517M --------- 53
323518M --------- 53
323518S --------- 53
323519M --------- 53
323520S --------- 53
323521M --------- 53
323522M --------- 53
323522S --------- 53
323524M --------- 53
323524S --------- 53
323526S --------- 53
32518MR -------217
32518MR01----217
32518MR02----217
3260-03 ---------106
3260-03P -------106
3260-06 ---------106
3260-06P ------106
32607MR -------221
327504M --------- 53
327505M --------- 53
327506M --------- 53
327507M --------- 53
327508M --------- 53
327510M --------- 53
327511M --------- 53
327512M --------- 53
327514M --------- 53
327516M --------- 53

Index

327518M--------- 53
32810MR ------ 226
3293-03 ---------- 59
3293-06 ---------- 59
3293-10 ---------- 59

33xxx

3311-06 --------- 59
3311-12 --------- 59
33111 ---------- 151
333006M--------- 51
333007M--------- 51
333008M--------- 51
333008S --------- 51
333009M--------- 51
333010M--------- 51
333010S --------- 51
333011M--------- 51
333011S --------- 51
333012M--------- 51
333012S --------- 51
333013M--------- 51
333014M--------- 51
333014S --------- 51
333015M--------- 51
333015S --------- 51
333016M--------- 51
333016S --------- 51
333017M--------- 51
333018M--------- 51
333018S --------- 51
333019M--------- 51
333019S --------- 51
333020M--------- 51
333020S --------- 51
333021M--------- 51
333022M--------- 51
333022S --------- 51
333024M--------- 51
333024S --------- 51
333026S --------- 51
333028S --------- 51
33311-020 ----- 141
333506M--------- 51
333507M--------- 51
333508M--------- 51
333508S --------- 52
333509M--------- 51
333510M--------- 51
333510S --------- 52
333511M--------- 51
333511S --------- 52
333512M--------- 51
333512S --------- 52
333513M--------- 51
333514M--------- 51
333514S --------- 52
333515M--------- 51
333515S --------- 52
333516M--------- 51
333516S --------- 52
333517M--------- 51
333518M--------- 51
333518S --------- 52
333519M -------- 51
333519S--------- 52
33351-030 -----148
333520M -------- 51
333520S--------- 52
333521M -------- 51
333522M -------- 51
333522S--------- 52
333523M -------- 51
333524M -------- 51
333524S--------- 52
333526S--------- 52
333528S--------- 52
333530S--------- 52
333532S--------- 52
33411-020------142
33411-040------142
33411-050------142
33412-040 -----142
33412-050 -----142
33421-040 -----141
33451-030 -----148
33461-060 -----148
33462-060 -----148
33611-055------143
33612-055 -----143
33621-075 -----143
33622-075 -----143
33631-110------143
33632-110------143
337504M -------- 53
337505M -------- 53
337506M -------- 53
337507M -------- 53
337508M -------- 53
337510M -------- 53
337511M--------- 53
337512M -------- 53
337514M -------- 53
337516M -------- 53
337518M -------- 53
33811-150------145
33812-150 -----145
33831-180 -----145
33832-180 -----145
33841-180 -----144
33842-180 -----144
33851-120 -----144
33851-250 -----145
33852-120 -----144
33852-250 -----145
33911-250------146
33912-250 -----146
33921-300 -----146
33922-300 -----146

34xxx

3406MP---------107
34111-1DG-----165
34111-1EG-----165
34111-2DG-----165
34111-2EG-----165
3419PP --------107
34207-1A-------164
34223-1A ------ 162
34223-1B ------ 162
34223-1C ------ 162
34262-1CG---- 155
34262-1DG---- 155
34262-1EG---- 155
34262-2DG---- 155
34262-3DG---- 155
3426A-1DG---- 157
3426A-1EG---- 157
3426A-2DG---- 157
3426A-2EG---- 157
3426C-1DF---- 156
3426C-2DF---- 156
34307-1A ------ 164
3436C-1DF---- 156
3436C-2DF---- 155
34323-1A ------ 162
34323-1B ------ 162
34323-2A ------ 162
34323-2B ------ 162
343506M------- 104
343507M------- 104
343508M------- 104
343508S ------- 104
343509M------- 104
343510M------- 104
343510S ------- 104
343511M------- 104
343512M------- 104
343512S ------- 104
343513M------- 104
343514M------- 104
343514S ------- 104
343515M------- 104
343516M------- 104
343516S ------- 104
343517M------- 104
343518M------- 104
343518S ------- 104
343519M------- 104
343520M------- 104
343520S ------- 104
343521M------- 104
343522M------- 104
343522S ------- 104
343523M------- 104
343524M------- 104
343524S ------- 104
343526S ------- 104
343528S ------- 104
34362-1CG---- 155
34362-1DG---- 155
34362-1EG---- 155
34362-2CG---- 155
34362-2DG---- 155
34362-2EG---- 155
34362-3DG---- 155
34367-2AG---- 163
3436A-2DG---- 157
3436A-2EG---- 157
34387-2AG---- 163
34422-1GG---- 155
34422-3GG---- 155
34423-1A-------162
34423-1B-------162
34423-1C-------162
34423-2A-------162
34423-2B-------162
34440-----------165
34407-1A-------164
34462-1CG ----155
34462-1DG ----155
34462-1EG-----155
34462-1FG-----155
34462-2CG ----155
34462-2DG ----155
34462-2EG-----155
34462-2FG-----155
34467-1AG-----163
3446A-1DG ----157
3446A-1EG ----157
3446A-2DG ----157
3446A-2EG ----157
34487-1AG-----163
34501107M ----159
34501107S-----159
34501108M ----159
34501108S-----159
34501109M ----159
34501110M-----159
34501111M-----159
34501111S -----159
34501112M-----159
34501113M-----159
34501113S -----159
34501114M-----159
34501114S -----159
34501115M-----159
34501116M-----159
34501116S -----159
34501117M-----159
34501117S -----159
34501118M-----159
34501119M-----159
34501119S -----159
34501213M ----159
34501214M ----159
34501215M ----159
34501216M ----159
34501217M ----159
34501218M ----159
34501219M ----159
34501221M ----159
34501222M ----159
34501224M ----159
34501227M ----159
34501230M ----159
34501232M ----159
34501234M ----159
34501236M ----159
34501238M ----159
34501241M ----159
34502107M ----160
34502107S-----160
34502108M ----160
34502108S-----160
34502110M ----160
34502110S ---- 160
34502111M ---- 160
34502111S----- 160
34502112M ---- 160
34502113M ---- 160
34502113S ---- 160
34502114M ---- 160
34502114S ---- 160
34502115M ---- 160
34502116M ---- 160
34502116S ---- 160
34502117M ---- 160
34502117S ---- 160
34502118M ---- 160
34502119M ---- 160
34502119S ---- 160
34502121M ---- 160
34502122M ---- 160
34502213M ---- 160
34502214M ---- 160
34502215M ---- 160
34502216M ---- 160
34502217M ---- 160
34502218M ---- 160
34502219M ---- 160
34502221M ---- 160
34502222M ---- 160
34502224M ---- 160
34502227M ---- 160
34502230M ---- 160
34502232M ---- 160
34502234M ---- 160
34502236M ---- 160
34502241M ---- 160
34503102R ---- 159
34503103R ---- 159
34503203R ---- 159
34503204R ---- 159
345101E08MR 161
345102D08MR 161
345102E08MR 161
345104D08MR 161
34512-1CG ---- 158
34512-1DG ---- 158
34512-1EG ---- 158
34512-1FG ---- 158
34512-2CG ---- 158
34512-2DG ---- 158
34512-2EG ---- 158
34512-2FG ---- 158
34512-3CG ---- 158
34512-3DG ---- 158
34512-3EG ---- 158
34512-3FG ---- 158
34512-4DG ---- 158
3452-08F --------60
3452-08G --------60
3452-10F---------60
3452-10G --------60
345201D11MR 161
345201E11MR 161
345202D11MR 161
345202E11MR 161
345203D11MR 161
345203E11MR 161
34522-1CG ----158
34522-1DG ----158
34522-1EG-----158
34522-1FG-----158
34522-2CG ----158
34522-2DG ----158
34522-2EG-----158
34522-2FG-----158
34522-3CG ----158
34522-3DG ----158
34522-3EG-----158
34522-3FG-----158
34607-1A-------164
34660-----------165
34662-1CG ----155
34662-1DG ----155
34662-1EG-----155
34662-2CG ----155
34662-2DG ----155
34662-2EG-----155
34662-3CG ----155
34662-3DG ----155
34662-3EG-----155
34688-05A -----166
34862-1CG ----155
34862-1DG ----155
34862-1EG-----155
34862-2CF -----156
34862-2CG ----156
34862-2DF -----156
34862-2DG ----156
34862-2EF -----156
34862-2EG-----156
34862-2FF -----156
34862-2FG-----156

35xxx

3508MR---------- 63
3508SR ---------- 63
3511-06 ---------189
3511-10 ---------189
35114MR -------214
3513MR---------- 62
3520MR02 ------ 63
3523MR---------- 63
3523MR04 ------ 63
3524MR---------- 64
3527MR---------- 64
3534MR---------- 65
353506M--------103
353507M--------103
353508M--------103
353508S --------103
353509M--------103
353510M--------103
353510S --------103
353511M--------103
353512M--------103
353512S --------103
353513M--------103
353514M--------103
353514S --------103
353515M--------103

Index

353516M ------- 103
353516S ------- 103
353517M ------- 103
353518M ------- 103
353518S ------- 103
353519M ------- 103
353520S ------- 103
353522S ------- 103
353524S ------- 103
3571-08 ---------- 60
357505M ------- 105
357506M ------- 105
357507M ------- 105
357508M ------- 105
357510M ------- 105
357512M ------- 105
357514M ------- 105

36xxx

3611-06 -------- 186
3611-08 -------- 186
3611-10 -------- 186
3611-12 -------- 186
3611-15 -------- 186
3611-18 -------- 186
3611-24 -------- 186
363016 ---------- 54
363021 ---------- 54
3631-10R ------ 186
363516 ---------- 54
363521 ---------- 54
366016 ---------- 54
366021 ---------- 54
366516 ---------- 54
366521 ---------- 54
36A014 ---------- 54
36A018 ---------- 54
36A514 ---------- 54
36A518 ---------- 54

37xxx

372108M ------- 181
372110M ------- 181
372110S ------- 181
372111M ------- 181
372112M ------- 181
372112S ------- 181
372113M ------- 181
372114M ------- 181
372114S ------- 181
372115M ------- 181
372116M ------- 181
372116S ------- 181
372117M ------- 181
372118M ------- 181
372118S ------- 181
372119M ------- 181
372120S ------- 181
372122S ------- 181
372124S ------- 181
37221-030 ----- 150
373008M ------- 179
373009M ------- 179
373010M ------- 179
373011M ------- 179
373012M ------- 179
373013M ------- 179
373014M ------- 179
373015M ------- 179
373016M ------- 179
373017M ------- 179
373018M ------- 179
373019M ------- 179
373108M ------- 179
373109M ------- 179
373110M ------- 179
373111M ------- 179
373112M ------- 179
373113M ------- 179
373114M ------- 179
373115M ------- 179
373116M ------- 179
373117M ------- 179
373118M ------- 179
373119M ------- 179
373121M ------- 179
373122M ------- 179
373124M ------- 179
373202H ------- 178
373202R ------- 178
373203R ------- 178
373204R ------- 178
373208M ------- 180
373209M ------- 180
373210M ------- 180
373211M ------- 180
373212M ------- 180
373213M ------- 180
373214M ------- 180
373215M ------- 180
373216M ------- 180
373217M ------- 180
373218M ------- 180
373219M ------- 180
37321-050 ----- 150
373221M ------- 180
373222M ------- 180
373224M ------- 180
373225H ------- 178
37323-080 ----- 150
37360809M ---- 180
37361011M ---- 180
37361213M ---- 180
37361415M ---- 180
37361618M ---- 180
37361719M ---- 180
37370607M ---- 180
37370809M ---- 180
37371011M ---- 180
37371213M ---- 180
37371415M ---- 180
37371618M ---- 180
37371719M ---- 180
37372123M ---- 180
37372224M ---- 180
37423-080 ----- 150
375010M -------- 55
375011M -------- 55
375012M -------- 55
375013M -------- 55
375014M -------- 55
375015M -------- 55
375016M -------- 55
375017M -------- 55
375018M -------- 55
375019M -------- 55
3755-08G ------- 57
3755DK ---------- 57
3760-45 --------- 57
3760DK --------- 57
3761-08F -------- 57
3761-08P ------- 57
3761DK --------- 57
3769-08F -------- 57
3769-08P ------- 57
3769DK01 ------ 57
3771-08F -------- 58
3771-08G ------- 58
3771DK --------- 58
3779-08F -------- 58
3779-08G ------- 58
3779DK ---------- 58
3781-11F -------- 58
3781-11P -------- 58
3781DK --------- 58
3789-11F ------- 58
3789-11P ------- 58
3789DK ---------- 58
3792 ------------ 60
3795-15 ------- 190
3795-18 ------- 190
3795-24 ------- 190
3795-30 ------- 190
3796 ---------- 107
3796P ---------- 107

38xxx

3812 ------------ 60
3814 ------------ 60
3862 ---------- 106
3864 ---------- 106
3864P ---------- 106

40xxx

4010MR --------- 81
4010SR ---------- 81
4012MR --------- 85
4012SR ---------- 85
401408M -------- 71
401409M -------- 71
401410M -------- 71
401411M -------- 71
401412M -------- 71
401413M -------- 71
401414M -------- 71
401419M -------- 71
401505M ----- 115
401506M ------- 115
401507M ----- 115
401508M ----- 115
401508S ------- 115
401509M ----- 115
401510M ----- 115
401512M ----- 115
401512S -------- 115
401513M ------ 115
401514M ------ 115
401516S -------- 115
401517M ------ 115
401519M ------ 115
402102 ---------- 72
402103 ---------- 72
402104 ---------- 72
402208 ---------- 72
402210 ---------- 72
402212 ---------- 72
402214 ---------- 72
402216 ---------- 72
402320 ---------- 73
402325 ---------- 73
402327 ---------- 73
402330 ---------- 73
402340 ---------- 73
402345 ---------- 73
402350 ---------- 73
402355 ---------- 73
402360 ---------- 73
402370 ---------- 73
4024MR --------- 85
4024SR --------- 85
402503 ---------- 72
402504 ---------- 72
402505 ---------- 72
402506 ---------- 72
402507 ---------- 72
402508 ---------- 72
402510 ---------- 72
402512 ---------- 72
402514 ---------- 72
402517 ---------- 72
402519 ---------- 72
402605 ---------- 72
402606 ---------- 72
402608 ---------- 72
402610 ---------- 72
402612 ---------- 72
402614 ---------- 72
4026MR -------- 86
4026MR03 ------ 86
4026MR04 ----- 86
4026SR --------- 86
4026SR03 ----- 86
402720 ---------- 74
402725 ---------- 74
402727 ---------- 74
402730 ---------- 74
402740 ---------- 74
402745 ---------- 74
402750 ---------- 74
402755 ---------- 74
402760 ---------- 74
4028MR --------- 87
4028MR02 ----- 87
4028SR --------- 87
402B16 ---------- 73
402B18 ---------- 73
4032MR -------- 87
4032SR --------- 87
403320 ---------- 73
403325 ---------- 73
403327 ---------- 73
403330 ---------- 73
403340 ---------- 73
403345 ---------- 73
403350 ---------- 73
403355 ---------- 73
403360 ---------- 73
403370 ---------- 73
4033MR --------- 85
4033SR ---------- 85
4034MR --------- 88
403504 ---------- 72
403505 ---------- 72
403506 ---------- 72
403507 ---------- 72
403508 ---------- 72
403510 ---------- 72
403512 ---------- 72
403514 ---------- 72
403517 ---------- 72
403519 ---------- 72
403606 ---------- 72
403608 ---------- 72
403610 ---------- 72
403612 ---------- 72
403720 ---------- 73
403725 ---------- 73
403727 ---------- 73
403730 ---------- 73
403740 ---------- 73
403745 ---------- 73
403750 ---------- 73
403755 ---------- 73
403760 ---------- 73
404108 ---------- 73
4042CR --------- 88
4042CR02 ------ 88
4044CR --------- 86
404904 ---------- 73
404905 ---------- 73
404906 ---------- 73
404907 ---------- 73
404908 ---------- 73
404909 ---------- 73
404910 ---------- 73
404912 ---------- 73
404913 ---------- 73
404914 ---------- 73
404916 ---------- 73
404925 ---------- 73
405325 --------- 114
405327 --------- 114
405330 --------- 114
405340 --------- 114
405345 --------- 114
405350 --------- 114
405355 --------- 114
405360 --------- 114
405504M ------- 114
405505M ------- 114
405506M ------- 114
405506S ------- 114
405507M -------- 114
405508M -------- 114
405508S -------- 114
405510M -------- 114
405510S -------- 114
405512M -------- 114
405512S -------- 114
405513M -------- 114
405514M -------- 114
405514S -------- 114
405516S -------- 114
405608M -------- 114
405610M -------- 114
405612M -------- 114
406325 ---------- 114
406327 ---------- 114
406330 ---------- 114
406340 ---------- 114
406345 ---------- 114
406350 ---------- 114
406355 ---------- 114
406360 ---------- 114
406504 ---------- 115
406505 ---------- 115
406506 ---------- 115
406508 ---------- 115
406510 ---------- 115
406512 ---------- 115
406514 ---------- 115
406608 ---------- 72
406610 ---------- 72
406612 ---------- 72
4066MR -------- 80
4066SR --------- 80
4072MR -------- 80
4072SR --------- 80
407505 ---------- 115
407506 ---------- 115
407508 ---------- 115
407510 ---------- 115
407512 ---------- 115
407514 ---------- 115

41xxx

41026MR ------- 88
41026SR --------- 88
4104PR ---------- 82
4105PR ---------- 82
4106PR --------- 81
4108FR ---------- 89
4109PR ---------- 83
4110PR ---------- 83
4111FR ---------- 89
4112FR ---------- 89
4116PR --------- 82
4118MR ---------- 81
4119PR ---------- 83
4120PR ---------- 83
4121-11GR ------ 77
4126PR ---------- 82
4128PR ---------- 84
4136PR ---------- 82
414708S -------- 115
414710M -------- 115

Index

414710S --------115
414808S --------- 71
414810M--------- 71
414810S --------- 71
414A08S--------115
41526MR -------- 88
41526SR--------- 88

42xxx

4208MR ---------- 83
4208SR ---------- 83
42104GP------- 197
42104GP01 --- 197
42114GP ----- 197
42116GP ----- 197
4215MR -------- 83
4220MR -------- 84
4221-18 ---------- 77
4221-24 ---------- 77
4221-30 ---------- 77
4221-36 ---------- 77
4223-02 ---------- 77
4223-05 ---------- 77
4223-10 ---------- 77
423008M ------- 68
423009M ------- 68
423010M ------- 68
423010S --------- 68
423011M ------- 68
423012M--------- 68
423012S --------- 68
423013M ------- 68
423014M ------- 68
423014S --------- 68
423015M ------- 68
423016M ------- 68
423016S --------- 68
423017M ------- 68
423018M ------- 68
423018S --------- 68
423019M ------- 68
423020M ------- 68
423020S --------- 68
423021M ------- 68
423022M ------- 68
423022S --------- 68
423023M ------- 68
423024M ------- 68
423024S --------- 68
423025M ------- 68
423026M ------- 68
423026S --------- 68
423027M ------- 68
423028M ------- 68
423028S --------- 68
423029M--------- 68
423030M ------- 68
423030S --------- 68
423032M ------- 68
423032S --------- 68
423033M ------- 68
423034S --------- 68
423036M ------- 68
423036S --------- 68
423038S--------- 68
423040S--------- 68
423508M ------- 69
423509M ------- 69
423510M -------- 69
423510S ------- 69
423511M ------- 69
423512M -------- 69
423512S ------- 69
423513M ------- 69
423514M -------- 69
423514S ------- 69
423515M ------- 69
423516M -------- 69
423516S ------- 69
423517M ------- 69
423518M -------- 69
423518S ------- 69
423519M ------- 69
423520M -------- 69
423520S ------- 69
423521M ------- 69
423522M -------- 69
423522S--------- 69
423523M ------- 69
423524M -------- 69
423524S ------- 69
423525M ------- 69
423526M -------- 69
423526S ------- 69
423527M -------- 69
423528M -------- 69
423528S ------- 69
423529M ------- 69
423530M -------- 69
423530S ------- 69
423532M -------- 69
423532S ------- 69
423533M -------- 69
423534S ------- 69
423536M -------- 69
423536S--------- 69
423538M -------- 69
423538S--------- 69
423540S--------- 69
423541M -------- 69
423542S--------- 69
423544S--------- 69
423546S--------- 69
423548S--------- 69
424508M ----- 70
424509M ----- 70
424510M ---- 70
424512M -------- 70
424513M -------- 70
424514M -------- 70
4251-02---------- 77
4251-03---------- 77
4251-04---------- 77
4251-05---------- 77
4251-06---------- 77
4251-08---------- 77
4251-10---------- 77
425508M -------- 70
425509M--------- 70
425510M--------- 70
425512M--------- 70
425513M--------- 70
425514M--------- 70
4260-03 ------- 116
4260-03P ------ 116
4260-04 ------- 116
4260-04P ------ 116
4260-05 ------- 116
4260-05P ------ 116
4260-06 ------- 116
4260-06P ------ 116
4260-10 ------- 116
4260-10P ----- 116
4260-12 ------- 116
4260-12P ----- 116
427510M ------- 70
427512M ------- 70
427514M--------- 70
427516M--------- 70
427518M--------- 70
427520M--------- 70
427522M--------- 70
427524M--------- 70
4293-02 ---------- 77
4293-05 ---------- 77
4293-10 ---------- 77

43xxx

4308MR --------- 83
4311-16F--------- 78
4311-16G ------- 78
4311MR --------- 81
4315MR --------- 83
4320MR --------- 84
4322MR --------- 84
4325MR --------- 84
43280212 ------ 276
433008M--------- 66
433009M ------- 66
433010M ------- 66
433010S -------- 66
433011M -------- 66
433012M ------- 66
433012S --------- 66
433013M--------- 66
433013S --------- 66
433014M ------- 66
433014S --------- 66
433015M ------- 66
433015S --------- 66
433016M ------- 66
433016S --------- 66
433017M ------- 66
433018M ------- 66
433018S --------- 66
433019M ------- 66
433019S --------- 66
433020M ------- 66
433020S --------- 66
433021M ------- 66
433022M ------- 66
433022S --------- 66
433023M ------- 66
433024M ------- 66
433024S--------- 66
433025M ------- 66
433025S--------- 66
433026M ------- 66
433026S--------- 66
433027M ------- 66
433028M ------- 66
433028S--------- 66
433029M ------- 66
433030M ------- 66
433030S--------- 66
433032M ------- 66
433032S--------- 66
433033M ------- 66
433034S--------- 66
433036M ------- 66
433036S--------- 66
433038S--------- 66
433040S--------- 66
433506M -------- 67
433507M -------- 67
433508M ------- 67
433509M -------- 67
433510M ------- 67
433510S--------- 67
433511M--------- 67
433512M -------- 67
433512S--------- 67
433513M ------- 67
433514M ------- 67
433514S--------- 67
433515M ------- 67
433515S ------- 67
433516M ------- 67
433516S ------- 67
433517M ------- 67
433518M ------- 67
433518S ------- 67
433519M -------- 67
433519S--------- 67
433520M ------- 67
433520S--------- 67
433521M ------- 67
433522M ------- 67
433522S--------- 67
433523M -------- 67
433524M ------- 67
433524S ------- 67
433525M -------- 67
433525S ------- 67
433526M -------- 67
433526S ------- 67
433527M ------- 67
433528M -------- 67
433528S ------- 67
433529M -------- 67
433530M -------- 67
433530S ------- 67
433532M -------- 67
433532S ------- 67
433533M -------- 67
433534M -------- 67
433534S --------67
433536M---------67
433536S --------67
433538M---------67
433538S --------67
433539M---------67
433540S --------67
433541M -------67
433546M -------67
437510M -------70
437512M -------70
437514M -------70
437516M -------70
437518M -------70
437520M---------70
437522M---------70
437524M---------70

44xxx

4407MP ------- 120
4408MP ------- 118
4408SP ------- 118
4410MP ------- 118
4410SP ------- 118
44116MP ---- 152
44118MP ----- 152
4412MP ----- 118
4413MP ----- 119
4414SP ------- 118
441517M ----- 112
441519M ----- 112
441521M ----- 112
4415MP ------- 119
4415MP03 --- 119
4416SP ------- 119
4417PP--------- 120
443008M------- 109
443009M------- 109
443010M------- 109
443011M ------- 109
443012M------- 109
443013M------- 109
443014M------- 109
443015M------- 109
443016M------- 109
443017M------- 109
443018M------- 109
443019M------- 109
443020M------- 109
443021M------- 109
443022M------- 109
443023M------- 109
443024M------- 109
443027M------- 109
443030M------- 109
443032M------- 109
443036M ----- 109
443508M ----- 110
443509M ----- 110
443510M ----- 110
443510S ---- 110
443511M ------ 110
443512M ----- 110
443512S ---- 110
443513M ------110
443514M ------110
443514S -----110
443515M ------110
443516M ------110
443516S -------110
443517M ------110
443518M ------110
443518S -----110
443519M ------110
443520M ------110
443520S -------110
443521M ------110
443522M ------110
443522S -------110
443523M ------110
443524M ------110
443524S -------110
443525M ------110
443526M ------110
443526S -------110
443527M ------110
443528M ------110
443528S -------110
443529M ------110
443530M ------110
443530S -------110
443532M ------110
443532S--------110
443533M--------110
443534M--------110
443534S--------110
443536M--------110
443536S--------110
443538M--------110
443538S--------110
443540S--------110
443541M--------110
443546M--------110
44504MP -------151
44504MPB -----151
4452-15F -------- 78
4452-18F -------- 78
4452-24F -------- 78
4452DK ---------- 78
4452DK1 ------- 78
4457MP---------120
4462-18 ---------- 78
4462-24 ---------- 78
4462DK ---------- 78
4466MP -------121
4466SP ---------121
4467PP --------120
4472MP -------121
4472SP --------121
4476MP---------120

45xxx

4501MR---------- 85
4505MR---------- 89
4505SR ---------- 89
4510MR---------- 81
4510SR --------- 81
4511-06 --------189

Index

4511-10 ------- 189
45115PP ------- 273
4512MR ---------- 85
4512SR --------- 85
45211PP ------- 273
4524MR ---------- 85
4524SR ---------- 85
4526MR ---------- 86
4526MR03------- 86
4526MR04------- 86
4526SR --------- 86
4526SR03 ------ 86
4528MR --------- 87
4528MR02------- 87
4528SR --------- 87
453008M ----- 108
453009M ----- 108
453010M ----- 108
453011M ----- 108
453012M ---- 108
453013M------- 108
453014M------- 108
453015M------- 108
453016M------- 108
453017M------- 108
453018M------- 108
453019M------- 108
453020M------- 108
453021M ----- 108
453022M------- 108
453023M------- 108
453024M------- 108
453025M------- 108
453026M------- 108
453027M ----- 108
453028M------- 108
453029M------- 108
453030M------- 108
453032M------- 108
453033M------- 108
453034M------- 108
453036M ----- 108
453041M------- 108
4532MR --------- 87
4532SR --------- 87
4533MR --------- 85
4533SR --------- 85
4534MR ---------- 88
453508M ----- 108
453509M ----- 108
453510M ----- 108
453510S ------ 109
453511M ----- 108
453512M ----- 108
453512S ------ 109
453513M ----- 108
453514M ----- 108
453514S ------ 109
453515M ----- 108
453516M ----- 108
453516S ------ 109
453517M ----- 108
453518M ----- 108
453518S ------ 109
453519M ------108
453520M ------108
453520S ------109
453521M ------108
453522M ------108
453522S ------109
453523M ------108
453524M ------108
453524S--------109
453525M -------108
453526M ------108
453526S ------109
453527M ------108
453528M ------108
453528S ------109
453529M -------108
453530M ------108
453530S ------109
453532M ------108
453532S ------109
453533M ------108
453534M ------108
453534S ------109
453536M ------108
453536S ------109
453538M ------108
453538S ------109
453539M ------108
453540S ------109
453541M ------108
453546M ------108
4542CR -------- 88
4542CR02 ------ 88
4544CR -------- 86
4566MR -------- 80
4572-10---------- 78
4572-12---------- 78
4572DK --------- 78
4572MR -------- 80
4572SR --------- 80
4573-10 -------- 78
4573DK --------- 78
457510M ------ 112
457512M ------ 112
457514M ------- 112
457516M ------ 112
457518M ------ 112
457520M ------ 112
4581-10 -------- 79
4583-12 -------- 79
4584-12---------- 79

46xxx

463016 --------- 71
463021 --------- 71
463516 --------- 71
463521 --------- 71
466016 --------- 71
466021 --------- 71
466516 --------- 71
466521---------- 71

47xxx

4725-10F ------ 74
4725-10G ------ 74
4725-12B -------- 74
4725-12F--------- 74
4725-12G -------- 74
4725DK01 -------- 74
4755-10G -------- 74
4755DK---------- 74
4760-05 ---------- 74
4760DK---------- 74
4762-10F--------- 75
4762-10G -------- 75
4762-10P -------- 75
4762-15F--------- 75
4762-15G -------- 75
4762-15P -------- 75
4762DK---------- 75
4767-10F--------- 75
4767-10G -------- 75
4767-15F--------- 75
4767-15G -------- 75
4767DK---------- 75
4768-10F--------- 75
4768-10G -------- 75
4768-10P -------- 75
4768-15F--------- 75
4768-15G -------- 75
4768-15P ------ 75
4768DK---------- 75
4771-10B -------- 76
4771-10F--------- 76
4771-10G -------- 76
4771DK01 -------- 76
4779-10B -------- 76
4779-10F -------- 76
4779-10G -------- 76
4779DK01 ------ 76
4781-12F--------- 76
4781-12P -------- 76
4781DK --------- 76
4789-12F--------- 76
4789-12P -------- 76
4789DK---------- 76
4791---------- 79
4795-18 -------- 190
4795-24 -------- 190
4795-30 -------- 190
4795-36 -------- 190
4796 ---------- 116
4796P --------- 116
4797 ---------- 116
4797P --------- 116
4798 ---------- 116
4798P---------- 116
479AP ---------- 116

48xxx

4813---------- 79
4816---------- 79
483510M--------111
483511M--------111
483512M--------111
483513M ------111
483514M ------111
483516M ------111
483517M ------111
483519M ------ 111
483521M ------ 111
483522M ------ 111
483523M ------ 111
483524M ------ 111
483526M ------ 111
483527M ------ 111
483530M ------ 111
4863 ---------- 117
4863P ---------- 117
4866 ---------- 117
4866P ---------- 117
4873 ---------- 117
4873P ---------- 117

49xxx

493008M ------- 111
493009M ------- 111
493010M ------- 111
493011M-------- 111
493012M ------- 111
493013M ------- 111
493014M ------- 111
493015M ------- 111
493016M ------- 111
493017M ------- 111
493018M ------- 111
493019M ------- 111
493020M ------- 111
493021M ------- 111
493022M ------- 111
493023M ------- 111
493024M ------- 111
493027M ------- 111
493030M ------- 111
493032M ------- 111
493036M ------- 111
493510M ------ 111
493510S ------ 112
493511M ------ 111
493512M ---- 111
493512S ------ 112
493513M ---- 111
493514M ---- 111
493514S ------ 112
493516M ---- 111
493516S ------ 112
493517M ------ 111
493518S ------ 112
493519M ---- 111
493520S ------ 112
493521M ------ 111
493522M ------ 111
493522S ------ 112
493523M ------ 111
493524M ------ 111
493524S ------ 112
493526M ------ 111
493526S ------ 112
493527M ------ 111
493528S ----- 112
493530M ------ 111
493530S ----- 112
493532S ----- 112
493534S ---- 112
493536S ---- 112
493538S ---- 112
493540S ------- 112
4A5510 --------- 113
4A5511 --------- 113
4A5512 --------- 113
4A5513 --------- 113
4A5514 --------- 113
4A5515 --------- 113
4A5516 --------- 113
4A5517 --------- 113
4A5518 --------- 113
4A5519 --------- 113
4A5521 --------- 113
4A5522 --------- 113
4A5524 --------- 113
4B5510 --------- 113
4B5511 --------- 113
4B5512 --------- 113
4B5513 --------- 113
4B5514 --------- 113
4B5515 --------- 113
4B5516 --------- 113
4B5517 --------- 113
4B5518 --------- 113
4B5519 --------- 113
4B5521 --------- 113
4B5522 --------- 113
4B5524 ---------P22

50xxx

5022MR ---------97
5022SR----------97
5039CR ----------97
5060-08 -------- 167
5060-10 -------- 167
5060-12 -------- 167
5060-14 -------- 167
5060-16 -------- 167
5060-18 -------- 167
5060-20 -------- 167
5060-22 -------- 167
5060-24 -------- 167
5060-26 -------- 167
5060-28 -------- 167
5060-30 -------- 167
5060-32 -------- 167
5060-34 -------- 167
5060-36 -------- 167
5060-40 -------- 167
5071-42 -------- 167
5071-44 -------- 167
5071-46 -------- 167
5071-48 -------- 167
5071-50 -------- 167
5071-52 -------- 167
5071-54 -------- 167
5071-56 -------- 167
5071-58 -------- 167
5071-60 -------- 167
5071-62 -------- 167
5071-64 -------- 167

55xxx

5522MR -------- 97
553417M ------139
553421M ------139
553426S -------139
553430S -------139
553533M ------139
553534S -----139
553535M ------139
553536S -------139
553538M ------139
553540S -------139
553541M ------139
553542S -------139
553546S --------139

57xxx

574208M ------191
574210M ------191
574212M ------191
574213M ------191
574214M ------191
574217M ------191
575208M ------191
575210M ------191
575212M ------191
575213M ------191
575214M ------191
575217M ------191
575510M--------191
575512M--------191
576208M ------191
576210M ------191
576212M ------191
576213M ------191
576214M ------191
576217M ------191
577208M--------192
577210M--------192
577212M--------192
577213M--------192
577214M--------192
577217M--------192

59xxx

59000810-------169
59001012-------169
59001214-------169
59001416-------169
59001618-------169
59001820-------169
59002022-------169
59002224-------169
59002628-------169
59003032-------169
59003034-------169
59003236-------169
59003640-------169
59301012-------173
59301214-------173
59301618-------173
59301820-------173
59302224-------173
59302428-------173
59601214-------170
59601618-------170

Index

59602022 ------ 170
59602428 ------ 170
59603032 ------ 170
59700810 ------ 171
59701012 ------ 171
59701214 ------ 171
59701416 ------ 171
59701618 ------ 171
59701820 ------ 171
59702022 ------ 171
59702224 ------ 171
59702428 ------ 171
59702628 ------ 171
59703032 ------ 171
59703436 ------ 171
59703640 ------ 171

60xxx

6011-05R ------ 200
6011-07N ------ 200
6011-07R ------ 200
6011-10N ------ 200
6011-10R ------ 200
601514M ------- 126
601517M ------- 126
601519M ------- 126
601521M ------- 126
601522M ------- 126
601524M ------- 126
601527M ------- 126
6016MR -------- 94
6016SR --------- 94
6023MR -------- 94
6023SR --------- 94
6031-07N ------ 200
6031-07R ------ 200
6031-10N ------ 200
6031-10R ------ 200
608510 --------- 126
608512 --------- 126
608514 --------- 126
608517 --------- 126
608519 --------- 126
608522 --------- 126
609519 --------- 126
609522 --------- 126
609524 --------- 126
609527 --------- 126
609532 --------- 126
609616M ------- 126
609622M ------- 126

61xxx

6111-06 --------- 193
6111-07 --------- 193
6111-08 --------- 193
6112-09A ------ 193
6112-09C ------ 193
6114-05 -------- 193
6116-07A ------ 198
6116-08A ----- 198
6131-12 -------- 207
6131-12P01 --- 207
6131-14 -------- 207
6131-14P01 --- 207
6131-18 ---------207
6131-18P01 ---207
6131-24 ---------207
6131-24P01 ---207
6131-30 ---------207
6131-30P01 ---207
6131-36 ---------207
6131-36P01 ---207
6131-42 ---------207
6131-42P01 ---207
6146-08A -------199

62xxx

6211-06 ---------194
6213-06 ---------194
6214-05 ---------194
6214-45 ---------194
6216-06A -------198
6224CR ---------- 94
6226CR ---------- 94
6231-07 ---------194
6231-08 ---------194
623517M -------- 92
623518M -------- 92
623519M -------- 92
623520M -------- 92
623521M -------- 92
623522M -------- 92
623523M -------- 92
623524M -------- 92
623525M -------- 92
623526M -------- 92
623527M -------- 92
623528M -------- 92
623529M -------- 92
623530M -------- 92
623531M -------- 92
623532M -------- 92
623533M -------- 92
623534M -------- 92
623535M -------- 92
623536M -------- 92
623537M -------- 92
623538M -------- 92
623539M -------- 92
623540M -------- 92
623541M -------- 92
623542M -------- 92
623543M -------- 92
623544M -------- 92
623545M -------- 92
623546M -------- 92
623547M -------- 92
623548M -------- 92
623549M -------- 92
623550M -------- 92
623551M -------- 92
623552M -------- 92
623553M -------- 92
623554M -------- 92
623555M -------- 92
623556M -------- 92
623557M -------- 92
623558M -------- 92
623559M ---------92
623560M ---------92
6236-07A ------ 198
6251-04 ---------93
6251-08 ---------93
6251-16 ---------93
6260-04 ------- 127
6260-04P ------ 127
6260-07 ------- 127
6260-07P ------ 127
6260-10 ------- 127
6260-10P ------ 127
6260-13 ------- 127
6260-13P ------ 127

63xxx

6311-06 ------- 193
6311-08 ------- 193
6313-06 ------- 193
6314-05 ------- 193
6315-06 -------- 200
6315-09 ------- 200
6316MR ----------94
6318-08A ------ 198
6323MR ----------94
633017M -------90
633019M -------90
633021M -------90
633022M ---------90
633022S --------90
633023M -------90
633024M -------90
633024S ------90
633026M -------90
633026S --------90
633027M -------90
633028M -------90
633028S --------90
633029M -------90
633030M -------90
633030S --------90
633032M -------90
633032S ------90
633033M -------90
633034M -------90
633034S ------90
633035M -------90
633036M -------90
633036S --------90
633038M -------90
633038S --------90
633040S --------90
633041M -------90
633042M -------90
633042S --------90
633044S --------90
633046M -------90
633046S --------90
633048M -------90
633048S --------90
633050M -------90
633050S --------90
633052S ---------90
633054M -------90
633054S ------- 90
633056S ------- 90
633058M -------- 90
633058S ------- 90
633060M -------- 90
633060S ------- 90
633062S ------- 90
633063M -------- 90
633064S ------- 90
633065M -------- 90
633066S ------- 90
633068S ------- 90
633070M -------- 90
633070S ------- 90
633072S ------- 90
633074S --------- 90
633076S ------- 90
633078S ------- 90
633080S ------- 90
633082S ------- 90
633084S ------- 90
633086S ------- 90
633088S ------- 90
6331-06 ---------194
6331-08 -------194
6334-05 -------194
633517M -------- 91
633518M -------- 91
633519M -------- 91
633520M -------- 91
633521M -------- 91
633522M -------- 91
633523M -------- 91
633524M -------- 91
633525M -------- 91
633526M -------- 91
633527M -------- 91
633528M -------- 91
633529M -------- 91
633530M -------- 91
633531M -------- 91
633532M -------- 91
633533M -------- 91
633534M -------- 91
633535M -------- 91
633536M -------- 91
633537M -------- 91
633538M -------- 91
633539M -------- 91
633540M -------- 91
633541M -------- 91
633542M -------- 91
633543M -------- 91
633544M -------- 91
633545M -------- 91
633546M -------- 91
633547M -------- 91
633548M -------- 91
633549M -------- 91
633550M -------- 91
633551M -------- 91
633552M -------- 91
633553M -------- 91
633554M -------- 91
633555M ---------91
633556M ---------91
633557M ---------91
633558M ---------91
633559M ---------91
633560M ---------91
633563M ---------91
633565M ---------91
633570M ---------91
6336-08A ------ 199

64xxx

6408MP ------- 129
6408MP10 --- 129
6408SP10 ---- 129
6409MP ------- 129
6409MP10 --- 129
6409SP10 ---- 129
6410MP ------- 129
6410SP --------- 129
6411-06 --------- 195
64111MP ------ 153
64115MP ----- 153
6411MP--------- 130
6431-10 ------- 195
6431-11 ------- 195
643519M ------- 124
643521M ------- 124
643522M ------- 124
643523M ------- 124
643524M ------- 124
643524S ------ 124
643525M ------- 124
643526M ------- 124
643526S ------ 124
643527M ------- 124
643528M ------- 124
643528S ------ 124
643529M ------- 124
643530M ------- 124
643530S ------ 124
643532M ------- 124
643532S ------ 124
643533M ------- 124
643534M ------- 124
643534S ------ 124
643535M ------- 124
643536M ------- 124
643536S ------ 124
643538M ------- 124
643538S ------ 124
643540M ------- 124
643540S ------ 124
643541M ------- 124
643542M ------- 124
643542S ------ 124
643543M ------- 124
643544M ------- 124
643544S ------ 124
643546M ------- 124
643546S ------ 124
643548M ----- 124
643548S ------ 124
643550M ----- 124
643550S -------124
643552S -------124
643554S --------124
643555M ------124
643556S -------124
643558S -------124
643560M--------124
643560S -------124
643562S -------124
643564S -------124
643565M--------124
6452-18F -------- 93
6452-30F -------- 93
6452DK ---------- 93
6463-08C -------196

65xxx

651017M ------122
651018M ------122
651019M ------122
651021M ------122
651022M ------122
651023M ------122
651024M ------122
651026M ------122
651027M ------122
651028M ------122
651029M ------122
651030M ------122
6511-10A ------195
6511-10C -------195
6511-13C -------195
6511-17C -------195
651417M--------125
651419M--------125
651420M--------125
651421M--------125
651514M--------122
651515M--------122
651516M--------122
651517M--------122
651518M--------122
651519M--------122
651521M--------122
651522M--------122
651523M--------122
651524M--------122
651525M--------122
651526M--------122
651527M--------122
651528M--------122
651529M--------122
651530M--------122
6516-10 ---------195
6516-10A -------199
653017M--------122
653019M--------122
653021M--------122
653022M--------122
653023M--------122
653024M--------122
653026M--------122
653027M--------122
653028M--------122

Index

653029M------- 122
653030M------- 122
653032M------- 122
653033M------- 122
653034M------- 122
653035M------- 122
653036M------- 122
653038M------- 122
653040M------- 122
653041M------- 122
653042M------- 122
653046M------- 122
653063M------- 122
653065M------- 122
653070M------- 122
6531-10 -------- 187
6531-12 -------- 187
6531-14 -------- 187
6531-18 -------- 187
6531-24 -------- 187
6531-36 -------- 187
6531-48 -------- 187
653517M------- 123
653518M------- 123
653519M------- 123
653521M------- 123
653522M------- 123
653522S ------ 123
653523M------- 123
653524M------- 123
653524S ------ 123
653526M------- 123
653526S ------ 123
653527M------- 123
653528M------- 123
653528S ------ 123
653529M------- 123
653530M------- 123
653530S ------ 123
653532M ----- 123
653532S ------ 123
653533M------- 123
653534M------- 123
653534S ------ 123
653535M------- 123
653536M------- 123
653536S ------ 123
653538M------- 123
653538S ------ 123
653540M------- 123
653540S ------ 123
653541M------- 123
653542M------- 123
653542S ------ 123
653543M------- 123
653544M------- 123
653544S ------ 123
653546M------- 123
653546S ------ 123
653548M------- 123
653548S ------- 123
653550M------- 123
653550S ------- 123
653552M------- 123
653552S--------123
653554M -------123
653554S--------123
653555M -------123
653556S ------123
653557M -------123
653558M -------123
653558S ------123
653560M -------123
653560S ------123
653562S ------123
653563M -------123
653564S ------123
653565M -------123
653566S ------123
653568S ------123
653570S ------123
653572S ------123
653574S--------123
653576S ------123
6572-20 ---------- 93
6572DK ---------- 93
6581-12 ---------- 93
6581-18 ---------- 93

66xxx

6605-08---------200
6615-06---------201
6615-11---------201
6615-18---------201
6625-06---------201
6625-11---------201
6625-18---------201
6655-09---------201
6665-09---------201

67xxx

6711-06---------195
6716-06A-------199
6721-10---------202
6731-09---------202
6741-06---------202
6779-20F-------- 93
6779DK ---------- 93
6791 ------------- 93
6797 ------------127
6797P -----------127
6798 ------------127
6798P -----------127
67HB-07--------196
67HS-07--------196
67SB-07--------196
67SS-07--------196

68xxx

6814 ------------- 93
6818 ------------- 93
683517M ------125
683519M -------125
683521M ------125
683522M ------125
683523M ------125
683524M ------125
683526M ------125
683527M ------125
683529M ----- 125
683530M ----- 125
683532M ----- 125
6864 ---------- 127
6864P---------- 127
6868 ---------- 127
6868P --------- 127
6874 ---------- 128
6874P --------- 128
68GB-01 ------- 273
68GB-02 ------- 273
68GB-11-------- 273
68GB-16 ------- 273
68GR-01 ------- 273
68GR-11 ------- 273
68GS-11-------- 273
68GS-16 ------- 273
68GQ-01 ------- 273
68GQ-02 ------- 273
68GQ-11 ------- 273
68GQ-16 ------- 273
68HB-05-------- 196
68HB-07-------- 196
68HB-10-------- 196
68HS-05-------- 196
68HS-07-------- 196
68HS-10-------- 196
68RB-01-------- 273
68RB-02-------- 273
68RB-11-------- 273
68RB-16-------- 273
68RR-01 ------- 273
68RR-11-------- 273
68RS-11-------- 273
68RS-16-------- 273
68RQ-01 ------- 273
68RQ-02 ------- 273
68RQ-11 ------- 273
68RQ-16 ------- 273
68SB-05 ------ 196
68SB-07-------- 196
68SB-10-------- 196
68SS-05-------- 196
68SS-07-------- 196
68SS-10-------- 196
68ZZ-01 -------- 273
68ZZ-02 -------- 273

69xxx

6921-05A ------ 196
6921-05C ------ 196
6921-06A ------ 196
6921-06C ------ 196
6921-07A ------ 196
6921-07C ------ 196
693519M ----- 125
693521M ----- 125
693522M ----- 125
693523M ----- 125
693524M ----- 125
693524S ------ 125
693526M ----- 125
693526S ------ 125
693527M------- 125
693528S--------125
693529M -------125
683530M -------125
693530S--------125
693532M -------125
693532S--------125
693534S--------125
693536S--------125
693538S--------125
693540S--------125
6AB12-55-------206

70xxx

7075MR -------- 99
7075MR01 ----- 99
7085MR---------100

71xxx

711002P -------228
7112PR --------102
7113PR --------102
711501P -------228
711502P -------228
711503P -------228
7120PR --------- 97
7120PR01------- 97
715000P--------228
715001P--------228
715002P--------228
715003P--------228
715000R--------228
715001R--------228
715001Z--------228
715002H--------228
715002R--------228
715002Z--------228
715003H--------228
715003R--------228
715003S1 ------228
715003Z--------228
715004H--------228
715004S1 ------228
715004S2 ------228
715005H--------228
715005S1 ------228
715006H--------228
715006S1 ------228
715006T--------228
715007H--------228
715007T--------228
715008H--------228
715008T--------228
715009T--------228
715010T--------228
715015T--------228
715020T--------228
715025H--------228
715025T--------228
715027T--------228
715030T--------228
715035S1 ------228
715040T--------228
715045S1 -----228
715055S1 -----228
715055S2 -----228
715065S1 ---- 228
716502P -------228
717001P -------228
717001Z--------228
717002P -------228
717002Z--------228
717003P -------228
717003Z--------228
717006T--------228
717007T--------228
717008T--------228
717009T ------228
717010T ------228
717015T ------228
717020T ------228
717025T ------228
717027T ------228
717030T ------228
717040T ------228
719001P -------228
719001Z--------228
719002P -------228
719002Z--------228
719003P -------228
719003Z--------228

72xxx

721102P ------ 229
726502P ------- 229
727502P ------- 229

73xxx

731101P ------ 229
731102P ------ 229
731103P ------ 229
731152P ------ 229
731502P ------- 229
731503P ------- 229
731552P ------- 229
734501P ------- 229
734502P ------- 229
734503P ------- 229
734551P ------- 229
734552P ------- 229
736501P ------- 229
736502P ------- 229
736503P ------- 229
736552P ------- 229

74xxx

74010 ---------- 203
74020 ---------- 203
74030 ---------- 203
74040 ---------- 203
74060 ---------- 203
741002P ------ 229
74150 ---------- 203
741502P ------ 229
74160 ---------- 203
74250 ---------- 204
74260 ---------- 204
74270 ---------- 204
74350 ---------- 204
74360 ---------- 204
74407 ---------- 205
74408----------205
74410----------205
74412----------205
74414----------205
74416----------205
745002P --------229
74508----------205
74510----------205
74512----------205
74514----------205
74607----------206
74610----------206
74613----------206
747502P --------229
747503P --------229
74900----------206

75xxx

750-60----------230
7507MR---------101
751-60----------230
751-75----------230
752-60----------230
752-75----------230
753-63----------230
7558MR---------- 98
7572MR---------100
7597MR---------101

76xxx

7606508S -----230
7606510S -----230
7606512S -----230
76103-04 ------241
76104-05 ------241
76105-06 ------241
7614208S -----230
7614210S -----230
7614512S -----230
7616507M------230
7616508M------230
7616508S -----230
7616510M------230
7616510S -----230
7616512S -----230
7616514S -----230
76213-04 ------241
76215-05 ------241
76217-06 ------241
76220-07 ------241
76223-08 ------241
76224-10 ------241
76226-12 ------241
76301-05 ------241
76302-05 ------241
76303-05 ------241
76304-05 ------241
76305-05 ------241
76306-05 ------241
76307-05 ------241
76308-05 ------241
76309-06 ------241
76310-06 ------241
76402-45 ------241
76403-05 ------241

76404-06 ----- 241
76405-65 ----- 241
76406-07 ----- 241
76408-08------- 241
76410-85 ----- 241
76412-09 ----- 241
76414-10 ----- 241
76717-05 ----- 243
76721-06 ----- 243
76724-08 ----- 243
76729-10------- 243

77xxx

7702-25 -------- 230
7702-50 -------- 230
7703-50 -------- 230
7712-02 -------- 230
7712-03 -------- 230
77121-08 ----- 249
77131-06 ----- 249
77131-08 ----- 249
77141-06 ----- 249
77141-08------- 249
77340-20------- 249
77335-25------- 250

78xxx

7811-08 ------- 244
7811-12 ------- 244
7811-16 ------- 244
7811-24 ------- 244
7811-32 ------- 244
7811-40 ------- 244
7821-30 ------- 244
7821-50 -------- 244
7821-80 -------- 244
7822-25 -------- 244
7822-30 -------- 244
7822-35 -------- 244
7822-40 -------- 244
7822-45 -------- 244
7822-50 -------- 244
7823-10 -------- 245
7823-15 -------- 245
7823-20 -------- 245
7833-10 -------- 245
7833-12 -------- 245
7833-15 -------- 245
7833-20 -------- 245
7842-22 -------- 245
7842-28 -------- 245
7842-35 -------- 245
7842-45 -------- 245
7842-60 -------- 245
7851-08 -------- 245
7851-16 -------- 245
7851-24 -------- 245
7851-32 -------- 245
7851-40 -------- 245
7851-48 -------- 245
7851-64 -------- 245

79xxx

79061-12 ----- 249
79061-20------- 249
79061-40 -------249
79083-03C -----248
79083-05C -----248
790831CQ -----248
79084-03C -----248
79084-05C ---248
790841CQ -----248
7911-12 --------246
7912-21---------208
7912-22---------208
7912-23---------208
7921-12---------246
7962-03---------244
7962-04---------244
7962-06---------244
7962-08---------244
7962-12---------244
7963-03---------244
7963-04---------244
7963-06---------244
7963-08---------244
7963-12---------244
79711------------247
7971-07---------207
79900-04 -------250
79900-10 -------250
79900-13 -------250
79900-20 -------250
799001DQ -----250

80xxx

8015MR -------- 96
8015SR ---------- 96

82xxx

8251-08---------- 96
8251-16---------- 96
8260-07---------135
8260-07P-------135
8260-10---------135
8260-10P-------135
8260-13---------135
8260-13P-------135

83xxx

833036M -------- 95
833038M -------- 95
833041M -------- 95
833046M -------- 95
833046S--------- 95
833048S--------- 95
833050M -------- 95
833054M -------- 95
833054S--------- 95
833055M -------- 95
833058M -------- 95
833060M -------- 95
833060S--------- 95
833063M -------- 95
833064S--------- 95
833065M -------- 95
833067M -------- 95
833070M -------- 95
833071M -------- 95
833072S--------- 95
833075M---------95
833076S ---------95
833077M---------95
833080M---------95
833084S ---------95
833094S ---------95
8330A0S---------95

84xxx

8408MP -------- 137
8409MP -------- 137
8410MP -------- 137
8410SP--------- 137
843524M ----- 133
843527M ----- 133
843528M ----- 133
843530M ----- 133
843530S ------- 133
843532M ----- 133
843532S ------- 133
843533M ----- 133
843534M ----- 133
843534S ------- 133
843535M------- 133
843536M ----- 133
843536S ------- 133
843538M ----- 133
843538S ------- 133
843540M ----- 133
843540S ------- 133
843541M ----- 133
843542M ----- 133
843542S ------- 133
843544S ------- 133
843546M ----- 133
843546S ------- 133
843548M ----- 133
843548S ------- 133
843550M ----- 133
843550S ------- 133
843552M ----- 133
843552S ------- 133
843554M ----- 133
843554S ------- 133
843555M ----- 133
843556S ------- 133
843558M ----- 133
843558S ------- 133
843560M ----- 133
843560S ------- 133
843562S ------- 133
843564S ------ 133
843566S ------ 133
843568S ------ 133
843570S ------ 133
843572S ------ 133

85xxx

851417M------- 134
851419M------- 134
851420M------- 134
851421M------- 134
851422M------- 134
851426S ------- 134
853417M------- 134
853419M -------134
853421M -------134
853519M -------131
853521M -------131
853522M -------131
853523M -------131
853524M -------131
853524S --------132
853525M -------131
853526M -------131
853526S --------132
853527M -------131
853528M -------131
853528S --------132
853529M -------131
853530M -------131
853530S --------132
853532M -------131
853532S --------132
853533M -------131
853534M -------131
853534S --------132
853535M -------131
853536M -------131
853536S --------132
853538M -------131
853538S --------132
853540M -------131
853540S ------132
853541M -------131
853542M -------131
853542S ------132
853544M -------131
853544S ------132
853546M -------131
853546S ------132
853548M -------131
853548S ------132
853550M -------131
853550S ------132
853552M -------131
853552S ------132
853553M -------131
853554M -------131
853554S ------132
853555M -------131
853556S ------132
853558M -------131
853558S ------132
853560M -------131
853560S ------132
853562S ------132
853563M -------131
853564S ------132
853565M -------131
853566M -------131
853566S ------132
853568M -------131
853568S ------132
853570M -------131
853570S ------132
853571M -------131
853572S ------132
853574S ------132
853575M------- 131
853576S ------ 132
853578S ------ 132
853580M------- 131
853580S ------ 132
853582S ------ 132
853584S ------ 132
853585M------- 131
853586S ------ 132
853588S ------ 132
853590M------- 131
853590S ------ 132
853592S ------ 132
853594S ------ 132
853596S ------ 132
8535A0S------- 132
8535A4S------- 132
8535A8S------- 132
8535B2S------- 132
8572-25 ---------96
8572DK ---------96
8581-26 ----------96

87xxx

870208-----------50
870311-----------61
870322-----------61
870406-----------50
870410-----------80
870422-----------50
87103 ------------2
87105 ------------1
87106 ------------1
87108 ---------- 243
87110 ------------1
87111 ------------1
8711B ------------2
8720 -----------50
87203 ------------1
8730 -----------61
87301 ------------1
87301-494 ---------1
87301-496 ---------1
87301-498 ---------1
87352 ------------2
8740 -----------80
87401-2 ---------17
87401-3 ---------17
87401-3H --------17
87402 -----------17
87407 -----------17
87411-6B -------16
87411-9B---------16
87421-3B -------16
87432-15 ---------5
87432-22 ---------5
87432-23 ---------5
87432-24 ---------5
87432-26----------5
87432-52 ---------5
87432-5B ---------3
87432-5G ----------3
87434-7B ---------3
87434-7G ----------3
87438-3B ---------- 3
87441-1B --------- 4
87441-3B --------- 4
87502------------- 5
87502-01 --------- 6
87502-02 --------- 6
87502-050--------- 6
87502-051--------- 6
87502-054--------- 6
87502-058 ------- 6
87502-061--------- 6
87502-064--------- 6
87502-068--------- 6
87502-11 --------- 6
87502-12 --------- 6
87711C---------- 18
8772KT------------ 1
8773KT------------ 1
8774KT------------ 1
8776KT------------ 1
8779-32F ------- 97
8779DK --------- 97
8781007KT ------- 2
8781012KT ------- 2
8781013KT ------- 2
8781032KT ------- 2
8797 ----------135
8797P ----------135

88xxx

8816 ------------ 96
883524M--------134
883527M--------134
883529M--------134
883530M--------134
883532M--------134
883533M--------134
883534M--------134
883535M--------134
883536M--------134
883538M--------134
883541M--------134
8866 ----------136
8866P ----------136
8869 ----------136
8869P ----------136

9-xxx

9-10112MR------ 33
9-10115MR------ 33
9-10212MR ----- 33
9-10215MR ----- 33
9-1216MR ----- 28
9-1216MR01---- 28
9-1217MR ----- 36
9-1218MR ----- 28
9-1219MR01---- 28
9-1303MR ------- 32
9-1606MR ------- 36
9-1606MR01---- 36
9-1609MR ------- 31
9-1709MR ----- 28
9-1711MR ------- 28
9-1716MR ------- 36
9-1905MR ------- 33

Index

9-20110MR ------ 32
9-22108MR ------ 29
9-22308PR ------ 29
9-2526MR ------- 32
9-2548CR-------- 24
9-2548CR01 ---- 24
9-30106MR ---- 37
9-30206MR ---- 37
9-31006MR ---- 35
9-31106MR ------ 32
9-31110MR ------ 29
9-31909PR ------ 31
9-31919MR ---- 34
9-3523MR ------ 30
9-40102GP ------ 25
9-40103GP ------ 33
9-40203GP ------ 37
9-40207GP ------ 29
9-40207GP01--- 29
9-40604GP ------ 31
9-4116FR -------- 36
9-4119PR -------- 32
9-4120PR -------- 32
9-4128FR -------- 32
9-42114GP ------ 25
9-42144GP ------ 31
9-4319MR ------- 36
9-4319MR01 ---- 36
9-4328MR ------- 26
9-4333MR ------- 26
9-4338MR ------- 34
9-4338MR01 ---- 34
9-4338MR03 ---- 34
9-4516MR ------- 26
9-4522MR ------- 27
9-4526MR ------- 24
9-5575MR ------- 27
9-7069CR ------ 24
9-7069CR01 ---- 24
9-7540MR ------- 27
9-90103PP ------ 30
9-90103PP01 --- 30
9-90104GP ------ 35
9-90106SR ------ 31
9-90109MN ---- 28
9-90115MR ---- 37
9-90120MR------ 37
9-90121MR ---- 35
9-90125MR ---- 37
9-90126MR ---- 35
9-90128SR ------ 25
9-90129CR ------ 25
9-90131MR ---- 30
9-90138CR ------ 26
9-90205GN ---- 30
9-90205GN01 - 30
9-90310MR ---- 29
9-90315MR ---- 28
9-90408TQ ------ 34
9-91120MR ------ 28

90xxx

901-068MR ------ 20
901-069MR ------ 20
901-073MR ----- 20
902-062MR ----- 21
902-065MR ----- 21
902-065MR04 -- 21
902-068MR ----- 22
902-089MR01 -- 22
902-103MR ----- 23
9033CR ---------- 98
90401----------- 117
90402----------- 117
90403----------- 128
90404----------- 128
90405----------- 128
90406----------- 136
90408----------- 107
90409----------- 107
90601----------- 117
90602 ---------- 117
90603 ---------- 128
90604 ---------- 128
90605 ---------- 136
90606 ---------- 136
90607 ---------- 128
90608 ---------- 107
90609 ---------- 107
9063MR -------- 99
9063MR01 ----- 99

91xxx

911-000CR------ 19
911-000CR01 -- 19
911-000CR02 -- 19
91162MR -------183
91168MR -------183
91230-----------220
91232-----------216
91248-----------242
91249-----------242
91262MR -------183
91268MR -------183
91403---------- 2
91404---------- 2
91406---------- 2
91408---------- 2
91421-01 ------ 2
91421-11 ------ 2
91431 ---------- 1
91522H/S ------245
91528H/S ------245
91535H/S ------245
91545H/S ------245
91560H/S ------245

92xxx

92543MR-------102

93xxx

932-000MR ----- 10
932-008MR ------11
932-009MR ----- 14
932-010MR ----- 13
934-001MR ----- 12
938-001MR ----- 15

94xxx

941-000MR ------- 9

95xxx

9507MR ------- 101
953532M------- 138
953533M------- 138
953534M------- 138
953536M------- 138
953538M------- 138
953541M------- 138
953542M------- 138
953546M------- 138
953550M------- 138
953555M------- 138
953560M------- 138
953565M------- 138
953570M------- 138
953575M------- 138
953580M------- 138
953585M------- 138
953590M------- 138
953595M------- 138
9535A0M------- 138
9535A5M------- 138
9535B0M------- 138
9535B5M------- 138
9535C0M ------ 138
9535C5M ------ 138
9535D0M ------ 138
9535D5M ------ 138
9535E0M------- 138
9535F0M------- 138
9563MR --------99
9563MR01-------99

98xxx

9868------------ 138
9868P----------- 138

9Axxx

9AA21 ---------- 251
9AA31 ---------- 251
9AC125-32 ---- 252
9AC125-40 ---- 252
9AC175-32 ---- 252
9AC175-40 ---- 252
9AC175-66 ---- 252
9AD11 ---------- 251
9AE2-6606 ---- 253
9AE2-7476 ---- 253
9AE2-7612 ---- 253
9AE2-7614 ---- 253
9AE2-8616 ---- 253
9AE2-8618 ---- 253
9AE2-9210 ---- 253
9AE2-9315 ---- 253
9AE2-9345 ---- 253
9AE2-9618 ---- 253
9AE2-10615--- 253
9AE2-10815--- 253
9AE2-10818--- 253
9AE221--------- 254
9AE41 ---------- 253
9AE42 ---------- 254
9AE423--------- 254
9AE52 ---------- 254
9AH11 ----------254
9AH025 ---------255
9AL11----------255
9AL12 ----------255
9AR11 ----------256
9AP100 ---------252
9AP120 ---------252
9AP160 ---------252

9Bxxx

9BA11 ----------257
9BA21 ----------257
9BA22 ----------257
9BC11 ----------258
9BC121 ---------258
9BC122 ---------258
9BC124 ---------258
9BC21 ----------259
9BC22 ----------259
9BC23 ----------259
9BE11 ----------260
9BE21 ----------260
9BF11 ----------260
9BF21 ----------260
9BF31 ----------261
9BG11----------261
9BJ11----------261
9BK11 ----------262
9BK41-53-------262
9BU111---------263
9BU111T--------263
9BU112 ---------263
9BU112T -------263
9BU241 ---------264
9BU241T -------264
9BU242 ---------264
9BU242T -------264
9BU251 ---------264
9BU251T -------264
9BU252 ---------264
9BU252T -------264

9Cxxx

9CF-107 --------266
9CF110----------265
9CF-207 --------266
9CF120 ---------265
9CF130 ---------265
9CF131 ---------265
9CF132 ---------265
9CF210 ---------265
9CF220 ---------265
9CF230 ---------266
9CF240 ---------266
9CF241 ---------266
9CF-307 --------266
9CJ023----------268
9CJ033----------269
9CJ1112 --------267
9CJ1130 --------267
9CJ2112 --------268
9CJ2120 --------268
9CJ2212 --------268
9CJ3104 --------269
9CJ3105 --------269
9CJ3106 ------- 269
9CJ61-40 ------ 269
9CK-101-------- 277

9Dxxx

9DB201--------- 270
9DC22 ---------- 270
9DC23 ---------- 270

9Txxx

9TA21A--------- 271
9TA23A--------- 271
9TB225--------- 277
9TC101--------- 272
9TD014MR ---- 272
9TD401-06M -- 272
9TD401-08M -- 272
9TD401-10M -- 272
9TD401-12M -- 272
9TE11----------- 276
9TK014--------- 276
9TK108--------- 276
9TK112 --------- 276
9TK118 --------- 276
9TK124--------- 276
9TP11----------- 277

Axxx

ADFLAG -------A15
ADFLAG1------A15
ADHSTK-KT --A15
ADSTK-A ------A15
ADSTK-H ------A15
ADSTK-P ------A15
ADSTK-T-------A15
ADVT-A---------A15
ADVT-H---------A15
ADVT-P---------A15
ADVT-T---------A15

Cxxx

CPSTK-G1 ----A15
CPSTK-G2 ----A15
CPSTK-G3 ----A15

Zxxx

ZS104----------A13
ZS105----------A13
ZS106----------A13
ZS107----------A13
ZS108----------A13
ZS109----------A14
ZS110----------A14
ZS111----------A14
ZS112----------A14
ZS113----------A13
ZS203----------A13
ZS208----------A16
ZS402----------A13
ZS403----------A13
ZS405----------A13
ZS510----------A16
ZS511----------A16
ZS512----------A16
ZS520----------A14
ZS521----------A14
ZS522----------A16
ZS524 ---------- A16
ZS526 ---------- A16
ZS529 ---------- A16
ZS531 ---------- A16
ZS533 ---------- A16
ZS534 ---------- A16
ZS535 ---------- A16
ZS603 ---------- A16
ZV001 ----------166

KINGTONY TOOLS CO., LTD.

http://www.kingtony.com
sales department e-mail: sales@kingtony.com.tw
customer service e-mail: service@kingtony.com.tw

CAT2011-0